



## Changing the LED Board on an FX Uplight

**STEP  
1**




It's always a good idea to change LED boards and lamps with power to the fixture turned off completely.

**STEP  
2**



Remove the top shroud from the fixture.

**STEP  
3**

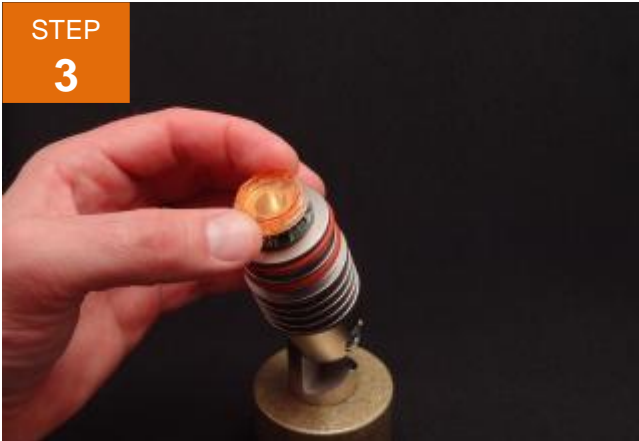


Remove any filters attached to the fixture by carefully twisting them counterclockwise

**STEP  
4**




Remove the two screws holding the reflector to the fixture.

**STEP  
5**

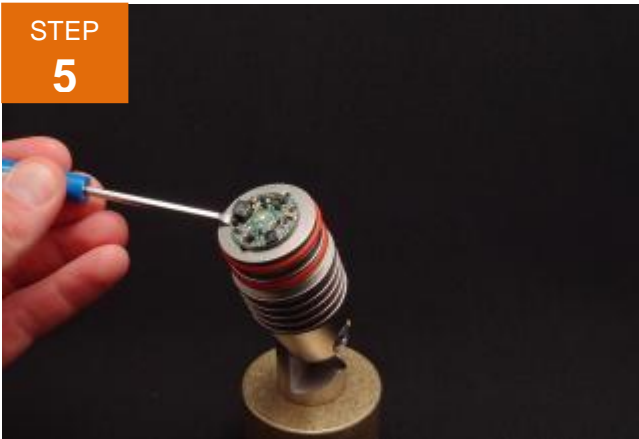

The LED board can now be removed. Using a small soft edged pry device gently pry up on one side of the board. Make sure the base of the fixture where the LED was removed from is clear of debris or residual thermal pad material.

**STEP  
6**

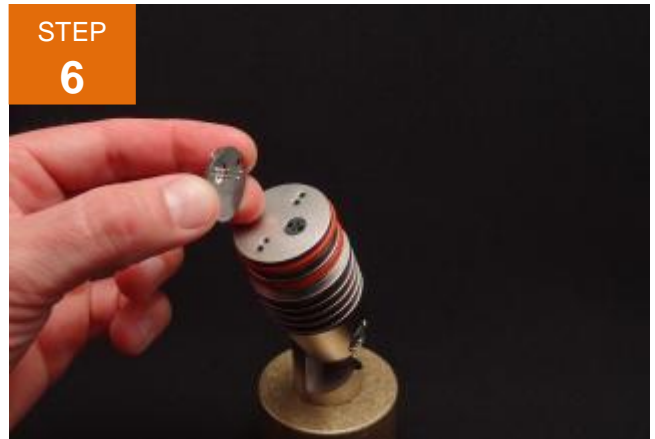

Once the LED is successfully removed this procedure can be performed backwards to install the replacement board. Replacement boards will have to be the same size LED to fit properly. All new FX LED boards come with a clear plastic coating on the back of the thermal pad; this must be removed prior to installation.