




*The LX Transformer is the industry's first fully digital lighting control transformer. The integrated LCD screen provides current time, photocell, function, and line output readouts. Since its digital display is backlit, adjustments can easily be made 24 hours a day. And with flexible scheduling options and real-time status readouts, the LX provides the ultimate in system reliability and efficiency.*

## LX: Transformer

MODELS:	150 or 300 Watt
FINISHES:	Stainless Steel or Matte Gray Powder Coat
ACCESSORY:	26' Remote Mount Photocell
DEPTH:	5.04" / 128.02 cm
WIDTH:	7.14" / 181.41 cm
HEIGHT:	11.4" / 289.43 cm

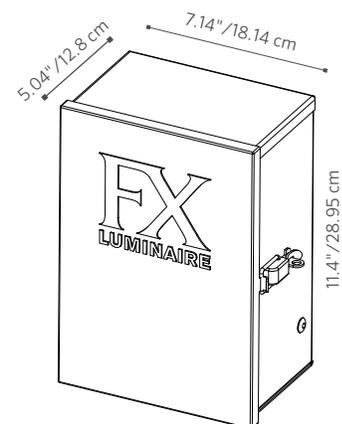



# LX: Transformer

**FACTORY INSTALLED OPTIONS:** Order 1 + 2 + 3

Step	Description	Code
1	TRANSFORMER	LX
2	SIZE	150, 300
3	FINISH	SS, M

EXAMPLE: **LX-150-M** = LX Transformer -150W - Matte Gray Finish

**FEATURES:**

- **Full Digital Control:** All functions are controlled by the integrated LCD Screen for a complete real-time output of functions
- **6 On/Off Times:** Add different start and stop times using the photocell or a given time on different days of the week
- **Active Load Draw Bar:** Digital Readout of system load usage displayed as a bar in 10% increments
- **Real Time Photocell Readout:** Always know what the photocell is sensing with its easy to identify sun and moon
- **Internal Clock and Timing:** Adjust lights to illuminate at a given time of day or use the photocell in conjunction
- **Status LEDs:** Displays readouts and readiness of the 120V, External Function, Photocell activity, and 12V output
- **Backlit Display:** Backlit display panel allows you to see status at night
- **Conduit Pathway:** Leave the transformer mounted and install conduit to the system using the handy removable front conduit pathway
- **12V Photocell Included and Preinstalled:** Smaller size with less wiring
- **Petite Box:** Houses all power and control functions
- **Removable Door:** Allows easy conduit installation and “as built” note writing
- **Flip Up Display:** Display flips up and pushes out of the way to access all wiring
- **Integrated Backup Battery:** Saves time and settings in the event of a power outage

**METALS**

 **SS** = Stainless Steel

**POWDER COAT**

 **M** = Paintable Matte Gray

*The LX comes standard in stainless steel, with a photocell and a 3' power cord.*

