

# PRODUCT CATALOG

Landscape & Architectural Lighting

FXLuminaire®





# TABLE

---

## *FX Luminaire*

Advanced Outdoor Lighting Solutions	3
What's New at FX Luminaire	5
Designer Series and Standard Series	7
Lamps	125
Technical Data	131
Warranty	147
Education, Tools, and Support	143
CE Certified Lighting Products	146
Index	148

---

## *Lighting Control*

Luxor® System	109
Luxor Controllers	113
Luxor Accessories	117
Transformers and Controllers	121



# OF CONTENTS

---

## *Designer Series*

Up Lights	13
Path and Area Lights	21
Wall Lights	31
Down Lights	39
Specialty Lights	49

## *Standard Series*

Up Lights	55
Path and Area Lights	63
Wall Lights	75
Down Lights	81
Specialty Lights	87

---

## *Value Line*

---

## *C-Line*

---

## *Line-Voltage Series*

---

## *Accessories*

# FX LUMINAIRE


Advanced Outdoor  
Lighting Solutions



---

*FX Luminaire* provides industry-leading landscape and architectural lighting solutions for line- and low-voltage installations. We focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities.

*Our energy-efficient lighting fixtures are specially designed to create world-class lighting systems for a range of classic and contemporary applications.*



*From high-tech controllers to a complete spectrum of fixtures and accessories, our products provide endless opportunities for the ultimate outdoor lighting experience.*

A photograph of an outdoor kitchen at dusk or night. The kitchen features a white countertop with a built-in grill, a large black ceramic kamado-style cooker, and a stone pizza oven. The scene is illuminated by warm, ambient lighting, including a recessed light in the wall and a small light fixture on the ceiling. The background shows a house with a window and some foliage.

# WHAT'S NEW at FX Luminaire

---

*To keep us at the forefront* of outdoor lighting technology, we consistently strive to develop innovative solutions that push the boundaries of engineering.

*When you choose FX Luminaire lighting products, you get more than timeless design and top-quality materials — you get the best technology the industry has to offer.*



LUXOR



SL WALL LIGHTS



MODERN PATH LIGHTS



HP-48 PAVER LIGHT



LINE-VOLTAGE SERIES



MR-16 LAMPS

---

*Our most recent innovations include advanced lighting controllers, new path and area lighting fixtures, line-voltage solutions, and high-efficiency LED replacement lamps.*

---




# DESIGNER SERIES & Standard Series

---

*Our convenient fixture* classification system is based on material construction, performance, and price. This helps you quickly identify similar fixtures and create lighting systems for every project and budget. All FX Luminaire fixtures are made with top-quality materials and backed by the best customer and technical support in the industry.

*Easily compare and choose fixtures that fit the control and environmental needs of your project.*



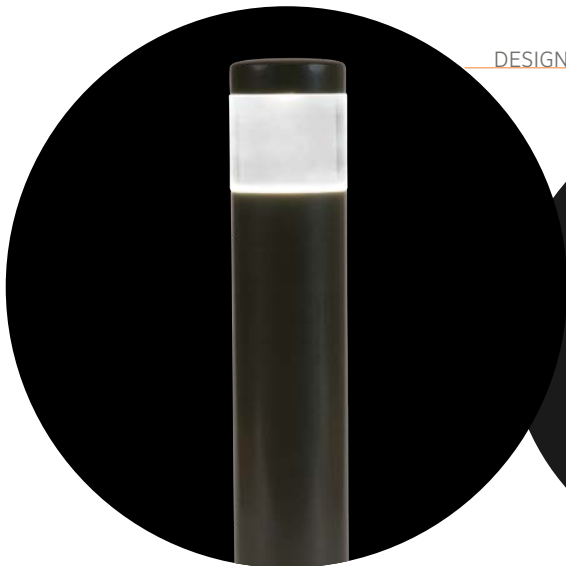

DESIGNER AND STANDARD LIGHTS



---

FX LUMINAIRE OFFERS  
FIXTURES FOR EVERY  
PROJECT AND BUDGET.

---

# How to Select the Perfect Lighting System



# The Right Light for Every Project



## DESIGNER SERIES

Base	Plus	Premium
<b>Popular</b> FB, PL	<b>Popular</b> NP, PB, PM, JB, NL, LE, M-PL	<b>Popular</b> FR, CC, LC, DM, LF, PO-SQ, VE-PS, KG, LP, BQ
<b>Additional Options</b> QZ, QB, TM, QT, PE	<b>Additional Options</b> LC, RW, MS, DE, VE, PS, M-PJ, M-PK, M-PZ, SD, RC, HP-48, SL, VC, ZW, ZC W	<b>Additional Options</b> NR, VS, PB, DM, MO, CP, UN, LM, PD, LE, PS, NL, FC, LL, VO, ZW, ZC, KT




## STANDARD SERIES

Base	Plus	Premium
<b>Popular</b> RS, SP-A, WS, BP	<b>Popular</b> MU, TM, MM, MD, C-UL, C-WW, C-PL, C-LL, C-IN	<b>Popular</b> LR, LO, RL, CA, MM, TE, CP, LS, TS
<b>Additional Options</b> DR, DS, PD, CF, UN, RP, FC	<b>Additional Options</b> MP, AL, PL, PM, MD, TS, C-DL, RP, DL-A, CA-A, DM-A, C-WWL	<b>Additional Options</b> MR, PF, PR, SC, CV, DM, TD/FG, GT, DP, DL, SP, GN, GT, BP, CG, CP, LM, UN, PD, VL, CL, TC, FC, RP

# FX Luminaire Designer Series

When you choose an FX Luminaire LED lighting system, you get the latest LED landscape lighting technology and digital lighting control with zoning, dimming, color temperature, and beam angle options.

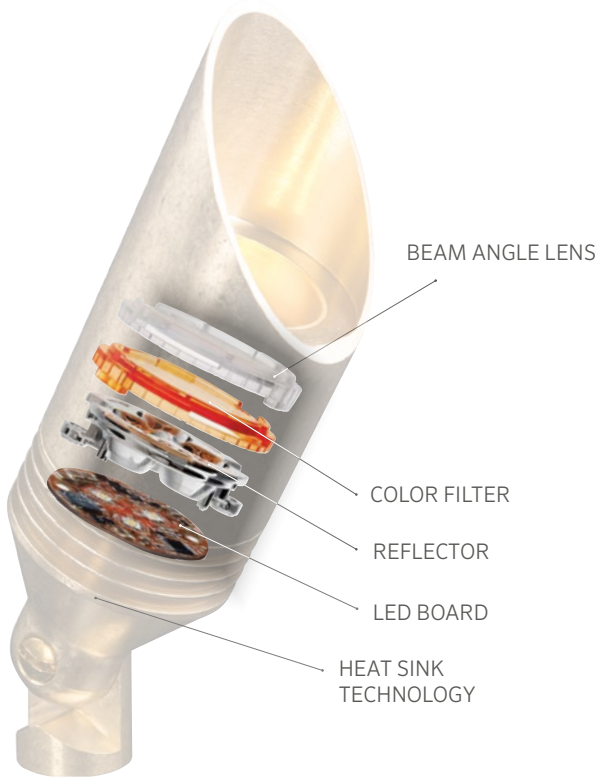

*What is the difference between using retrofit LED lamps and an integrated LED system?*

**Answer:** An integrated LED fixture is engineered for optimum performance. These fixtures have a fully managed heat dissipation system. The focus on heat management reduces the threat of LED color shift and overheating. The built-in optics platform provides a simple configuration for adjusting color temperature and beam angle.

FX Luminaire LED systems offer total control over your lighting design. Control is the future of lighting. **When control, longevity, effects, and ease of installation are important factors, the Designer Series is the best option.**


## FX Luminaire LED Lighting Solutions

	Luxor Integrated System	Integrated System	Standard MR-16 System
	DESIGNER PREMIUM	DESIGNER PLUS	STANDARD
<b>LED Warranty</b>	10 years	10 years	5 years
<b>Color</b>	30,000+ Colors	4 Color Filters	Fixed
<b>Beam Angle</b>	Wide Flood	Interchangeable	Fixed
<b>Control</b>	Zoning, Dimming, and Color	Zoning and Dimming (Color Optional)	On/Off
<b>Thermal Management</b>	Global	Global	Local
<b>Lamp Life</b>	55,000 Hrs*	55,000 Hrs*	40,000 Hrs*

\* Note: Useful LED life L90B10 (Avg.); Input voltage: 10 to 15 V.

*Is the beam angle adjustable?*

**Answer:** Yes, FX Luminaire integrated LEDs offer four beam angle options for maximum design flexibility. Adjust to your preference with narrow, flood, or wide flood lenses ranging from 10° to 60°. Similar to the color filters, these laser-cut lenses simply snap onto integrated LEDs.



A modern outdoor landscape lighting fixture is the central focus, standing in a garden bed. The fixture has a dark, conical top with a glowing light source inside, and a slender, dark pole. The garden bed is filled with mulch, a large pink flower in the foreground, and various green plants and grasses. In the background, a house with a stone wall and a window is visible, with another light fixture glowing. The scene is set at dusk, with a soft blue sky and distant mountains.

*When control, longevity, effects, and ease of installation are important factors, the Designer Series is the best option.*

# DESIGNER SERIES

## Up Lights



---

*Elegantly engineered* for peak performance, FX Luminaire up lights convey intelligent design from the ground up. From wall washes to spots, we have the perfect fixture for every application.

*Angled lenses effortlessly direct water away from the fixtures, while ProAim<sup>®</sup> adjustability allows fixtures to be aimed in indexed increments for added reliability.*



SPOT LIGHT AND WALL WASH LIGHT



Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



Indicates certified wildlife-friendly products

## LL DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Compliance	Shroud Option	Finish
FB <sup>◊</sup>	[blank] Zone	1LED 60 Lumens* 2.0W/2.4VA	[blank] ½" Thread (UL)	[blank] 45° Angled Shroud	BZ DG WI FB SV WG <sup>†</sup> FW <sup>†</sup> AL <sup>†</sup> SV <sup>†</sup>
	ZD Zone/ Dim	3LED 165 Lumens* 4.2W/4.5VA	e Bracket Mount (CE)		
	ZDC <sup>‡</sup> Zone/ Dim/ Color	[blank] ZDC with 90 Lumens* 6.0W/7.2VA			

**ORDERING EXAMPLE:** ▶ FB-ZDC-BZ = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 8.1" (206 mm)  
Diameter: 2.5" (64 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Straight Coupling	COUP-XX**	Hex Baffle (MR-16)	250015260000
SJ-Box	SJ-XX**	90° Elbow Fitting	ELBW-050-XX**	Flood Lens	Δ-LEDFLENS
Straight Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Wide Flood Lens	Δ-LEDWFLENS



## NP DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Shroud Option	Finish
NP <sup>◊</sup>	[blank] Zone	3LED 135 Lumens* 4.2W/4.5VA	[blank] ½" Thread (UL)	[blank] 45° Angled Shroud	BZ DG WI SB FB WG <sup>†</sup> FW <sup>†</sup> AL <sup>†</sup> SV <sup>†</sup>
	ZD Zone/ Dim	6LED 279 Lumens* 8.2W/9.7VA	e Bracket Mount (CE)	LS 60° Angled Long Shroud	
		9LED 357 Lumens* 10.0W/10.7VA			
	ZDC <sup>‡</sup> Zone/ Dim/ Color	[blank] ZDC with 110 Lumens* 9.1W/11.0VA			

**ORDERING EXAMPLE:** ▶ NP-ZDC-BZ = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 8.5" (216 mm)  
Long Shroud: 10.4" (264 mm)  
Diameter: 2.7" (69 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Straight Coupling	COUP-XX**	Hex Baffle (MR-16)	250015260000
SJ-Box	SJ-XX**	90° Elbow Fitting	ELBW-050-XX**	Flood Lens	Δ-LEDFLENS
Straight Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Wide Flood Lens	Δ-LEDWFLENS



Powder Coat: Standard



Powder Coat: Specialty



<sup>†</sup> Non-returnable <sup>‡</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens



**FR** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
FR <sup>◊</sup>	[blank] Zone	1LED 65 Lumens* 2.0W/2.4VA	LS 45° Angled Long Shroud	CU AB* AT* NP**
	ZD Zone/ Dim	3LED 167 Lumens* 4.2W/4.5VA	[blank] 1.0" (25 mm) Straight Shroud	
	ZDC <sup>◊</sup> Zone/ Dim/ Color	[blank] ZDC with 113 Lumens* 6.0W/7.2VA		

**ORDERING EXAMPLE:** ▶ FR-ZD-3LED-CU = FIXTURE-LUXOR OPTION-LED-FINISH


<sup>◊</sup> Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 6.1" (155 mm)  
 Long Shroud: 7.0" (178 mm)  
 Diameter: 2.0" (50 mm)  
 Lead: 10' (3 m)  
 Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Hex Baffle (MR-11)	250015250000
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	Flood Lens	Δ-LEDFLENS
Ground Mount	GM-XX**	ProAim Ratcheting Spike	PARS	Wide Flood Lens	Δ-LEDWFLENS



**NR** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
NR <sup>◊</sup>	[blank] Zone	3LED 208 Lumens* 4.2W/4.5VA	LS 45° Angled Long Shroud	CU AB* AT* NP**
	ZD Zone/ Dim	6LED 397 Lumens* 8.2W/9.7VA	[blank] 1.5" (38 mm) Straight Shroud	
		9LED 430 Lumens* 10.0W/10.7VA		
	ZDC <sup>◊</sup> Zone/ Dim/ Color	[blank] ZDC with 117 Lumens* 9.1W/11.0VA		

**ORDERING EXAMPLE:** ▶ NR-ZD-3LED-LS-CU = FIXTURE-LUXOR OPTION-LED-SHROUD OPTION-FINISH

<sup>◊</sup> Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 6.1" (155 mm)  
 Long Shroud: 7.4" (188 mm)  
 Diameter: 2.5" (64 mm)  
 Lead: 10' (3 m)  
 Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Hex Baffle (MR-16)	250015260000
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	Flood Lens	Δ-LEDFLENS
Ground Mount	GM-XX**	ProAim Ratcheting Spike	PARS	Wide Flood Lens	Δ-LEDWFLENS



**Metal**



† Non-returnable ◊ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## CC DESIGNER PREMIUM



Long Shroud

Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
CC <sup>o</sup>	[blank] Zone	1LED 62 Lumens* 2.0W/2.4VA	LS 45° Angled Long Shroud	BS AB* AT* NP**
	ZD Zone/Dim	3LED 124 Lumens* 4.2W/4.5VA	[blank] 0.5" (13 mm) Straight Shroud	
	ZDC <sup>o</sup> Zone/Dim/ Color	[blank] ZDC with 109 Lumens* 6.0W/7.2VA		

ORDERING EXAMPLE: ▶ CC-ZD-3LED-BS = FIXTURE-LUXOR OPTION-LED-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.3" (160 mm)  
Long Shroud: 7.2" (183 mm)  
Diameter: 1.6" (41 mm)  
Lead: 10' (3 m)  
Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Hex Baffle (MR-11)	250015250000
VersaBox	VB-050-XX**	ProAim Ratcheting Spike	PARS	Flood Lens	Δ-LEDFLENS
SJ-Box	SJ-XX**	3-Prong Spike	250020020000	Wide Flood Lens	Δ-LEDWFLENS
Ground Mount	GM-XX*				



## VS DESIGNER PREMIUM



Long Shroud

Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
VS <sup>o</sup>	[blank] Zone	3LED 159 Lumens* 4.2W/4.5VA	LS 45° Angled Long Shroud	BS AB* AT* NP**
	ZD Zone/Dim	6LED 300 Lumens* 8.2W/9.7VA	[blank] 1.0" (25 mm) Straight Shroud	
		9LED 360 Lumens* 10.0W/10.7VA		
	ZDC <sup>o</sup> Zone/Dim/ Color	[blank] ZDC with 110 Lumens* 9.1W/11.0VA		

ORDERING EXAMPLE: ▶ VS-ZDC-BS = FIXTURE-LUXOR OPTION-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

### Dimensions

Height: 7.5" (191 mm)  
Long Shroud: 8.2" (208 mm)  
Diameter: 2.5" (64 mm)  
Lead: 10' (3 m)  
Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Hex Baffle (MR-16)	250015260000
VersaBox	VB-050-XX**	ProAim Ratcheting Spike	PARS	Flood Lens	Δ-LEDFLENS
SJ-Box	SJ-XX**	3-Prong Spike	250020020000	Wide Flood Lens	Δ-LEDWFLENS
Ground Mount	GM-XX*	Junction Box Spike Kit	EKITSPIKE		



### Metal



+ Non-returnable <sup>o</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens



**QZ** DESIGNER

Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
QZ <sup>◊</sup>	[blank] Zone	1LED 62 Lumens 2.0W/2.4VA	[blank] 45° Angled Shroud	BZ DG WI SB FB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup>
	ZD Zone/ Dim			

**ORDERING EXAMPLE:** ▶ QZ-ZD-1LED-BZ = FIXTURE-LUXOR OPTION-LED-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

**Dimensions**

Height: 6.6" (168 mm)  
Diameter: 1.8" (46 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-050-XX**	Straight Coupling	COUP-XX**	Hex Baffle (MR-11)	250015250000
SJ-Box	SJ-XX**	90° Elbow Fitting	ELBW-050-XX**	Flood Lens	1-LEDFLENS
Straight Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Wide Flood Lens	1-LEDWFLENS
Ground Mount	GM-XX**				



**QB** DESIGNER

Fixture	Luxor Option	LED Configuration	Finish
QB <sup>◊</sup>	[blank] Zone	1LED 73 Lumens* 2.0W/2.4VA	BZ DG WI SB FB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup>
	ZD Zone/Dim		

**ORDERING EXAMPLE:** ▶ QB-1LED-BZ = FIXTURE-LED-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

**Dimensions**

Height: 5.0" (127 mm)  
Width: 2.9" (75 mm)  
Depth: 2.2" (55 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Straight Coupling	COUP-XX**	Wall Plate, 1-Gang	WP-1G-050-XX**
Mini J-Box	MJ-050-XX**	90° Elbow Fitting	ELBW-050-XX**	Wall Plate, Round	WP-RD-050-XX**
SJ-Box	SJ-XX**	T-Mount Fitting	TMNT-050-XX**	Mini Mount	MM-050-XX**
Post Mount	PM-XX**	Straight Riser	YY-R-XX**	Variable Height Riser	VHR-UL



Powder Coat: Standard



Powder Coat: Specialty



<sup>†</sup> Non-returnable <sup>◊</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens



## PB DESIGNER PLUS

Fixture	Luxor Option	LED Configuration	Compliance	Finish
PB <sup>◊</sup>	[blank] Zone	1LED 67 Lumens* 2.0W/2.4VA	[blank] ½" Thread (UL)	BZ DG WI SB FB WG*† FW*† AL*† SV*† BS AB* AT* NP*†
	ZD Zone/ Dim	3LED 160 Lumens* 4.2W/4.5VA	e Bracket Mount (CE) (Powder Coat Finishes Only)	
	ZDC <sup>✦</sup> Zone/ Dim/ Color	[blank] ZDC with 122 Lumens* 6.0W/7.2VA		

ORDERING EXAMPLE: ▶ PB-1LED-NP = FIXTURE-LED-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 6.0" (152 mm)  
Width: 3.9" (98 mm)  
Depth: 2.2" (50 mm)  
Lead: 10' (3 m)  
Material: Brass or Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Straight Coupling	COUP-XX**	Copper Riser with Fittings	YY-R-GT-XX**
SJ-Box	SJ-XX**	90° Elbow Fitting	ELBW-050-XX**	Wall Plate, 1-Gang	WP-1G-050-XX**
Aluminum Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Mini Mount	MM-050-XX**



## LC DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Compliance	Finish
LC <sup>◊</sup>	[blank] Zone	3LED 154 Lumens* 4.2W/4.5VA	[blank] ½" Thread (UL)	BZ DG WI SB FB WG*† FW*† AL*† SV*† BS AB* AT* NP*†
	ZD Zone/ Dim	6LED 331 Lumens* 8.2W/9.7VA	e Bracket Mount (CE) (Powder Coat Finishes Only)	
		9LED 436 Lumens* 10.0W/10.7VA		
	ZDC <sup>✦</sup> Zone/ Dim/ Color	[blank] ZDC with 192 Lumens* 9.1W/ 11.0VA		

ORDERING EXAMPLE: ▶ LC-ZDC-BZ = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 6.5" (165 mm)  
Width: 4.5" (114 mm)  
Depth: 3.0" (76 mm)  
Lead: 10' (3 m)  
Material: Brass or Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Mini Mount	MM-050-XX**	Copper Riser with Fittings	YY-R-GT-XX**
Straight Coupling	COUP-XX**	90° Elbow Fitting	ELBW-050-XX**	Wall Plate, 1-Gang	WP-1G-050-XX**
Aluminum Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Junction Box Spike Kit	EKITSPIKE



### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



† Non-returnable ✦ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

*Designer Series up lights are versatile,  
durable, and easy to install.*





# DESIGNER SERIES

## Path and Area Lights


---

*Targeted light delivery* and elegant construction — combined with more finishes, height options, and control capabilities than any other brand — make FX Luminaire path lights second to none.

*Whether you're looking to illuminate a walkway directly or deliver light to the surrounding landscape, our path lights give you unparalleled freedom to create the setting that's right for you.*



AREA AND DIRECTIONAL PATH LIGHTS

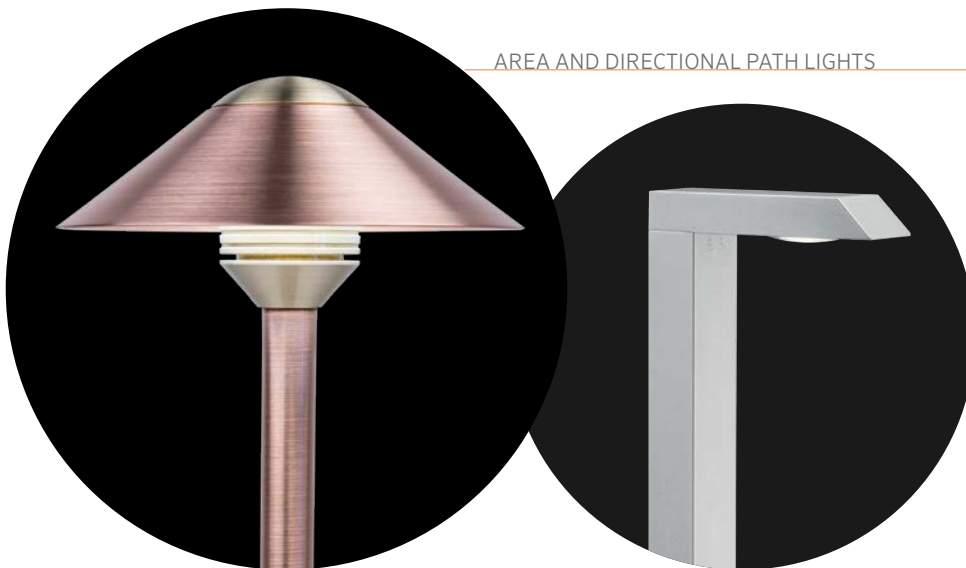

PM-3LED-BZ

Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



Indicates certified wildlife-friendly products

# Petite DESIGNER PREMIUM

**DIMENSIONS**  
Overall Height:  
14.5" (368 mm)<sup>±</sup>  
Diameter: 3.6"  
(92 mm)



**HC**

**DIMENSIONS**  
Overall Height:  
15.1" (384 mm)<sup>±</sup>  
Diameter: 4.0"  
(102 mm)



**PF**

**DIMENSIONS**  
Overall Height:  
14.7" (374 mm)<sup>±</sup>  
Diameter: 3.8"  
(97 mm)



**PR**

**DIMENSIONS**



**SC**

**GENERAL** Riser: ¾" Lead: 10' (3 m)

## PATH LIGHT FINISH CHART

Component (Base Metal)	CU	Powder Coat	AB/AT	NP
Finial (Brass)	Natural Brass	Powder Coated	Antiqued	Nickel Plated
Top (Copper)	Natural Copper	Powder Coated	Antiqued	Nickel Plated
Reducer (Brass)	Natural Brass	Natural Brass	Antiqued	Nickel Plated
Riser (Copper)	Natural Copper	Powder Coated	Antiqued	Nickel Plated



TOP ASSEMBLY



RISER ASSEMBLY

Top Assembly	Top Finish	Riser Type	Luxor Option	LED Configuration	Riser Height	Finish
HCLEDTA	BZ DG WI SB	P <sup>o</sup> (Petite)	[blank] Zone	1LED 19-39 Lumens* 2.0W/2.4VA	8RA 8" (200 mm)	BZ DG WI SB FB WG** FW** AL* SV** CU AB* AT* NP**
PFLEDTA	FB WG** FW**		ZD Zone/ Dim		12RA 12" (300 mm)	
PRLEDTA	AL* SV** CU				18RA 18" (450 mm)	
SCLEDTA	AB* AT* NP**				24RA* 24" (600 mm)	
					36RA* 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **HCLEDTA-CU + P-ZD-1LED-18RA-CU** = TOP ASSEMBLY-TOP FINISH + RISER TYPE- LUXOR OPTION-LED-RISER HEIGHT-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	VersaBox	VB-050-XX**	Ground Mount	GM-XX**
Post Mount	PM-XX**	ProAim Ratcheting Spike	PARS	3-Prong Spike	250020020000



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>†</sup> Non-returnable <sup>♦</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens \* With 12" (300 mm) riser



# Grande DESIGNER PREMIUM



**DIMENSIONS**  
Overall Height:  
15.6" (396 mm)\*  
Diameter: 6.3"  
(159 mm)

**JS**

**DIMENSIONS**  
Overall Height:  
15.5" (394 mm)\*  
Diameter: 7.1"  
(180 mm)

**DM**

**DIMENSIONS**  
Overall Height:  
15.0" (381 mm)\*  
Diameter: 7.1"  
(180 mm)

**CV**

**DIMENSIONS**  
Overall Height:  
15.5" (394 mm)\*  
Diameter: 7.4"  
(188 mm)

**CA**

GENERAL Riser: ¾" Lead: 10' (3 m)

## PATH LIGHT FINISH CHART

Component (Base Metal)	CU	Powder Coat	AB/AT	NP
Finial (Brass)	Natural Brass	Powder Coated	Antiqued	Nickel Plated
Top (Copper)	Natural Copper	Powder Coated	Antiqued	Nickel Plated
Reducer (Brass)	Natural Brass	Natural Brass	Antiqued	Nickel Plated
Riser (Copper)	Natural Copper	Powder Coated	Antiqued	Nickel Plated



TOP ASSEMBLY



RISER ASSEMBLY

Top Assembly	Top Finish	Riser Type	Luxor Option	LED Configuration	Riser Height	Finish
JSLEDTA DMLEDTA CVLEDTA CALEDTA	BZ DG WI SB FB WG** FW† AL† SV† CU AB* AT* NP†	G° (Grande)	[blank] Zone	1LED 39 Lumens* 2.0W/2.4VA	8RA 8" (200 mm)	BZ DG WI SB FB WG** FW** AL** SV** CU AB* AT* NP**
			ZD Zone/ Dim	3LED 103 Lumens* 4.2W/4.5VA	12RA 12" (300 mm)	
			ZDC† Zone/ Dim/ Color	[blank] ZDC with 67-73 Lumens* 6.0W/7.2VA	18RA 18" (450 mm)	
					24RA* 24" (600 mm)	
					36RA* 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ CALEDTA-CU + G-3LED-12RA-CU = TOP ASSEMBLY-TOP FINISH + RISER TYPE- LED-RISER HEIGHT-FINISH

† Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	VersaBox	VB-050-XX**	3-Prong Spike	250020020000
Post Mount	PM-XX**	ProAim Ratcheting Spike	PARS	Ground Mount	GM-XX**




G-3LED-18RA-CU  
DM-LED-TA-CU  
JS-LED-TA-CU

Powder Coat: Standard



Powder Coat: Specialty



Metal



† Non-returnable † Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code † Total delivered lumens † With 12" (300 mm) riser

TM DESIGNER

PL DESIGNER



**DIMENSIONS**  
 Height: 14.8" (376 mm)<sup>‡</sup>  
 Diameter: 5.0" (127 mm)  
 Material: Aluminum

**DIMENSIONS**  
 Height: 15.4" (391 mm)<sup>‡</sup>  
 Diameter: 6.0" (152 mm)  
 Material: Aluminum

**GENERAL**  
 Riser: ¾"  
 Lead: 10' (3 m)



Top Assembly	Top Finish	Riser Type	Luxor Option	LED Configuration	Riser Height	Finish
TMLEDTA PLLEDTA	BZ DG WI SB FB WG*† FW*† AL*† SV*†	A° (Aluminum)	[blank] Zone	1LED 25-44 Lumens* 2.0W/2.4VA	8RA 8" (200 mm)	BZ DG WI SB FB WG*† FW*† AL*† SV*†
			ZD Zone/Dim	3LED 80-94 Lumens* 4.2W/4.5VA	12RA 12" (300 mm)	
			ZDC* Zone/Dim/ Color	[blank] ZDC with 83 Lumens* 6.0W/7.2VA	18RA 18" (450 mm)	
					24RA* 24" (600 mm)	
					30RA* 30" (750 mm)	
					36RA* 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **PLLEDTA-BZ + A-3LED-12RA-BZ** = TOP ASSEMBLY-TOP FINISH + RISER TYPE-LUXOR OPTION-LED-RISER HEIGHT-FINISH

◊ Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	ProAim Ratcheting Spike	PARS	Ground Mount	GM-XX**
Post Mount	PM-XX**	Straight Coupling	COUP-XX**	3-Prong Spike	250020020000
VersaBox	VB-050-XX**	Aluminum Riser	YY-R-XX**		




TM-LED-TA-BZ  
 PL-LED-TA-BZ  
 A-3LED-18RA-BZ

Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable ◊ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code † Total delivered lumens ‡ With 12" (300 mm) riser

**FG** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
FG <sup>o</sup>	[blank] Zone	1LED 75 Lumens* 2.0W/2.4VA	BZ DG WI SB FB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup> CU AB* AT* NP*
	ZD Zone/Dim	3LED 167 Lumens* 4.2W/4.5VA	
		6LED 374 Lumens* 8.2W/9.7VA	
		9LED 474 Lumens* 10.0W/10.7VA	
	ZDC* Zone/Dim/ Color	[blank] ZDC with 237 Lumens* 9.1W/11.0VA	

**ORDERING EXAMPLE:** ▶ **FG-ZD-1LED-BZ** = FIXTURE-LUXOR OPTION-LED-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 18.0" (457 mm)  
Diameter: 5.0" (127 mm)  
Lead: 8' (2.4 m)  
Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	<b>SJ-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>	3-Prong Spike	<b>250020020000</b>
Post Mount	<b>PM-XX**</b>	ProAim Ratcheting Spike	<b>PARS</b>		
VersaBox	<b>VB-050-XX**</b>	Ground Mount	<b>GM-XX**</b>		



**TD** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Height Option	Finish
TD <sup>o</sup>	[blank] Zone	1LED 75 Lumens* 2.0W/2.4VA	[blank] Standard 18" (450 mm)	BZ DG WI SB FB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup> CU AB* AT* NP* <sup>†</sup>
	ZD Zone/ Dim	3LED 218 Lumens* 4.2W/4.5VA	XT Extra Tall 30" (750 mm)	
		6LED 404 Lumens* 8.2W/9.7VA		
		9LED 530 Lumens* 10.0W/10.7VA		
	ZDC* Zone/Dim/ Color	[blank] ZDC with 231 Lumens* 9.1W/11.0VA		

**ORDERING EXAMPLE:** ▶ **TD-3LED-CU** = FIXTURE-LED-HEIGHT-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 16.2" (411 mm)  
XT Height: 29.5" (749 mm)  
Diameter: 5.0" (127 mm)  
Lead: 8' (2.4 m)  
Material: Copper/Brass

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	<b>SJ-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>	3-Prong Spike	<b>250020020000</b>
Post Mount	<b>PM-XX**</b>	ProAim Ratcheting Spike	<b>PARS</b>		
VersaBox	<b>VB-050-XX**</b>	Ground Mount	<b>GM-XX**</b>		



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>†</sup> Non-returnable <sup>o</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code <sup>†</sup> Total delivered lumens

## PM DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Height Option	Finish
PM <sup>o</sup>	[blank] Zone	1LED 41 Lumens* 2.0W/2.4VA	[blank] (UL)	[blank] Standard 14" (355 mm)	BZ DG WI SB FB WG**
	ZD Zone/ Dim	3LED 106 Lumens* 4.2W/4.5VA	e (CE)	XT Extra Tall 18.5" (470 mm)	FW**† AL**† SV
		6LED 186 Lumens* 8.2W/9.7VA			
		9LED 219 Lumens* 10.0W/10.7VA			
	ZDC <sup>o</sup> Zone/ Dim/ Color	[blank] ZDC with 74 Lumens* 9.1W/11.0VA			

**ORDERING EXAMPLE:** ▶ **PM-ZD-3LED-XT-SV** = FIXTURE-LUXOR OPTION-LED-HEIGHT OPTION-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

Name	Code
Deck Mount	PDM-XX**

### Dimensions

Height: 14.0" (279 mm)  
 XT Height: 18.5" (470 mm)  
 Diameter: 2.5" (64 mm)  
 Lead: 9' (2.7 m)  
 Material: Aluminum



## RW DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Riser Option	Finish
RW <sup>o</sup>	[blank] Zone	1LED 102 Lumens* 2.0W/2.4VA	[blank] No Riser	BZ DG WI SB FB WG** FW** AL**† SV**†
	ZD Zone/Dim	3LED 168 Lumens* 4.2W/4.5VA	8R 8" (200 mm)	
		6LED 460 Lumens* 8.2W/9.7VA	12R 12" (300 mm)	
		9LED 552 Lumens* 10.0W/10.7VA	18R 18" (450 mm)	
	ZDC <sup>o</sup> Zone/Dim/ Color	[blank] ZDC with 188 Lumens* 9.1W/11.0VA	24R 24" (600 mm)	
			30R 30" (750 mm)	
			36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **RW-3LED-FB** = FIXTURE-LED-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Ground Mount	GM-XX**	Straight Coupling	COUP-XX**	Wall Plate, 1-Gang	WP-1G-050-XX**
Mini J-Box	MJ-050-XX**	90° Elbow Fitting	ELBW-050-XX**	Wall Plate, Round	WP-RD-050-XX**
SJ-Box	SJ-XX**	T-Mount Fitting	TMNT-050-XX**	Mini-Mount	MM-050-XX**
Post Mount	PM-XX**	Straight Riser	YY-R-XX**	Variable Height Riser	VHR-UL



Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable <sup>o</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code † Total delivered lumens

## M-PJ DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
M-PJ <sup>◊</sup>	[blank] Zone	1LED 62 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG**
	ZD Zone/Dim	3LED 151 Lumens* 4.2W/4.5VA	e (CE)	FW** AL** SV**
		6LED 286 Lumens* 8.2W/9.7VA		
	ZDC* Zone/Dim/ Color	[blank] ZDC with 184 Lumens* 9.1W/11.0VA		

**ORDERING EXAMPLE:** ▶ M-PJ-ZDC-FB = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup>Includes 30" (750 mm) length of 3/4" (19 mm) conduit

### Dimensions

Height: 22.1" (561 mm)  
Width: 2.8" (71 mm)  
Depth: 7.4" (187 mm)  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code
Deck Mount	M-PJ-DM-XX**



## M-PK DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
M-PK <sup>◊</sup>	[blank] Zone	1LED 68 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG**
	ZD Zone/Dim	3LED 152 Lumens* 4.2W/4.5VA	e (CE)	FW** AL** SV**
	ZDC* Zone/Dim/ Color	[blank] ZDC with 110 Lumens* 6.0W/7.2VA		

**ORDERING EXAMPLE:** ▶ M-PK-ZDC-FB = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup>Includes 30" (750 mm) length of 1" (25 mm) conduit

### Dimensions

Height: 22.5" (572 mm)  
Width: 2.2" (56 mm)  
Depth: 7.4" (187 mm)  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code
Deck Mount	M-PL-DM-XX**



### Powder Coat: Standard



### Powder Coat: Specialty



† Non-returned ◊ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## M-PZ DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
M-PZ <sup>◊</sup>	[blank] Zone	1LED 43 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG**
	ZD Zone/Dim	3LED 113 Lumens* 4.2W/4.5VA	e (CE)	FW** AL** SV**
	ZDC* Zone/Dim/ Color	[blank] ZDC with 60 Lumens* 6.0W/7.2VA		

**ORDERING EXAMPLE:** ▶ M-PL-ZDC-FB = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup> Includes 30" (750 mm) length of 1" (25 mm) conduit

### Dimensions

Height: 22.1" (561 mm)  
Width: 2.5" (64 mm)  
Depth: 7.4" (187 mm)  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code
Deck Mount	M-PZ-DM-XX**



## M-PL DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
M-PL <sup>◊</sup>	[blank] Zone	1LED 72 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG**
	ZD Zone/Dim		e (CE)	FW** AL** SV**
	ZDC* Zone/Dim/ Color	[blank] ZDC with 36 Lumens* 3.6W/4.3VA		

**ORDERING EXAMPLE:** ▶ M-PL-ZDC-FB = FIXTURE-LUXOR OPTION-FINISH

<sup>◊</sup> Includes 30" (750 mm) length of 1" (25 mm) conduit

### Dimensions

Height: 21.3" (541 mm)  
Width: 2.2" (55 mm)  
Depth: 7.4" (187 mm)  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code
Deck Mount	M-PL-DM-XX**




Powder Coat: Standard



Powder Coat: Specialty



<sup>†</sup> Non-returnable <sup>◊</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens

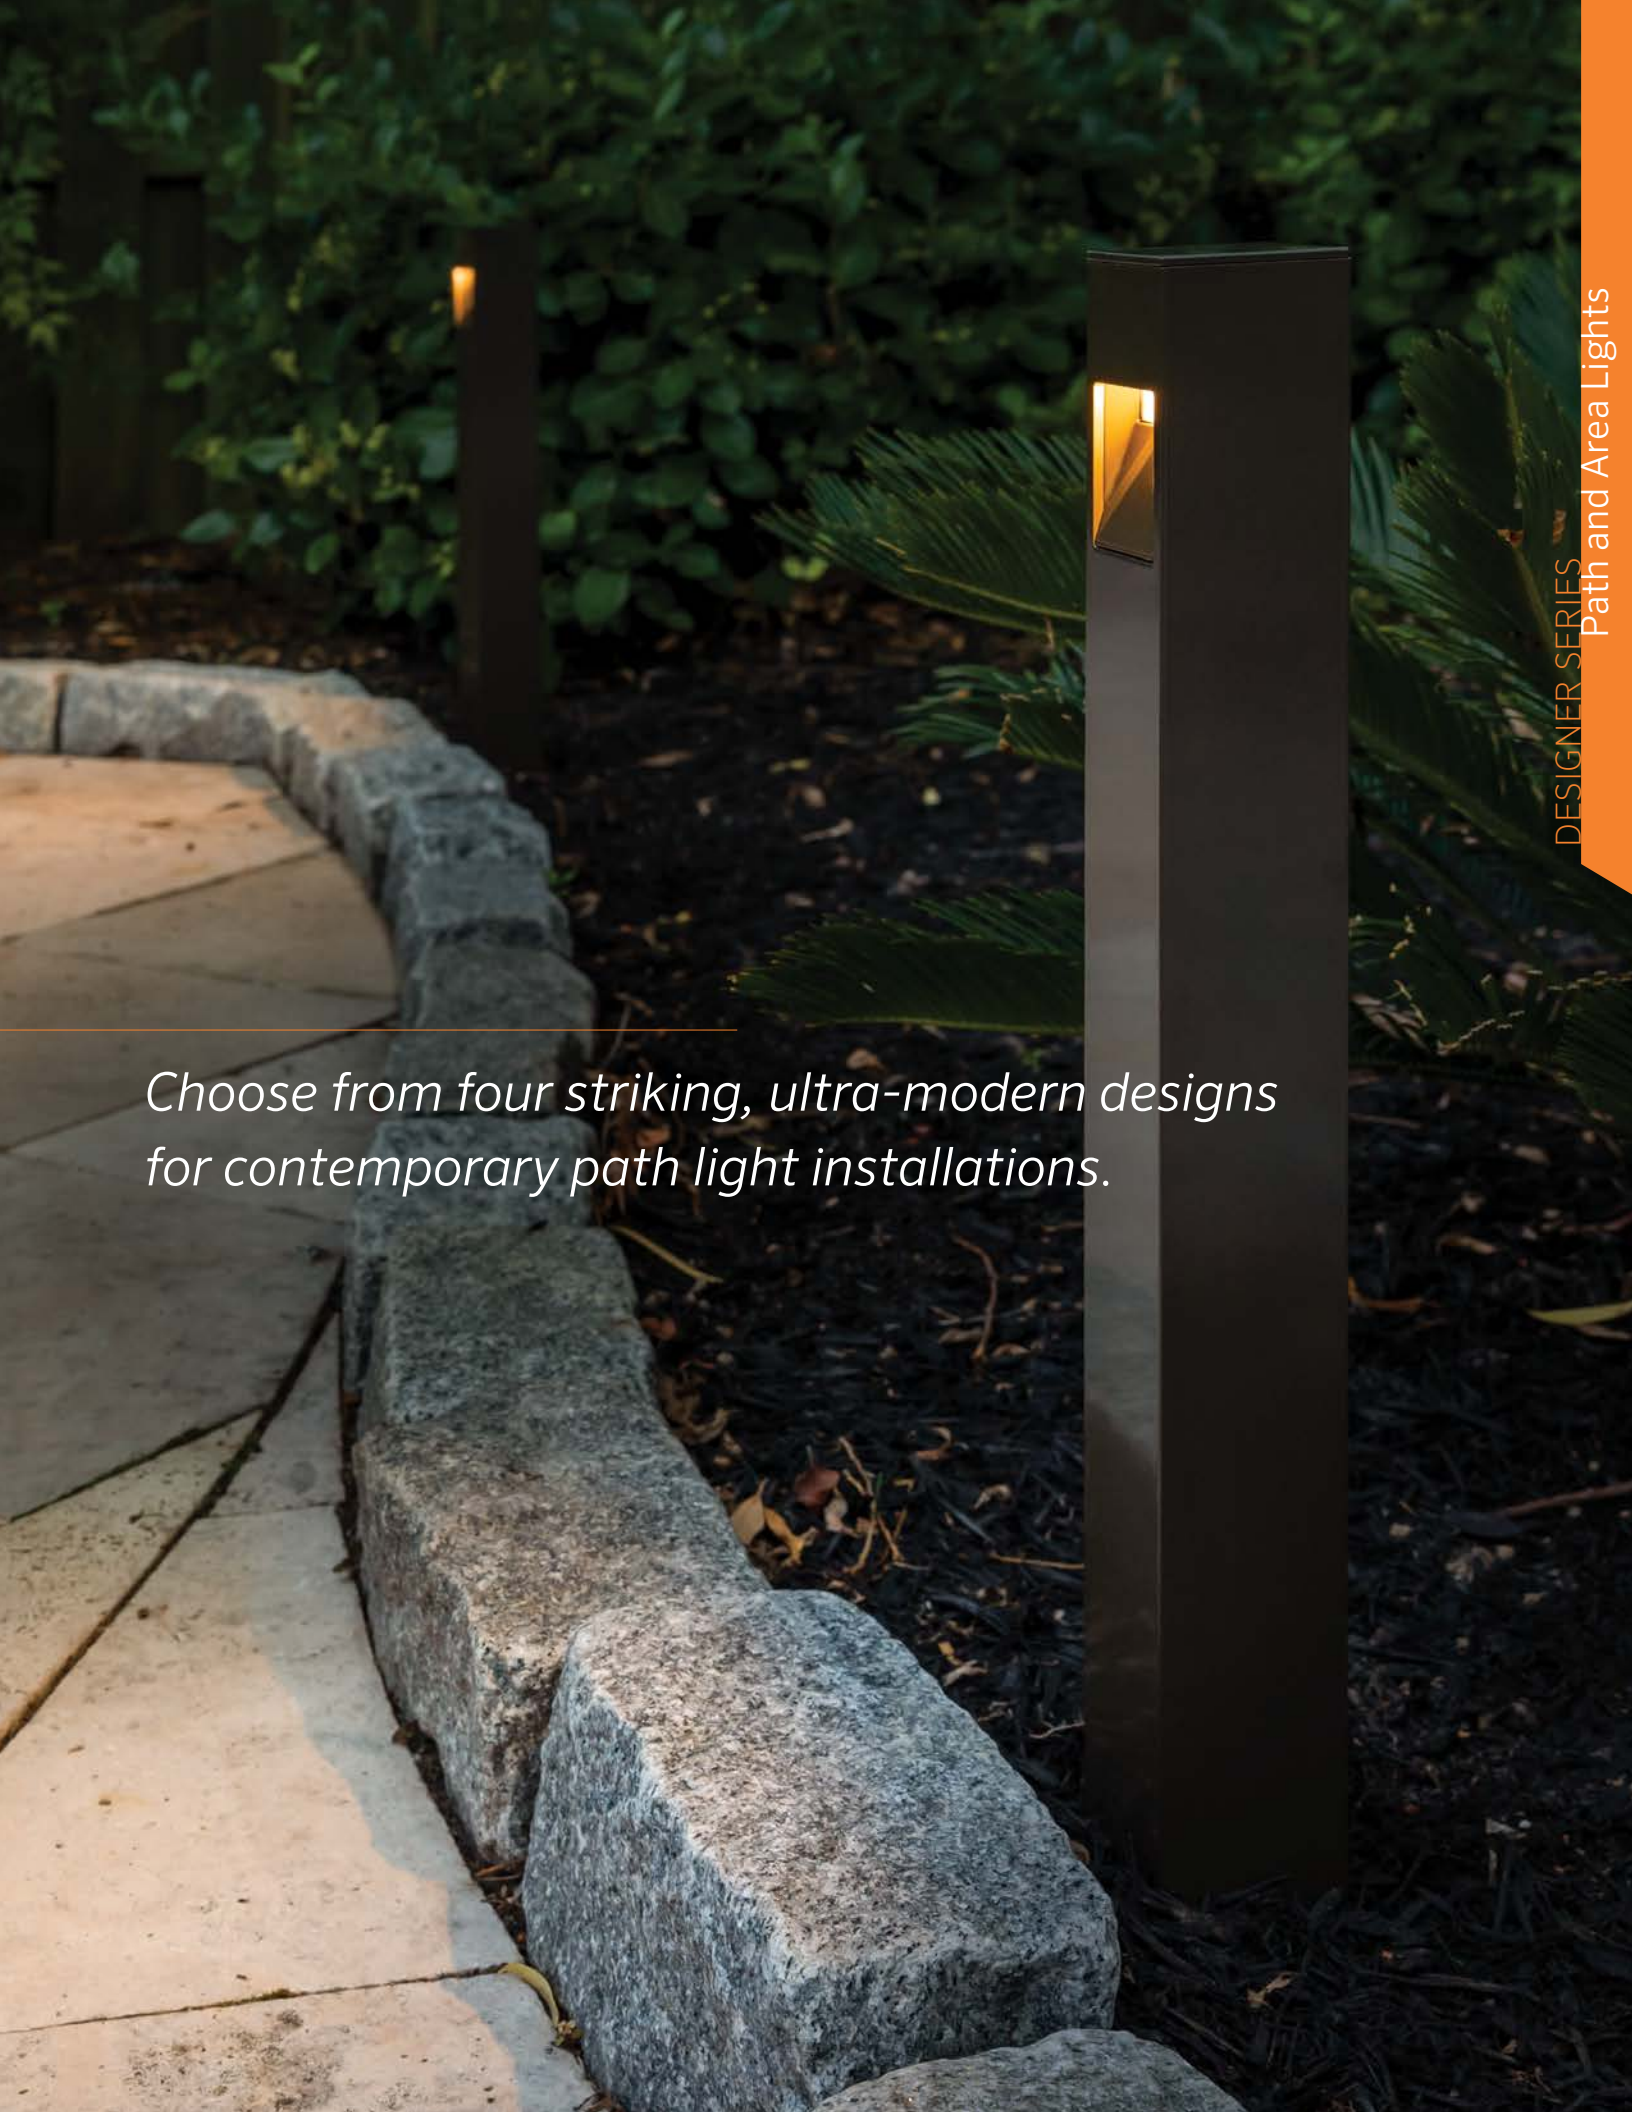

*Choose from four striking, ultra-modern designs for contemporary path light installations.*

# DESIGNER SERIES

## Wall Lights



---


*Ideal for new or retrofit* applications, FX Luminaire wall lights are available in a variety of recessed and surface-mounted options for maximum design flexibility.

*Use wall lights to enhance outdoor living spaces, accent architectural features, and create safe walking paths.*





RECESSED AND SURFACE-MOUNTED WALL LIGHTS

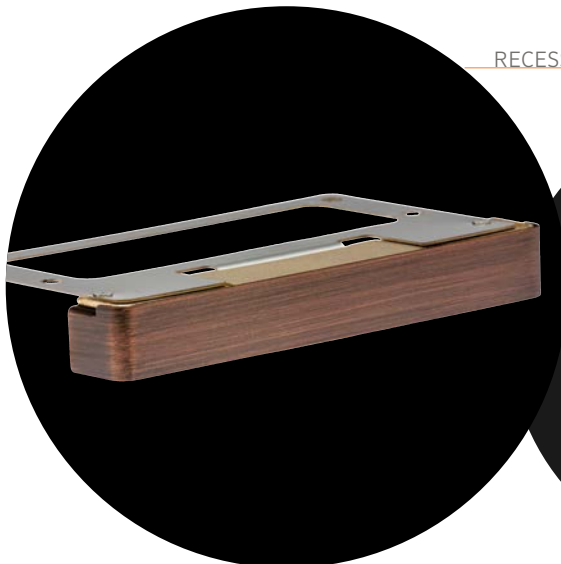

Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



Indicates certified wildlife-friendly products



Signifies ETL listed products

## LF DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Color Temperature	Compliance	Finish
LF	[blank] Zone	1LED 75 Lumens* 2.0W/2.4VA	W Warm 2,700K	[blank] (UL)	BZ DG WI SB FB WG** FW** AL** SV** CU BS SS CU-AB* CU-AT* BS-AB* BS-AT*
	ZD Zone/Dim		C Cool 3,900K	e (CE)	
	ZDC* Zone/Dim/Color	[blank] 34 Lumens* 3.6W/4.3VA	[blank]		

ORDERING EXAMPLE: ▶ LF-ZD-1LED-W-BZ = FIXTURE-LUXOR OPTION-LED-FINISH

◊ Includes Mounting Plate (755300)



### Dimensions

Height: 0.9" (22 mm)  
 Length: 6.5" (165 mm)  
 Depth: 1.0" (25 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum or Brass  
 Bracket: Stainless Steel

## MS DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
MS	[blank] Zone	1LED 50 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG** FW** AL** SV** BS AB* AT* NP**
	ZD Zone/Dim		e (CE)	

ORDERING EXAMPLE: ▶ MS-ZD-1LED-BS = FIXTURE-LUXOR OPTION-LED-FINISH



### Dimensions

Diameter: 3.7" (93 mm)  
 Depth: 2.0" (51 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum or Brass

### Powder Coat: Standard



### Powder Coat: Specialty



### Metal: Copper



### Metal: Brass



### Metal



† Non-returnable ✦ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

# HS DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Color Temperature	Compliance	Finish
HS	[blank] Zone	2LED 100 Lumens* 3.5W/3.8VA	W Warm 2,700K	[blank] (UL)	BZ DG WI SB FB WG** FW** AL** SV**
	ZD Zone/Dim		C Cool 3,900K	e (CE)	
	ZDC <sup>†</sup> Zone/ Dim/Color	[blank] 165 Lumens* 8.1W/8.6VA	[blank]		

ORDERING EXAMPLE: ▶ HS-ZD-2LED-W-FB = FIXTURE-LUXOR OPTION-LED-FINISH




## Dimensions

Height: 2.3" (58 mm)  
 Width: 8" (203 mm)  
 Depth: 0.9" (23 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum

## Powder Coat: Standard




## Powder Coat: Specialty



† Non-returnable ♦ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code †† Total delivered lumens

**LM** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
LM <sup>o</sup>	[blank] Zone	2LED 14 Lumens* 4.0W/4.8VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† CU AB* AT* NP*†
	ZD Zone/Dim		

**ORDERING EXAMPLE:** ▶ LM-2LED-CU = FIXTURE-LED-FINISH

<sup>o</sup> Includes Sleeve with Cover (250022030000)

**Dimensions**

Height: 3.5" (89 mm)  
 Width: 9.1" (231 mm)  
 Depth: 4.3" (109 mm)  
 Exposed Depth: 0.5" (13 mm)  
 Lead: 10' (3 m)  
 Material: Copper

ACCESSORIES: Specify Separately

Name	Code
Wall Light Connection Kit	EKITWALL



**CP** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
CP <sup>o</sup>	[blank] Zone	1LED 4 Lumens* 2.0W/2.4VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† CU AB* AT* NP*†
	ZD Zone/Dim		

**ORDERING EXAMPLE:** ▶ CP-1LED-CU = FIXTURE-LED-FINISH

<sup>o</sup> Includes Sleeve with Cover (250022040000)

**Dimensions**

Height: 3.5" (89 mm)  
 Width: 5.0" (127 mm)  
 Depth: 4.3" (109 mm)  
 Exposed Depth: 0.5" (13 mm)  
 Lead: 10' (3 m)  
 Material: Copper

ACCESSORIES: Specify Separately


Name	Code
Wall Light Connection Kit	EKITWALL



Powder Coat: Standard



Powder Coat: Specialty



Metal



† Non-returnable ✦ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

**PD** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
PD <sup>o</sup>	[blank] Zone	2LED 26 Lumens* 4.0W/4.8VA	BZ DG WI FB SB WG** FW** AL** SV** BS AB* AT* NP** CB DT
	ZD Zone/Dim		

**ORDERING EXAMPLE:** ▶ PD-2LED-CB = FIXTURE-LED-FINISH

<sup>o</sup> Includes Sleeve with Cover (250022030000)

**Dimensions**  
 Height: 3.5" (89 mm)  
 Width: 9.0" (229 mm)  
 Depth: 4.4" (112 mm)  
 Exposed Depth: 1.1" (28 mm)  
 Lead: 10' (3 m)  
 Material: Brass or Composite

ACCESSORIES: Specify Separately

Name	Code
Wall Light Connection Kit	EKITWALL



**UN** DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
UN <sup>o</sup>	[blank] Zone	1LED 11 Lumens* 2.0W/2.4VA	BZ DG WI FB SB SV WG** FW** AL** SV** BS AB* AT* NP** CB DT
	ZD Zone/Dim		

**ORDERING EXAMPLE:** ▶ UN-1LED-CB = FIXTURE-LED-FINISH

<sup>o</sup> Includes Sleeve with Cover (250022040000)

**Dimensions**  
 Height: 3.6" (91 mm)  
 Width: 5.2" (132 mm)  
 Depth: 4.4" (112 mm)  
 Exposed Depth: 1.1" (28 mm)  
 Lead: 10' (3 m)  
 Material: Brass or Composite

ACCESSORIES: Specify Separately


Name	Code
Wall Light Connection Kit	EKITWALL




Powder Coat: Standard



Powder Coat: Specialty



Composite



Metal: Brass



**PO DESIGNER PREMIUM**



Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
PO <sup>◊</sup>	[blank] Zone	1LED 4-39 Lumens* 2.0W/2.4VA	RD Round	BZ DG WI FB SB WG** FW** AL** SV** BS AB* AT* NP**
	ZD Zone/Dim		SQ Square	
			ST Spot	
			WW Wall Wash	

**ORDERING EXAMPLE:** ▶ PO-1LED-ST-FB = FIXTURE-LED-FACEPLATE-FINISH

◊ Includes 1.5" Conduit Sleeve (250018590000)

**Dimensions**

Height: 2.5" (64 mm)  
 Diameter: 1.5" (41 mm) conduit  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
PO Mounting Bracket	POBRKT	Standard Optics Kit	1LEDOPTICKIT	Wall Light Connection Kit	EKITWALL



**VO DESIGNER PREMIUM**



Fixture	Luxor Option	LED Configuration	Finish
VO <sup>◊</sup>	ZD Zone/Dim	1LED 178 Lumens* 2.0W/2.4VA	SS

**ORDERING EXAMPLE:** ▶ VO-ZD-1LED-SS = FIXTURE-LUXOR-LED-FINISH

◊ Includes Conduit Sleeve

**Dimensions**

Height: 2.3" (58 mm)  
 Diameter: 1.9" (48 mm)  
 Lead: 10' (3 m)  
 Material: Stainless Steel

ACCESSORIES: Specify Separately


Name	Code
VO, Ground Mount Kit	VOKITGRD




**Powder Coat: Standard**



**Powder Coat: Specialty**



**Metal**



† Non-returnable ◊ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## MO DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
MO <sup>◇</sup>	[blank] Zone	1LED 13-68 Lumens* 2.0W/2.4VA	RD Round	BZ DG WI FB SB WG** FW** AL** SV** BS AB* AT* NP**
	ZD Zone/Dim	3LED 33-169 Lumens* 4.2W/4.5VA	SQ Square	
	ZDC <sup>◇</sup> Zone/Dim/ Color	[blank] ZDC with 61 Lumens* 6.0W/7.2VA	ST Spot	
			WW Wall Wash	

ORDERING EXAMPLE: ▶ **MO-3LED-ST-FB** = FIXTURE-LED-FACEPLATE-FINISH

<sup>◇</sup> Includes 2.0" Conduit Sleeve (250020600000)

### Dimensions


Height: 3.3" (84 mm)  
Diameter: 2.0" (51 mm) conduit  
Lead: 10' (3 m)  
Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
MO Mounting Bracket	MOBRKT	Standard Optics Kit	ΔLEDOPTICKIT	Wall Light Connection Kit	EKITWALL



## SL DESIGNER PREMIUM

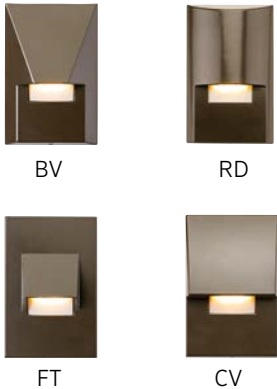

Fixture	Luxor Option	LED Configuration	Shroud Option	Finish
SL	[blank] Zone	1LED 48 Lumens* 2.0W/2.4VA	BV Bevel	BZ DG WI SB FB WG** FW** AL** SV**
	ZD Zone/Dim	3LED 78 Lumens* 4.2W/4.5VA	RD Round	
	ZDC <sup>◇</sup> Zone/Dim/ Color	[blank] 60 Lumens* 6.0W/7.2VA	FT Flat	
			CV Curve	

ORDERING EXAMPLE: ▶ **SL-ZD-3LED-BZ** = FIXTURE-LUXOR OPTION-LED-FINISH

### Dimensions

Height: 4.9" (124 mm)  
Diameter: 3.2" (81 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code
1-Gang Junction Box, New Work	JB1GNWNM	Step-Down Transformer, 120V to 12V, 60W	ST120DIM



Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable <sup>◇</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code <sup>\*</sup> Total delivered lumens



PENDANT AND DIRECTIONAL DOWN LIGHTS



Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



Indicates certified wildlife-friendly products



Signifies ETL listed products





# DESIGNER SERIES

## Down Lights

*Built with you in mind*, FX Luminaire down lights offer unrivaled optical flexibility and limitless design potential. Use the fixtures to mimic the effects of natural moonlight in any outdoor installation.

*Choose from classic or contemporary design elements and an array of junction boxes and wall plates to bring your vision to life.*



## ZW DESIGNER PLUS

Fixture	Luxor Option	LED Configuration	Direction	Finish
ZW	[Blank] Zone	1LED 48 Lumens* 2.0W/2.4VA	DN Down Only	BZ WI FB CU DG SS
	ZD Zone/Dim	3LED 78 Lumens* 4.0W/4.5VA	UD Up & Down	WG*† FW*† AL*† SV*† CU SS
	ZDC* Zone/Dim/Color	[blank] 60 Lumens* 6.0W/7.2VA		

ORDERING EXAMPLE: ▶ ZW-ZD-3LED-DN-BZ = FIXTURE-LUXOR-LED-DIRECTION-FINISH



### Dimensions

Height: 3.9" (99 mm) to 10.3" (262 mm)  
 Diameter: 2.1" (53 mm) or 2.3" (58 mm)  
 Base Diameter: 4.7" (119 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum, Stainless Steel, or Copper



## ZC DESIGNER PLUS

Fixture	Luxor Option	LED Configuration	Finish
ZC	[Blank] Zone	1LED 48 Lumens* 2.0W/2.4VA	BZ WI FB DG WG*† FW*† AL*† SV*† CU SS
	ZD Zone/Dim	3LED 72 Lumens* 4.2W/4.5VA	
	ZDC* Zone/Dim/Color	[blank] 60 Lumens* 6.0W/7.2VA	

ORDERING EXAMPLE: ▶ ZC-ZD-3LED-FW = FIXTURE-LUXOR-LED-FINISH




### Dimensions

Height: 5.5" (140 mm)  
 Diameter: 2.1" (53 mm)  
 Base Diameter: 4.7" (119 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum or Copper


Powder Coat: Standard



Powder Coat: Specialty



Metal



† Non-returnable ♦ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## SD DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Finish
SD <sup>◊</sup>	[blank] Zone	3LED 202 Lumens* 4.2W/4.5VA	BZ DG WI SB FB WG** FW** AL** SV**
	ZD Zone/Dim	6LED 367 Lumens* 8.2W/9.7VA	
		9LED 398 Lumens* 10.0W/10.7VA	
	ZDC <sup>◊</sup> Zone/Dim/ Color	[blank] ZDC with 174 Lumens* 9.1W/11.0VA	

ORDERING EXAMPLE: ▶ SD-ZD-3LED-FB = FIXTURE-LUXOR OPTION-FINISH

◊ Includes Mounting Plate (250027760000)

### Dimensions

Height: 6.9" (175 mm)  
Depth: 4.0" (102 mm)  
Base Diameter: 5.3" (135 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code
Solite Spread (MR-16)	250015240000	Flood Lens	Δ-LEDFLENS
Hex Baffle (MR-16)	250015260000	Wide Flood Lens	Δ-LEDWFLENS



## RC DESIGNER PLUS



4" Retrofit Housing

Fixture	Luxor Option	LED Configuration	Finish
RC	[blank] Zone	1LED 85 Lumens* 2.0W/2.4VA	BZ DG WI SB FB WG* FW** AL** SV**
	ZD Zone/Dim	3LED 261 Lumens* 4.2W/4.5VA	
		6LED 413 Lumens* 8.2W/9.7VA	
		9LED 722 Lumens* 10.0W/10.7VA	
	ZDC <sup>◊</sup> Zone/Dim/ Color	[blank] 178 Lumens* 9.1W/11.0VA	

ORDERING EXAMPLE: ▶ RC-3LED-FW = FIXTURE-LED-FINISH

### Dimensions

Height: 3.5" (89 mm)  
Diameter: 5.5" (140 mm)  
Exposed Depth: 0.1" (3 mm)  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Hex Baffle (MR-16)	250015260000	Flood Lens	Δ-LEDFLENS	4" (102 mm) Recessed Down Light Housing (Qty: 6)	CANR4RICAT
Solite Spread (MR-16)	250015240000	Wide Flood Lens	Δ-LEDWFLENS	Step-Down Transformer (12V), Universal Input Voltage (120V-233V)	ST-UV
				Step-Down Transformer, Dimmable (120V- 12V, 60W)	ST-120-DIM



Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable ◊ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## QT DESIGNER



Fixture	Luxor Option	LED Configuration	Options	Finish
QT	[blank] Zone	1LED 79 Lumens* 2.0W/2.4VA	[blank]° Mini-Mount	BZ DG WI SB FB WG** FW** AL** SV**
	ZD Zone/ Dim		WM°° Wall Mount	

**ORDERING EXAMPLE:** ▶ QT-ZD-1LED-FB = FIXTURE-LUXOR OPTION-LED-FINISH

° Includes Mini-Mount (MM-050-XX) °° Includes Wall Mount (WM-XX\*\*)

### Dimensions

Length: 6.8" (173 mm)  
Diameter: 2.1" (53 mm)  
Lead: 26' (8 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-050-XX**	Straight Coupling	COUP-XX**	Hex Baffle (MR-16)	250015260000
TreeBox	TB-XX**	90° Elbow Fitting	ELBW-050-XX**	Flood Lens	1-LEDFLENS
Straight Riser	YY-R-XX**	T-Mount Fitting	TMNT-050-XX**	Wide Flood Lens	1-LEDWFLENS



## JB DESIGNER PLUS



e Version



Mini-Mount

Fixture	Luxor Option	LED Configuration	Compliance	Shroud Options	Mount Option	Finish
JB	[blank] Zone	1LED 73 Lumens* 2.0W/2.4VA	[blank]° (UL)	[blank]° 60° Angled	[blank]° Mini-Mount	BZ DG WI
	ZD Zone/ Dim	3LED 177 Lumens* 4.2W/4.5VA	e (CE)	SS 3" (76 mm) Straight	WM°° Wall Mount	SB FB WG** FW** AL** SV**
	ZDC* Zone/ Dim/ Color	[blank] ZDC with 69 Lumens* 6.0W/7.2VA			[blank] Bracket Mount (e Only)	

**ORDERING EXAMPLE:** ▶ JB-1LED-FB = FIXTURE-LED-FINISH

° Includes Mini-Mount (MM-050-XX) °° Includes Wall Mount (WM-XX\*\*)

### Dimensions

Length: 10.4" (264 mm)  
Diameter: 2.6" (66 mm)  
Lead: 26' (8 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
TreeBox	TB-XX**	90° Elbow Fitting	ELBW-050-XX**	Hex Baffle (MR-11)	250015250000
Mini J-Box	MJ-050-XX**	T-Mount Fitting	TMNT-050-XX**	Solite Spread (MR-11)	250015420000
Straight Coupling	COUP-XX**	Wall Plate, 1-Gang	WP-1G-050-XX**	Flood Lens	Δ-LEDFLENS
Straight Riser	YY-R-XX**	Wall Plate, Round	WP-RD-050-XX**	Wide Flood Lens	Δ-LEDWFLENS



Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable \* Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## DE DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Shroud Option	Mount Option	Finish
DE	[blank] Zone	3LED 162 Lumens* 4.2W/4.5VA	[blank]° (UL)	[blank]° 60° Angled	[blank]° Mini-Mount	BZ DG WI SB FB WG* FW* AL* SV*
	ZD Zone/ Dim	6LED 328 Lumens* 8.2W/9.7VA	e (CE)	SS 4" (102 mm) Straight	[blank] Bracket Mount (e Only)	
		9LED 344 Lumens* 10.0W/10.7VA			WM°° Wall Mount	
	ZDC* Zone/ Dim/ Color	[blank] ZDC with 93 Lumens* 9.1W/11.0VA				

ORDERING EXAMPLE: ▶ DE-3LED-FB = FIXTURE-LED-FINISH

° Includes Mini-Mount (MM-050-XX) °° Includes Mini-Mount (WM-XX\*\*)

### Dimensions

Length: 11.7" (297 mm)  
Diameter: 3.0" (76 mm)  
Lead: 26' (8 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Hex Baffle (MR-16)	250015260000
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	Flood Lens	Δ-LEDFLENS
SJ-Box	SJ-XX**	ProAim Ratcheting Spike	PARS	Wide Flood Lens	Δ-LEDWFLENS



### Powder Coat: Standard



### Powder Coat: Specialty



† Non-returnable ♦ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## LE DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Compliance	Finish
LE <sup>◊</sup>	[blank] Zone	1LED 44 Lumens* 2.0W/2.4VA	[blank] (UL)	BZ DG WI SB FB WG** FW** AL** SV** CU AB* AT* NP**
	ZD Zone/ Dim		e (CE)	

ORDERING EXAMPLE: ▶ LE-1LED-BZ = FIXTURE-LED-FINISH

◊ Includes Lock (2500182200000) and Cable (250021830000)



### Dimensions

Height: 3.1" (79 mm)  
Diameter: 1.6" (41 mm)  
Lead: 26' (8 m)  
Material: Aluminum or  
Copper/Brass

## VE DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Compliance	Perforated Option	Finish
VE <sup>◊</sup>	[blank] Zone	1LED 90 Lumens* 2.0W/2.4VA	[blank] (UL)	[blank] Standard	BZ DG WI FB SB WG** FW** AL** SV** CU AB* AT* NP*
	ZD Zone/ Dim	3LED 209 Lumens* 4.2W/4.5VA	e (CE)	PS Perforated Sleeve	
	ZDC <sup>†</sup> Zone/ Dim/ Color	[blank] ZDC with 130 Lumens* 6.0W/7.2VA			

ORDERING EXAMPLE: ▶ VE-ZDC-PS-CU = FIXTURE-LUXOR OPTION-PERFORATED OPTION-FINISH

◊ Includes Lock (2500182200000) and Cable (250021830000)




### Dimensions

Height: 4.3" (109 mm)  
Diameter: 2.3" (58 mm)  
Lead: 26' (8 m)  
Material: Aluminum or  
Copper/Brass

### Powder Coat: Standard



### Powder Coat: Specialty



### Metal: Copper



### Metal: Brass



† Non-returnable ◊ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## PS DESIGNER PLUS



Fixture	Luxor Option	LED Configuration	Mount Option	Finish
PS	[blank] Zone	1LED 85 Lumens* 2.0W/2.4VA	[blank] <sup>o</sup> Standard Hardware	BZ DG WI FB SB WG** FW** AL** SV**
	ZD Zone/Dim	3LED 246 Lumens* 4.2W/4.5VA	HB <sup>oo</sup> Hanging Bracket (Powder Coat Only)	BS NP** CU BS-AB* BS-AT* CU-AB* CU-AT*
		6LED 395 Lumens* 8.2W/9.7VA		
		9LED 570 Lumens* 10.0W/10.7VA		
	ZDC <sup>o</sup> Zone/Dim/Color	[blank] ZDC with 129 Lumens* 9.1W/11.0VA		

**ORDERING EXAMPLE:** ▶ PS-ZD-6LED-CU = FIXTURE-LUXOR OPTION-LED-FINISH

<sup>o</sup>Includes Housing Bracket (250016640000) and Mounting Bracket (250016650000)

<sup>oo</sup>Includes Lock (250021820000) and Cable (250021830000)

ACCESSORIES: Specify Separately

### Dimensions

Height: 3.0" (76 mm)  
 Diameter: 4.2" (107 mm)  
 Lead: 10' (3 m)  
 Material: Brass or Aluminum

Name	Code	Name	Code	Name	Code
Wall Plate, PS	WP-RD-PS-XX	Flood Lens	Δ-LEDFFLENS	Hex Baffle (MR-16)	250015260000
CE Kit	WP-RD-PS-E-XX	Wide Flood Lens	Δ-LEDWFLENS	Solite Spread (MR-16)	250015240000



## NL DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
NL <sup>o</sup>	[blank] Zone	1LED 85 Lumens* 2.0W/2.4VA	BZ DG WI FB SB WG** FW** AL** SV**
	ZD Zone/Dim	3LED 246 Lumens* 4.2W/4.5VA	BS NP** CU BS-AB* BS-AT* CU-AB* CU-AT*
		6LED 395 Lumens* 8.2W/9.7VA	
		9LED 570 Lumens* 10.0W/10.7VA	
	ZDC <sup>o</sup> Zone/Dim/Color	[blank] ZDC with 129 Lumens* 9.1W/11.0VA	

**ORDERING EXAMPLE:** ▶ NL-3LED-CU-AB = FIXTURE-LED-FINISH

<sup>o</sup>Includes Housing Bracket (250016730000) and Mounting Bracket (250016740000)

ACCESSORIES: Specify Separately

### Dimensions

Height: 3.1" (80 mm)  
 Width: 3.2" (81 mm)  
 Depth: 3.4" (86 mm)  
 Lead: 10' (3 m)  
 Material: Brass or Aluminum


Name	Code	Name	Code	Name	Code
Wall Plate, NL	WP-2G-NL-XX	Flood Lens	Δ-LEDFFLENS	Hex Baffle (MR-16)	250015260000
CE Kit	WP-2G-NL-E-XX	Wide Flood Lens	Δ-LEDWFLENS	Solite Spread (MR-16)	250015240000




Powder Coat: Standard



Powder Coat: Specialty



Metal: Copper/Brass



† Non-returnable \* Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## QL DESIGNER



Fixture	Luxor Option	LED Configuration	Compliance	Finish
QL <sup>◊</sup>	[blank] Zone	1LED 53 Lumens*	[blank] (UL)	BZ DG WI SB FB WG** FW** AL** SV**
	ZD Zone/ Dim		e (CE)	

ORDERING EXAMPLE: ▶ QL-ZD-1LED-FB = FIXTURE-LED-FINISH

◊ Includes Mounting Bracket (250029320000)



### Dimensions

Height: 2.3" (58 mm)  
 Width: 1.5" (38 mm)  
 Depth: 2.2" (56 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum



## VC DESIGNER PLUS

Fixture	Luxor Option	LED Configuration	Finish
VC <sup>◊</sup>	ZD Zone/Dim	1LED 156 Lumens* 2.0W/2.4VA	FW

ORDERING EXAMPLE: ▶ VC-ZD-1LED-FW = FIXTURE-LUXOR-LED-FINISH

◊ Includes Mounting Bracket




### Dimensions

Height: 3.3" (83 mm)  
 Diameter: 2.4" (62 mm)  
 Lead: 10' (3 m)  
 Material: Aluminum

### Powder Coat: Standard



### Powder Coat: Specialty




† Non-returnable ◊ Fixtures specified with ZDC Technology® are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens




*Down lights subtly enhance architecture while creating the illusion of additional space.*



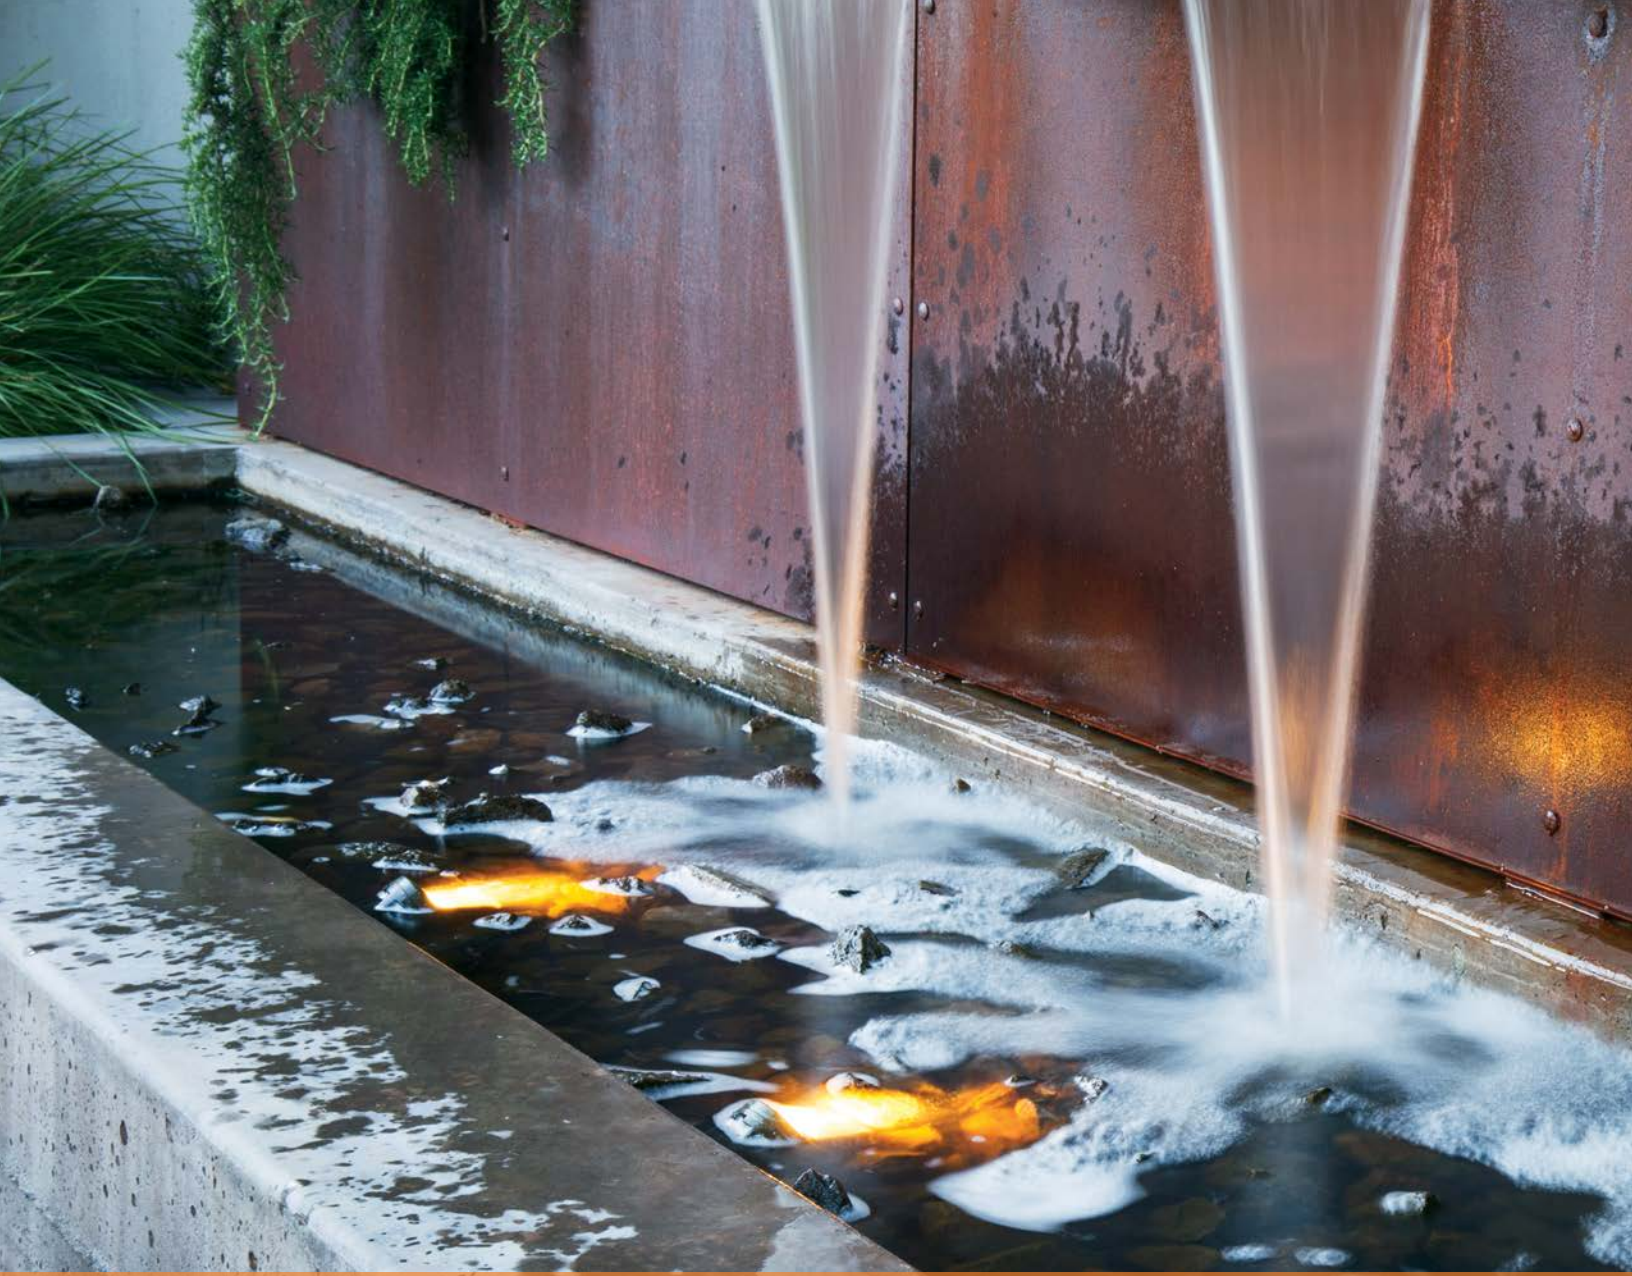

WELL LIGHTS AND UNDERWATER LIGHTS

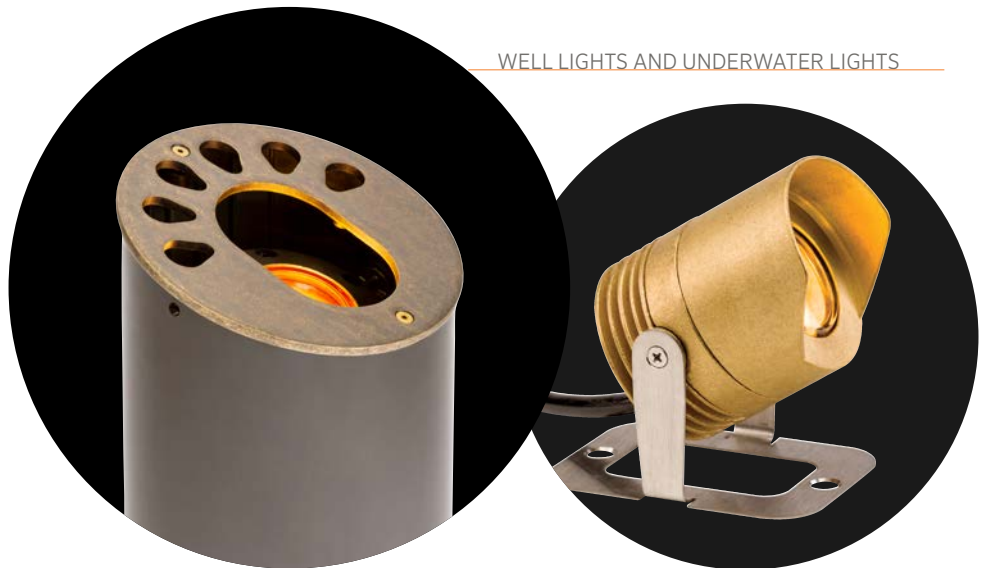



# DESIGNER SERIES

## Specialty Lights



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



Indicates certified wildlife-friendly products

---

*Engineered to provide* versatile, high-efficiency solutions for niche applications and specialized effects, specialty lights open a range of new opportunities for creative lighting design.

*From water features and sculptures to boulders and barbecues, statement pieces are meant to shine. Choose the specialty light that's right for you.*

## KG DESIGNER PREMIUM



CB (Grid)



Fixture	Luxor Option	LED Configuration	Compliance	Finish
KG <sup>◊</sup>	[blank] Zone	3LED 127 Lumens* 4.2W/4.5VA	[blank] (UL)	BZ DG WI FB SB WG** FW** AL** SV** BS AB* AT* NP**
	ZD Zone/ Dim	6LED 265 Lumens* 8.2W/9.7VA	e (CE)	CB (Grid)
		9LED 322 Lumens* 10.0W/10.7VA		
	ZDC <sup>†</sup> Zone/ Dim/ Color	[blank] ZDC with 123 Lumens* 9.1W/11.0VA		

**ORDERING EXAMPLE:** ▶ **KG-9LED-BS** = FIXTURE-LED-FINISH

<sup>◊</sup> Includes 6.0" (152 mm) Reversible (Flat/Angled) Conduit Sleeve (250011630000)

### Dimensions

Height: 9.0" (229 mm)  
Diameter: 6.0" (152 mm)  
Lead: 10' (3 m)  
Material: Brass, Aluminum,  
or Composite



## FC DESIGNER PREMIUM

Ring (RG)



Cowling (CW)



Wash (GW)



Louder (LV)

Fixture	Luxor Option	LED Configuration	Compliance	Style Option	Finish
FC <sup>◊</sup>	[blank] Zone	1LED 20-79 Lumens* 2.0W/2.4VA	[blank] (UL)	RG Ring	BZ DG WI FB
	ZD Zone/ Dim	3LED 83-185 Lumens* 4.2W/4.5VA	e (CE)	LV Louver	SB WG** FW** AL**
		6LED 123-334 Lumens* 8.2W/9.7VA		CW Cowling	SV** BS AB* AT* NP**
		9LED 170-419 Lumens* 10.0W/10.7VA		GW-90 Ground Wash 90°	
	ZDC <sup>†</sup> Zone/ Dim/ Color	[blank] ZDC with 216 Lumens* 9.1W/ 11.0VA		GW-180 Ground Wash 180°	
				GW-270 Ground Wash 270°	
				GW-360 Ground Wash 360°	

**ORDERING EXAMPLE:** ▶ **FC-9LED-LV-BS** = FIXTURE-LED-STYLE OPTION-FINISH

<sup>◊</sup> Includes Construction Sleeve (250014260000)

### Dimensions


Height: 4.8" (122mm)  
Diameter: 4.0" (102 mm)  
Lead: 10' (3 m)  
Material: Brass



Powder Coat: Standard



Powder Coat: Specialty



Metal: Brass



Composite



<sup>†</sup> Non-returnable <sup>◊</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens

## HP-48 DESIGNER PLUS



Fixture	Size	Luxor Option	LED Configuration	Color Temp.	Compliance	Finish
HP <sup>o</sup>	48 4" x 8" (102 mm x 203 mm)	[blank] Zone	1LED 17 Lumens* 2.0W/2.4VA	W Warm (2,700K)	[Blank] UL	DS
		ZD Zone/Dim		C Cool (3,900K)	e CE	
		ZDC <sup>+</sup> Zone/Dim/Color	[blank] ZDC 28 Lumens* 3.6 W/4.3VA	[Blank]		

ORDERING EXAMPLE: ▶ HP48-1LED-W-DS = FIXTURE-LUXOR-LED-FINISH

<sup>o</sup>Includes Sleeve (250027880000)  
ACCESSORIES: Specify Separately



### Dimensions

Height: 3.1" (79 mm)  
Width: 4.0" (102 mm)  
Length: 8" (203 mm)  
Lead: 10' (3 m)  
Material: Composite

Name	Code
Mounting Kit, HP-48	MKHP-48

## KT DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
KT	[Default] Zone	3LED 127 Lumens* 4.2W/4.5VA	SS
	ZD Zone/Dim		
	ZDC <sup>+</sup> Zone/Dim/Color	[blank] 168 Lumens* 6.0W/7.2VA	

ORDERING EXAMPLE: ▶ KT-ZD-3LED-SS = FIXTURE-LUXOR-LED-FINISH

### Dimensions

Height: 9.4" (240 mm)  
Diameter: 7.0" (178 mm)  
Lead: 10' (3 m)  
Material: Stainless Steel



## BQ DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Finish
BQ	[blank] Zone	1LED 82 Lumens* 2.0W/2.4VA	SS
	ZD Zone/Dim		

ORDERING EXAMPLE: ▶ BQ-1LED-SS = FIXTURE-LED-FINISH

### Dimensions


Arm Length: 24.0" (610 mm)  
Base Diameter: 3.6" (94 mm)  
Lead: 10' (3 m)  
Material: Stainless Steel

ACCESSORIES: Specify Separately

Name	Code
Mini Transformer, 6W	MT6W



Metal | Composite



† Non-returnable ✦ Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
\* May require longer lead time \*\* Finish code \* Total delivered lumens

## LP DESIGNER PREMIUM



Support Stand



Fixture	Luxor Option	LED Configuration	Compliance	Wire Lead	Finish
LP <sup>◊</sup>	[blank] Zone	1LED 74 Lumens* 2.0W/2.4VA	[blank] (UL)	[blank] 30' (9 m) Lead	BS
	ZD Zone/ Dim	3LED 173 Lumens* 4.2W/4.5VA	e (CE)	XL 100' (30 m) Lead	
	ZDC <sup>✦</sup> Zone/ Dim/ Color	[blank] ZDC with 147 Lumens* 6.0W/7.2VA			

ORDERING EXAMPLE: ▶ LP-ZDC-XL-BS = FIXTURE-LED-WIRE LEAD-FINISH

<sup>◊</sup> Includes Support Stand (250022480000)



### Dimensions

Height: 1.9" (48 mm)  
 Diameter: 2.7" (69 mm)  
 Support Stand Diameter:  
 4.0" (102 mm)  
 Material: Brass

## LL DESIGNER PREMIUM



Fixture	Luxor Option	LED Configuration	Compliance	Finish	Wire Lead
LL <sup>◊</sup>	[blank] Zone	3LED 127 Lumens* 4.2W/4.5VA	[blank] (UL)	BS	[blank] 30' (9 m) Lead
	ZD Zone/ Dim	6LED 265 Lumens* 8.2W/9.7VA	e (CE)	XL	100' (30 m) Lead
		9LED 322 Lumens* 10.0W/10.7VA			
	ZDC Zone/ Dim/ Color	[blank] ZDC with 123 Lumens* 9.1W/11.0VA			

ORDERING EXAMPLE: ▶ LL-ZDC-BS = FIXTURE-LED-FINISH

<sup>◊</sup> Includes Stainless Steel Stand (250025480000)




### Dimensions

Length: 4.0" (102 mm)  
 Diameter: 3.2" (81 mm)  
 Material: Brass

### Metal



<sup>†</sup> Non-returnable <sup>✦</sup> Fixtures specified with ZDC Technology<sup>®</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens

A photograph of a multi-tiered waterfall cascading over large, stacked rocks. The scene is set at dusk or dawn, with a soft blue sky and silhouettes of trees in the background. The water is illuminated from below by warm, golden-yellow underwater lights, creating a glowing effect on the rocks and the water's surface. The overall mood is serene and natural.

*Underwater fixtures bring the cascading streams and rocky crags of outdoor water features to life.*



SPOT LIGHT AND WALL WASH



# STANDARD SERIES

## Up Lights



*Use the warmth* of up lights to accent foliage, create visual interest, and highlight stonework or other architectural features.

*Choose from powder coated, brass, or copper finishes depending on environmental needs.*



RS-LED20WFL-BZ

Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance

## RS STANDARD



Long Shroud

Fixture	Lamp	Shroud Option	Finish
RS <sup>o</sup>	<b>LED20WFL</b> 261 Lumen Lamp 4.0W/4.3VA	<b>[blank]</b> 15° Angled Shroud	<b>BZ DG WI SB FB</b>
	<b>LED35WFL</b> 337 Lumen Lamp 5.0W/5.4VA	<b>LS</b> 45° Angled Long Shroud	
	<b>LED50WFL</b> 447 Lumen Lamp 6.0W/6.5VA		
	<b>ZD35WFL</b> 337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor <sup>®</sup>		
	<b>NL</b> No Lamp		

**ORDERING EXAMPLE:** ▶ **RS-LED20WFL-LS-BZ** = FIXTURE-LAMP-SHOULD OPTION-FINISH

<sup>o</sup>Includes Super Slot Spike (753900)

### Dimensions

Height: 6.6" (168 mm)  
 Diameter: 2.5" (64 mm)  
 Lamp: MR-16  
 Lead: 10' (3 m)  
 Material: Zinc

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Ground Mount	<b>GM-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	Hex Baffle (MR-16)	<b>250015260000</b>
SJ-Box	<b>SJ-XX**</b>	90° Elbow Fitting	<b>ELBW-050-XX**</b>	Frosted Lens (MR-16)	<b>250015170000</b>
Straight Riser	<b>YY-R-XX**</b>	T-Mount Fitting	<b>TMNT-050-XX**</b>	Solite Spread (MR-16)	<b>250015240000</b>



## MP STANDARD PLUS



Fixture	Lamp	Finish
MP <sup>o</sup>	<b>NL</b> No Lamp	<b>BZ DG WI FB SB WG*† FW*† AL*† SV*†</b>
	<b>LED203FL</b> 230 Lumens* 2.0W/3.1VA	

**ORDERING EXAMPLE:** ▶ **MP-LED203FL-DG** = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Super Slot Spike (753900)

### Dimensions

Height: 5.0" (127 mm)  
 Diameter: 1.7" (43 mm)  
 Lamp: MR-11  
 Lead: 10' (3 m)  
 Material: Zinc

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Mini J-Box	<b>MJ-050-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	Hex Baffle (MR-11)	<b>250015250000</b>
VersaBox	<b>VB-050-XX**</b>	90° Elbow Fitting	<b>ELBW-050-XX**</b>	Solite Spread (MR-11)	<b>250015420000</b>
SJ-Box	<b>SJ-XX**</b>	T-Mount Fitting	<b>TMNT-050-XX**</b>	Frosted Lens (MR-11)	<b>250010480000</b>
Post Mount	<b>PM-XX**</b>	Straight Riser	<b>YY-R-XX**</b>	Mini-Mount	<b>MM-050-XX</b>



Powder Coat: Standard




Powder Coat: Specialty



<sup>†</sup> Non-returnable

<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens

## MU STANDARD PLUS

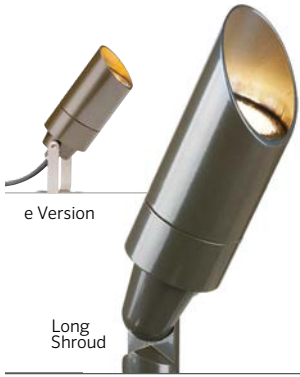

Fixture	Lamp	Compliance	Shroud Option	Finish
MU <sup>o</sup>	<b>LED20WFL</b> 261 Lumen Lamp 4.0W/4.3VA	[blank] ½" Thread (UL)	[blank] 15° Angled Shroud	BZ DG WI
	<b>LED35WFL</b> 337 Lumen Lamp 5.0W/5.4VA	e (CE)	LS 45° Angled Long Shroud	FB SB WG*†
	<b>LED50WFL</b> 447 Lumen Lamp 6.0W/6.5VA			FW*† AL*† SV*†
	<b>ZD35WFL</b> 337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor <sup>®</sup>			
	<b>NL</b> No Lamp			

**ORDERING EXAMPLE:** ▶ MU-LED20WFL-BZ = FIXTURE-LAMP-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

ACCESSORIES: Specify Separately

### Dimensions

Height: 7.2" (183 mm)  
Long Shroud: 8.7" (221 mm)  
Diameter: 2.2" (56 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Aluminum

Name	Code	Name	Code	Name	Code
Mini J-Box	<b>MJ-050-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	Solite Spread (MR-16)	<b>250015240000</b>
VersaBox	<b>VB-050-XX**</b>	90° EWWWow Fitting	<b>ELBW-050-XX**</b>	Frosted Lens (MR-16)	<b>250015170000</b>
SJ-Box	<b>SJ-XX**</b>	T-Mount Fitting	<b>TMNT-050-XX**</b>	RecessorRing (MR-16)	<b>RRMR16</b>
Post Mount	<b>PM-XX**</b>	Straight Riser	<b>YY-R-XX**</b>	ProAim Ratcheting Spike	<b>PARS</b>



## LO STANDARD PREMIUM



Fixture	Lamp	Shroud Option	Finish
LO <sup>o</sup>	<b>NL</b> No Lamp	[blank] Straight Cut Shroud	BS NP*†
	<b>LED20WFL</b> 261 Lumen Lamp 4.0W/4.3VA	LS 45° Angled Long Shroud	
	<b>LED35WFL</b> 337 Lumen Lamp 5.0W/5.4VA		
	<b>LED50WFL</b> 447 Lumen Lamp 6.0W/6.5VA		
	<b>ZD35WFL</b> 337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor <sup>®</sup>		

**ORDERING EXAMPLE:** ▶ LO-ZD35WFL-BS = FIXTURE-LAMP-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

ACCESSORIES: Specify Separately

### Dimensions

Height: 8.4" (213 mm)  
Diameter: 2.3" (57 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Brass


Name	Code	Name	Code	Name	Code
Post Mount	<b>PM-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>	Recessor Ring (MR-16)	<b>RRMR16</b>
VersaBox	<b>VB-050-XX**</b>	Hex Baffle (MR-16)	<b>250015260000</b>	ProAim Ratcheting Spike	<b>PARS</b>
Ground Mount	<b>GM-XX**</b>	Solite Spread (MR-16)	<b>250015240000</b>	Gutter Mount	<b>GM-SS</b>



### Powder Coat: Standard



### Powder Coat: Specialty




### Metal



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

## MR STANDARD PREMIUM



Long Shroud

Fixture	Lamp		Shroud Option	Finish
MR	NL	No Lamp	[blank] 1" (25 mm) Straight Shroud	CU NP**
			LS 45° Angled Long Shroud	

**ORDERING EXAMPLE:** ▶ MR-NL-LS-CU = FIXTURE-LAMP-SHROUD OPTION-FINISH

°Includes Super Slot Spike (753900)

### Dimensions

Height: 7.4" (188 mm)  
 Diameter: 2.2" (56 mm)  
 Lamp: MR-11  
 Lead: 10' (3 m)  
 Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YY-R-GT-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	Solite Spread (MR-11)	250015420000
SJ-Box	SJ-XX**	Hex Baffle (MR-11)	250015250000	Frosted Lens (MR-11)	250010480000



## LR STANDARD PREMIUM



Long Shroud

Fixture	Lamp		Shroud Option	Finish
LR°	NL	No Lamp	[blank] 1.5" (38 mm) Straight Shroud	CU NP**
	LED20WFL	261 Lumen Lamp 4.0W/4.3VA	LS 45° Angled Long Shroud	
	LED35WFL	337 Lumen Lamp 5.0W/5.4VA		
	LED50WFL	447 Lumen Lamp 6.0W/6.5VA		
	ZD35WFL	337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor®		

**ORDERING EXAMPLE:** ▶ LR-LED20WFL-CU = FIXTURE-LAMP-FINISH

°Includes Super Slot Spike (753900)

### Dimensions

Height: 8.3" (211 mm)  
 Diameter: 2.5" (64 mm)  
 Lamp: MR-16  
 Lead: 10' (3 m)  
 Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	Copper Riser with Fittings	YYΔ-R-GT-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	Solite Spread (MR-16)	250015240000
Ground Mount	GM-XX**	Hex Baffle (MR-16)	250015260000	Frosted Lens (MR-16)	250015170000



### Metal



+ Non-returnable \* May require longer lead time \*\* Finish code \* Total delivered lumens

## C-UL STANDARD PLUS



Fixture	Lamp	Shroud	Finish
C-UL <sup>◊</sup>	LED20WFL 180 Lumens* 4.0W/4.3VA	AS Adjustable Shroud	AB
	LED35WFL 250 Lumens* 5.0W/5.4VA		
	NL No Lamp		

**ORDERING EXAMPLE:** ▶ C-UL-LED20WFL-AS-AB = FIXTURE-LAMP-SHROUD-FINISH

<sup>◊</sup> Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.5" (165 mm)  
 Diameter: 4.0" (102 mm)  
 Lamp: MR-16  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-050-XX**	Post Mount	PM-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	Solite Spread (MR-16)	250015240000	Copper Riser with Fittings	YY-R-GT-XX**
SJ-Box	SJ-XX**	Frosted Lens (MR-16)	250015170000	Gutter Mount	GM-SS



C-UL-LED20WFL-AS-AB

### Metal



+ Non-returnable \* May require longer lead time \*\* Finish code \* Total delivered lumens



## C-WW STANDARD PLUS

Fixture	Lamp		Finish
C-WW <sup>◊</sup>	LED35W	170 Lumen Lamp 2.4W/2.6VA	AB

ORDERING EXAMPLE: ▶ C-WW-LED35W-AB = FIXTURE-LAMP-FINISH

◊ Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.5" (165 mm)  
 Width: 4.0" (102 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	ProAim Ratcheting Spike	PARS



C-WW-LED35W-AB



## C-WWL STANDARD PLUS

Fixture	Lamp		Finish
C-WWL <sup>◊</sup>	LED35WFL	183 Lumens* 5.0W/5.4VA	AB
	LED50WFL	218 Lumens* 6.0W/6.5VA	

ORDERING EXAMPLE: ▶ C-WWL-LED50WFL-AB = FIXTURE-LAMP-FINISH

◊ Includes Long Slot Spike (250015840000)



C-WWL-LED35WFL-AB

### Dimensions

Height: 6.5" (165 mm)  
 Width: 5.4" (137 mm)  
 Lamp: MR-16  
 Lead: 10' (3 m)  
 Material: Brass

### Metal



+ Non-returnable \* May require longer lead time \*\* Finish code \* Total delivered lumens

## WS STANDARD



Fixture	Lamp	Finish
WS <sup>o</sup>	LED35W 170 Lumen Lamp 2.4W/2.6VA	BZ DG WI FB SB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup>

**ORDERING EXAMPLE:** ▶ WS-LED35W-SV = FIXTURE-LAMP-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 6.4" (163 mm)  
Width: 4.0" (102 mm)  
Lamp: G4  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-050-XX**	Straight Coupling	COUP-XX**	Post Mount	PM-XX**
VersaBox	VB-050-XX**	90° Elbow Fitting	ELBW-050-XX**	Straight Riser	YY-R-XX**
SJ-Box	SJ-XX**	T-Mount Fitting	TMNT-050-XX**	Mini-Mount	MM-050-XX



WS-LED35W-BZ

## RL STANDARD PREMIUM



Fixture	Lamp	Finish
RL <sup>o</sup>	NL No Lamp	BZ DG WI FB SB WG* <sup>†</sup> FW* <sup>†</sup> AL* <sup>†</sup> SV* <sup>†</sup> CU NP* <sup>†</sup>
	LED20W 123 Lumen Lamp 1.1W/1.7VA	
	LED35W 170 Lumen Lamp 2.4W/2.6VA	

**ORDERING EXAMPLE:** ▶ RL-LED20W-CU = FIXTURE-LAMP-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

### Dimensions

Height: 6.0" (152 mm)  
Diameter: 2.0" (51 mm)  
Lamp: G4  
Lead: 10' (3 m)  
Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	ProAim Ratcheting Spike	PARS



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>†</sup> Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens



---

*Use path lights* to softly illuminate walkways, create ambience, increase safety, and highlight landscape features along the way.

*Choose from a variety of styles in metal and powder coat finishes to complement an array of settings.*



# STANDARD SERIES

## Path and Area Lights



MODERN AND TRADITIONAL LIGHTS



SPA-LED20W-12R-BZ

Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance

**SP** STANDARD PREMIUM



Fixture	Lamp	Riser Height	Finish
SP <sup>o</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	8R 8" (200 mm)	BZ DG WI FB SB WG <sup>††</sup> FW <sup>††</sup> AL <sup>††</sup> SV <sup>††</sup> CU NP <sup>††</sup>
	NL No Lamp	12R 12" (300 mm)	AB* AT* (no lamp, 12/18" option only)
		18R 18" (450 mm)	
		24R 24" (600 mm)	
		36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ SP-LED20W-12R-CU = FIXTURE-LAMP-RISER-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

ACCESSORIES: Specify Separately

**Dimensions**

Height: 14.5" (368 mm)<sup>±</sup>  
 Diameter: 3.6" (91 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Copper/Brass

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Ground Mount	GM-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000	Copper Riser with Fittings	YY-R-GT-XX**
VersaBox	VB-050-XX**				



**DL** STANDARD PREMIUM



Fixture	Lamp	Riser Height	Finish
DL <sup>o</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	8R 8" (200 mm)	BZ DG WI FB SB WG <sup>††</sup> FW <sup>††</sup> AL <sup>††</sup> SV <sup>††</sup> CU NP <sup>††</sup>
	NL No Lamp	12R 12" (300 mm)	AB* AT* (no lamp, 12/18" option only)
		18R 18" (450 mm)	
		24R 24" (600 mm)	
		36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ DL-LED20W-18R-CU = FIXTURE-LAMP-RISER-FINISH

<sup>o</sup> Includes Super Slot Spike (753900)

ACCESSORIES: Specify Separately

**Dimensions**

Height: 15.6" (396 mm)<sup>±</sup>  
 Diameter: 6.3" (160 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Copper/Brass


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Ground Mount	GM-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000		
VersaBox	VB-050-XX**	Copper Riser with Fittings	YY-R-GT-XX**		



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>†</sup> Non-returnable

\* May require longer lead time \*\* Finish code <sup>††</sup> Total delivered lumens ± With 12" (300 mm) riser

## Petite STANDARD PREMIUM

**DIMENSIONS**  
Overall Height:  
15.1" (384 mm)<sup>†</sup>  
Diameter: 5.1"  
(130 mm)



PF

**DIMENSIONS**  
Overall Height:  
14.7" (374 mm)<sup>†</sup>  
Diameter: 3.8"  
(97 mm)



PR

**DIMENSIONS**  
Overall Height:  
15.0" (381 mm)<sup>†</sup>  
Diameter: 4.7"  
(119 mm)



SC

## Grande STANDARD PREMIUM

**DIMENSIONS**  
Overall Height:  
15.5" (394 mm)<sup>†</sup>  
Diameter: 7.1"  
(180 mm)



DM

**DIMENSIONS**  
Overall Height:  
15.1" (384 mm)<sup>†</sup>  
Diameter:  
7.1" (180 mm)



CV

**DIMENSIONS**  
Overall Height:  
15.4" (391 mm)<sup>†</sup>  
Diameter:  
7.6" (193 mm)



CA

GENERAL Riser: ¾" Lead: 10' (3 m)

Fixture	Lamp	Riser Height	Finish
PF <sup>◊</sup> PR <sup>◊</sup> SC <sup>◊</sup> DM <sup>◊◊</sup> CV <sup>◊◊</sup> CA <sup>◊◊</sup>	<b>LED20W</b> 123 Lumen Lamp 1.1W/1.7VA	<b>8R</b> 8" (200 mm)	<b>BZ DG WI SB FB WG<sup>††</sup> FW<sup>††</sup> AL<sup>††</sup> SV<sup>††</sup> CU NP<sup>††</sup></b> Additional finishes for DM: <b>AB* AT*</b>
	<b>NL</b> No Lamp	<b>12R</b> 12" (300 mm)	
		<b>18R</b> 18" (450 mm)	
		<b>24R*</b> 24" (600 mm)	
		<b>36R*</b> 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **PF-LED20W-18R-CU** = FIXTURE- LAMP-RISER HEIGHT-FINISH

◊ Includes Super Slot Spike (753900) ◊◊ Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	<b>SJ-XX**</b>	ProAim Ratcheting Spike	<b>PARS</b>	Ground Mount	<b>GM-XX**</b>
Post Mount	<b>PM-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	3-Prong Spike	<b>250020020000</b>
VersaBox	<b>VB-050-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>		



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>†</sup> Non-returnable

<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens <sup>†</sup> With 12" (300 mm) riser

# Aluminum STANDARD PLUS

## DIMENSIONS

Height: 14.5" (368 mm)<sup>±</sup>  
 Diameter: 3.6" (91 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Aluminum



SP-A

## DIMENSIONS

Height: 15.6" (396 mm)<sup>±</sup>  
 Diameter: 6.3" (160 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Aluminum



DL-A

## DIMENSIONS

Height: 15.6" (391 mm)<sup>±</sup>  
 Diameter: 7.6" (193 mm)  
 Riser Diameter: ½"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Aluminum



CA-A

## DIMENSIONS

Height: 15.5" (394 mm)<sup>±</sup>  
 with 18" (450 mm) riser  
 Diameter: 10.0" (254 mm)  
 Riser Diameter: 1 ¼"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Aluminum



DM-A

Fixture	Lamp	Riser Height	Finish
SP-A <sup>◊</sup> DL-A <sup>◊</sup> CA-A <sup>◊</sup> DM-A <sup>◊◊</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	8R 8" (200 mm) 12R 12" (300 mm) 18R 18" (450 mm) 24R* 24" (600 mm) 36R* 36" (900 mm)	BZ DG WI FB SB WG** FW** AL** SV**

**ORDERING EXAMPLE:** ▶ SP-A-LED20W-12R-BZ = FIXTURE-LAMP-RISER-FINISH

◊ Includes Super Slot Spike (753900) ◊◊ Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	ProAim Ratcheting Spike	PARS	Ground Mount	GM-XX**
Post Mount	PM-XX**	Straight Coupling	COUP-XX**	3-Prong Spike	250020020000
VersaBox	VB-050-XX**	Copper Riser with Fittings	YY-R-GT-XX**	Aluminum Straight Coupling	COUP-XX**
Straight Riser	YY-R-XX**				



### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



+ Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens ± With 12" (300 mm) riser

STANDARD PLUS

DIMENSIONS

Height: 15.1" (384 mm)<sup>±</sup>  
 Diameter: 6.0" (152 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 9' (2.7 m)  
 Material: Aluminum



PL

DIMENSIONS

Height: 15.5" (394 mm)<sup>±</sup>  
 Diameter: 5.0" (127 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 9' (2.7 m)  
 Material: Aluminum



TM

Fixture	Lamp	Riser Height	Finish
PL <sup>◊</sup> TM <sup>◊</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	8R 8" (200 mm)	BZ DG WI FB SB WG** FW** AL**† SV**†
	NL No Lamp	12R 12" (300 mm)	
		18R 18" (450 mm)	
		24R 24" (600 mm)	
		30R 30" (750 mm)	
		36R 36" (900 mm)	

ORDERING EXAMPLE: ▶ PL-LED20W-12R-BZ = FIXTURE-LAMP-RISER-FINISH

◊ Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Straight Coupling	COUP-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	Aluminum Riser	YY-R-XX**	Ground Mount	GM-XX**
VersaBox	VB-050-XX**	3-Prong Spike	250020020000		



Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens ± With 12" (300 mm) riser

STANDARD PLUS

DIMENSIONS

Height: 21.0" (523 mm)  
 Diameter: 4.3" (109 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass



C-PL-4

DIMENSIONS

Height: 21.5" (546 mm)  
 Diameter: 6.5" (165 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass



C-PL-7

GENERAL Riser: 1.0" Lead: 10' (3 m)

Fixture	Lamp	Riser Height	Finish
C-PL-4 <sup>†</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	18R 18" (450 mm)	AB

C-PL-7<sup>†</sup>

ORDERING EXAMPLE: ▶ C-PL-7-LED20W-18R-AB = FIXTURE-LAMP-RISER-FINISH

<sup>†</sup> Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	VersaBox	VB-050-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000	Ground Mount	GM-XX**



C-PL-4-LED20W-18R-AB  
 C-PL-7-LED20W-18R-AB

Metal



<sup>†</sup> Non-returnable  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>☆</sup> Total delivered lumens

**GT** STANDARD PREMIUM



Fixture	Lamp	Riser Height	Finish
GT <sup>o</sup>	<b>LED20W</b> 123 Lumen Lamp 1.6W/1.7VA	<b>8R</b> 8" (200 mm)	<b>BZ DG WI FB SB WG** FW** AL** SV** CU NP**</b>
	<b>NL</b> No Lamp	<b>12R</b> 12" (300 mm)	
		<b>18R</b> 18" (450 mm)	
		<b>24R</b> 24" (600 mm)	
		<b>36R</b> 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **GT-LED20W-18R-CU** = FIXTURE-LAMP-RISER-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 18.8" (478 mm)<sup>±</sup>  
 Diameter: 4.0" (102 mm)  
 Riser Diameter: 1.0"  
 Lamp: G4  
 Lead: 9' (2.7 m)  
 Material: Copper/Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	<b>SJ-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>	3-Prong Spike	<b>250020020000</b>
Post Mount	<b>PM-XX**</b>	ProAim Ratcheting Spike	<b>PARS</b>	VersaBox	<b>VB-050-XX**</b>



**GN** STANDARD PREMIUM



Fixture	Lamp	Riser Option	Finish
GN <sup>o</sup>	<b>LED20W</b> 123 Lumen Lamp 1.6W/1.7VA	<b>12R</b> 12" (300 mm)	<b>BZ DG WI FB SB WG** FW** AL** SV** CU NP**</b>
	<b>NL</b> No Lamp	<b>18R</b> 18" (450 mm)	
		<b>24R</b> 24" (600 mm)	
		<b>36R</b> 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **GN-LED20W-24R-CU** = FIXTURE-LAMP-RISER-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

**Dimensions**

Height: 22.1" (563 mm)  
 with 18" (450 mm) riser  
 Diameter: 10.0" (254 mm)  
 Riser Diameter: 1 1/4"  
 Lamp: G4  
 Lead: 10' (3 m)

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	<b>SJ-XX**</b>	Copper Riser with Fittings	<b>YY-R-GT-XX**</b>	VersaBox	<b>VB-050-XX**</b>
Post Mount	<b>PM-XX**</b>	3-Prong Spike	<b>250020020000</b>	ProAim Ratcheting Spike	<b>PARS</b>
Ground Mount	<b>GM-XX**</b>				



Powder Coat: Standard



Powder Coat: Specialty



Metal



<sup>+</sup> Non-returnable  
<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens <sup>±</sup> With 12" (300 mm) riser

## TD STANDARD PREMIUM



Fixture	Lamp	Riser Option	Finish
TD <sup>o</sup>	12 12W Incandescent	[blank] Standard 18" (450 mm)	BZ DG WI FB SB WG** FW** AL** SV** CU NP**
	18 18W Incandescent	XT Extra Tall 30" (750 mm)	
	25 25W Incandescent		

**ORDERING EXAMPLE:** ▶ TD-12-CU = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

### Dimensions

Height: 18.0" (457 mm)  
 XT: 29.5" (75 mm)  
 Diameter: 5.0" (127 mm)  
 Riser Diameter: 3/8"  
 Lamp: SCB  
 Lead: 9' (2.7 m)  
 Material: Copper/Brass

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**	VersaBox	VB-050-XX**
Post Mount	PM-XX**	3-Prong Spike	250020020000	ProAim Ratcheting Spike	PARS



## FG STANDARD PREMIUM



Fixture	Lamp	Finish
FG <sup>o</sup>	12 12W Incandescent	BZ DG WI FB SB WG** FW** AL** SV** CU NP**
	18 18W Incandescent	
	25 25W Incandescent	

**ORDERING EXAMPLE:** ▶ FG-25-CU = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

ACCESSORIES: Specify Separately

### Dimensions

Height: 18.0" (457 mm)  
 Diameter: 5.0" (127 mm)  
 Riser Diameter: 3/8"  
 Lamp: G4  
 Lead: 9' (2.7 m)  
 Material: Copper/Brass


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**	VersaBox	VB-050-XX**
Post Mount	PM-XX**	3-Prong Spike	250020020000	ProAim Ratcheting Spike	PARS



### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



+ Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens





## AL STANDARD PLUS

Fixture	Lamp		Finish
AL <sup>o</sup>	12	12W Incandescent	BZ DG WI FB SB WG** FW** AL** SV**
	18	18W Incandescent	
	25	25W Incandescent	

**ORDERING EXAMPLE:** ▶ AL-18-BZ = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

### Dimensions

Height: 27.5" (699 mm)  
 Diameter: 5.6" (142 mm)  
 Riser Diameter: 1/4"  
 Lamp: SCB  
 Lead: 9' (2.7 m)  
 Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**	VersaBox	VB-050-XX**
Post Mount	PM-XX**	3-Prong Spike	250020020000	ProAim Ratcheting Spike	PARS



## PM STANDARD PLUS

Fixture	Lamp		Finish
PM <sup>o</sup>	LED20WWF	261 Lumen Lamp 4.0W/4.3VA	BZ DG WI FB SB WG** FW** AL** SV**
	LED35WWF	337 Lumen Lamp 5.0W/5.4VA	
	ZD35WWF	337 Lumen Lamp 5.0W/5.4VA	
	NL	No Lamp	

**ORDERING EXAMPLE:** ▶ PM-LED20WWF-BZ = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Long Slot Spike (250015840000)

### Dimensions

Height: 14.0" (356 mm)  
 Diameter: 2.5" (64 mm)  
 Lamp: MR-16  
 Lead: 9' (2.7 m)  
 Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code
Post Mount	PM-XX**



### Powder Coat: Standard



### Powder Coat: Specialty



+ Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

## DS STANDARD



Fixture	Lamp	Tier Option	Riser Height	Finish
DS <sup>o</sup>	NL No Lamp	[blank] Standard (3 Tiers)	8R 8" (200 mm)	BZ DG WI FB SB WG** FW** AL* SV**
		2T 2-Tier Option	12R 12" (300 mm)	
			18R 18" (450 mm)	
			24R 24" (600 mm)	
			30R 30" (750 mm)	
			36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ DS-NL-2T-24R-SB = FIXTURE-LAMP-TIER OPTION-RISER-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

### Dimensions

3-Tier:  
Height: 13.8" (351 mm)<sup>±</sup>  
2-Tier:  
Height: 12.0" (305 mm)  
Diameter: 6.0" (152 mm)  
Lamp: G4  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Straight Coupling	COUP-XX**	Ground Mount	GM-XX**
Post Mount	PM-XX**	Aluminum Riser	YY-R-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	3-Prong Spike	250020020000		



## DR STANDARD



Fixture	Lamp	Tier Option	Riser Height	Finish
DR <sup>o</sup>	NL No Lamp	[blank] Standard (3 Tiers)	8R 8" (200 mm)	BZ DG WI FB SB WG** FW** AL* SV**
		2T 2-Tier Option	12R 12" (300 mm)	
			18R 18" (450 mm)	
			24R 24" (600 mm)	
			30R 30" (750 mm)	
			36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ DR-NL-36R-SB = FIXTURE-LAMP-RISER-FINISH

<sup>o</sup> Includes Long Slot Spike (250015840000)

### Dimensions

3-Tier:  
Height: 14.3" (363 mm)<sup>±</sup>  
2-Tier:  
Height: 12.5" (318 mm)  
Diameter: 10.0" (254 mm)  
Lamp: G4  
Lead: 9' (2.7 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Straight Coupling	COUP-XX**	Ground Mount	GM-XX**
Post Mount	PM-XX**	Aluminum Riser	YY-R-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	3-Prong Spike	250020020000		



### Powder Coat: Standard



### Powder Coat: Specialty



<sup>±</sup> Non-returnable

<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens <sup>±</sup> With 12" (300 mm) riser

*Use path lights to accent landscape features such as shrubs, flowers, and planters.*



# STANDARD SERIES

## Wall Lights

---

*Add wall lights* to your lighting design to increase safety, define perimeters, and softly enhance architectural elements and stonework.

*Choose from a variety of elegant styles to seamlessly integrate wall lighting into any setting.*



LINEAR AND CIRCULAR WALL LIGHTS



Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance



**CG** STANDARD PREMIUM



Fixture	Lamp	Finish
CG <sup>o</sup>	NL No Lamp	BZ DG WI FB SB WG** FW** AL* SV** BS NP**

**ORDERING EXAMPLE:** ▶ **CG-NL-BS** = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes 2" Schedule 40 Conduit (250013670000)



**Dimensions**

Depth: 3.1" (80 mm)  
 Diameter: 3.0" (76 mm)  
 Conduit: 2" Diameter  
 Lamp: MR-8  
 Lead: 10' (3 m)  
 Material: Brass

**CP** STANDARD PREMIUM



Fixture	Lamp	Finish
CP <sup>o</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA each	BZ DG WI FB SB WG** FW** AL* SV** CU NP**

**ORDERING EXAMPLE:** ▶ **CP-LED20W-BZ** = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Sleeve and Cover (250022040000)

ACCESSORIES: Specify Separately

Name	Code
Wall Light Connection Kit	EKITWALL

**Dimensions**

Height: 3.5" (89 mm)  
 Width: 5.0" (127 mm)  
 Depth: 4.3" (110 mm)  
 Exposed Depth: 0.5" (13 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Copper



**LM** STANDARD PREMIUM



Fixture	Lamp	Finish
LM <sup>o</sup>	LED40W 2 x 123 Lumen Lamps 1.6W/1.7VA each	BZ DG WI FB SB WG** FW** AL* SV** CU NP**

**ORDERING EXAMPLE:** ▶ **LM-LED40W-CU** = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Sleeve and Cover (250022030000)

ACCESSORIES: Specify Separately

Name	Code
Wall Light Connection Kit	EKITWALL

**Dimensions**


Height: 3.5" (89 mm)  
 Width: 9.0" (229 mm)  
 Depth: 4.3" (110 mm)  
 Exposed Depth: 0.5" (13 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Copper




Powder Coat: Standard



Powder Coat: Specialty



Metal



† Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## MM STANDARD PLUS



Fixture	Lamp	Finish
MM	LED20W 123 Lumen Lamp 1.6W/1.7VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† BS NP*†

ORDERING EXAMPLE: ▶ MM-LED20W-BZ = FIXTURE-LAMP-FINISH

### Dimensions

Depth: 1.8" (45 mm)  
 Diameter: 3.3" (83 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass or Aluminum



MM-LED20W-BZ

## UN STANDARD PREMIUM



Fixture	Lamp	Finish
UN <sup>o</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† BS NP*† CB DT

ORDERING EXAMPLE: ▶ UN-LED20W-CB = FIXTURE-LAMP-FINISH

### Dimensions

Height: 3.6" (91 mm)  
 Width: 5.2" (132 mm)  
 Depth: 4.4" (112 mm)  
 Exposed Depth: 1.1" (28 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass or Composite

<sup>o</sup> Includes Sleeve and Cover (250022040000)

ACCESSORIES: Specify Separately

Name	Code
Wall Light Connection Kit	EKITWALL



## PD STANDARD PREMIUM



Fixture	Lamp	Finish
PD <sup>o</sup>	LED40W 2 x 123 Lumen Lamp 1.6W/1.7VA each	BZ DG WI FB SB WG*† FW*† AL*† SV*† BS NP*† CB DT

ORDERING EXAMPLE: ▶ PD-LED40W-CB = FIXTURE-LAMP-FINISH

<sup>o</sup> Includes Sleeve and Cover (250022030000)

ACCESSORIES: Specify Separately


Name	Code
Wall Light Connection Kit	EKITWALL



### Powder Coat: Standard




### Powder Coat: Specialty



### Metal




### Composite



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

## BP STANDARD PREMIUM



Fixture	Lamp	Finish
BP	LED20W 123 Lumen Lamp 1.6W/1.7VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† CU SS BS

ORDERING EXAMPLE: ▶ **BP-LED20W-CU** = FIXTURE-LAMP-FINISH



### Dimensions

Height: 1.0" (25 mm)  
 Width: 5.9" (150 mm)  
 Depth: 3.5" (89 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Stainless Steel and Aluminum

## C-LL STANDARD PLUS



Fixture	Lamp	Finish
C-LL	LED20W 151 Lumens* 4.0W/4.2VA	AB

ORDERING EXAMPLE: ▶ **C-LL-LED20W-AB** = FIXTURE-LAMP-FINISH




### Dimensions

Height: 0.8" (19 mm)  
 Width: 6.9" (175 mm)  
 Depth: 0.8" (20 mm)  
 Lead: 10' (3 m)  
 Material: Brass

### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens





*Use wall lights to accent stone architecture or brickwork.*



---

*Down lights* provide clean transitions and effective top-down illumination to highlight architecture, patios, verandas, gathering spaces, and more.


*FX Luminaire down lights are specially engineered to guide water away from the fixtures. Choose from a range of accessories to optimize installation in any setting.*



# STANDARD SERIES

Down Lights

## MOUNTED AND HANGING LIGHTS

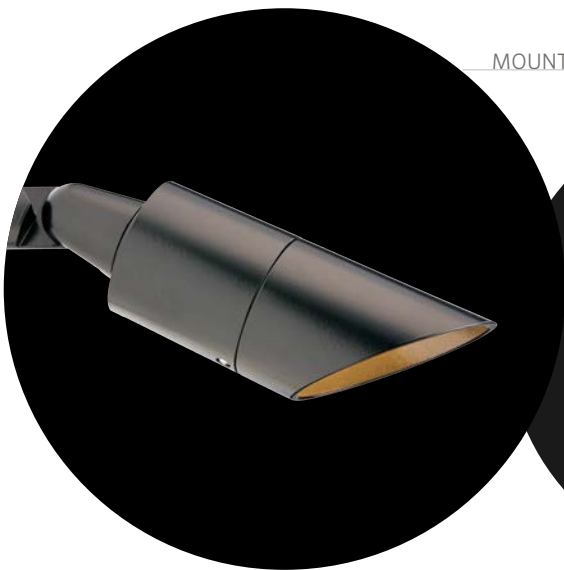

Signifies products available for quick delivery



Identifies UL rated products




Signifies CE or RCM certified products



IP rating indicates water and dust resistance

## MD STANDARD PLUS

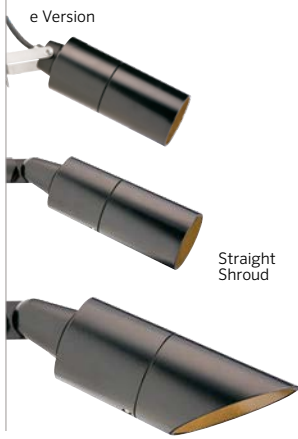

Fixture	Lamp	Compliance	Shroud Option	Finish
MD	LED20WFL 261 Lumen Lamp 4.0W/4.3VA	[blank] Mini-Mount included (UL)	[blank] 45° Angled Shroud	BZ DG WI FB SB
	LED35WFL 337 Lumen Lamp 5.0W/5.4VA	e Bracket Mount (CE)	SS 3" Straight Shroud	WG†† FW†† AL*† SV*†
	LED50WFL 447 Lumen Lamp 6.0W/6.5VA			
	ZD35WFL 337 Lumen Lamp 5.0W/5.4VA Zone/ Dim with Luxor®			
	NL No Lamp			

ORDERING EXAMPLE: ▶ MD-LED35WFL-SB = FIXTURE-LAMP-FINISH

### Dimensions

Length: 7.6" (193 mm)  
Diameter: 2.9" (74 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
TreeBox	TB-XX**	Straight Coupling	COUP-XX**	Hex Baffle (MR-16)	250015260000
Mini J-Box	MJ-050-XX**	90° Elbow Fitting	ELBW-050-XX**	Solite Spread (MR-16)	250015240000
Wall Plate, 1-G	WP-1G-050-XX**	T-Mount Fitting	TMNT-050-XX**	Frosted Lens (MR-16)	250015170000
Wall Plate, Rnd	WP-RD-050-XX**	Straight Riser	YY-R-XX**	Recessor Ring (MR-16)	RRMR16
Mini-Mount	MM-050-XX				



## C-DL STANDARD PLUS



Fixture	Lamp	Finish
C-DL <sup>◊</sup>	LED20WFL 91 Lumens* 4.0W/4.3VA	AB
	LED35WFL 138 Lumens* 5.0W/5.4VA	
	NL No Lamp	

ORDERING EXAMPLE: ▶ C-DL-LED20WFL-AB = FIXTURE-LAMP-FINISH

◊ Includes Wall Canopy

### Dimensions

Length: 10.7" (272 mm)  
Diameter: 2.9" (74 mm)  
Lamp: MR-16  
Lead: 26' (8 m)  
Material: Brass

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Hex Baffle (MR-16)	250015260000	Solite Spread (MR-16)	250015240000	Frosted Lens (MR-16)	250015170000



### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

**TC** STANDARD PREMIUM



Fixture	Lamp	Finish
TC	LED203NF 135 Lumens* 2.3W/3.8VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† CU NP*†
	NL No Lamp	

**ORDERING EXAMPLE:** ▶ TC-LED203NF-CU = FIXTURE-LAMP-FINISH



**Dimensions**

Height: 3.5" (89 mm)  
 Width/Depth: 2.8" (70 mm)  
 Lamp: AR-11  
 Material: Copper/Brass

**CL** STANDARD PREMIUM



Fixture	Lamp	Finish
CL	LED203NF 135 Lumens* 2.3W/3.8VA	BZ DG WI FB SB WG*† FW*† AL*† SV*† CU NP*†
	NL No Lamp	

**ORDERING EXAMPLE:** ▶ CL-LED203NF-CU = FIXTURE-LAMP-FINISH




**Dimensions**

Height: 3.5" (89 mm)  
 Diameter: 3.3" (83 mm)  
 Lamp: AR-11  
 Material: Copper/Brass

**Powder Coat: Standard**



**Powder Coat: Specialty**



**Metal**



† Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## TS STANDARD PLUS



Fixture	Lamp	Finish
TS	NL No Lamp	BZ DG WI FB SB WG <sup>†</sup> FW <sup>†</sup> AL <sup>†</sup> SV <sup>†</sup> CU NP <sup>†</sup>
	LED203NF 135 Lumens* 2.3W/3.8VA	

ORDERING EXAMPLE: ▶ TS-LED203NF-FW = FIXTURE-LAMP-FINISH

### Dimensions

Length: 6.5" (165 mm)  
 Diameter: 2.4" (61 mm)  
 Lamp: AR-11  
 Material: Copper or Aluminum

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-TS-XX**	VersaBox	VB-TS-XX**	TS Lamp Tool	250010130000



## LS STANDARD PREMIUM



Fixture	Lamp	Finish
LS	12 12W Incandescent	CU NP <sup>†</sup>

ORDERING EXAMPLE: ▶ LS-12-CU = FIXTURE-LAMP-FINISH

### Dimensions

Height: 3.0" (76 mm)  
 Diameter: 1.6" (41 mm)  
 Lamp: SCB  
 Material: Copper/Brass



## VL STANDARD PREMIUM



Fixture	Lamp	Finish
VL	LED203NF 135 Lumens* 2.3W/3.8VA	BZ DG WI SB FB WG <sup>†</sup> FW <sup>†</sup> AL <sup>†</sup> SV <sup>†</sup> CU NP <sup>†</sup>
	NL No Lamp	

ORDERING EXAMPLE: ▶ VL-LED203NF-CU = FIXTURE-LAMP-FINISH

### Dimensions


Height: 4.7" (119 mm)  
 Diameter: 2.0" (51 mm)  
 Lamp: AR-11  
 Material: Copper/Brass



### Powder Coat: Standard



### Powder Coat: Specialty



### Metal



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

*From gardens to outdoor dining areas, we offer a full suite of down lights to meet the needs of any installation.*





WELL LIGHTS AND UNDERWATER LIGHTS



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance





# STANDARD SERIES

## Specialty Lights

---

*Our specialty lights* are carefully engineered for peak performance in lighting designs that stretch the boundaries of creativity.

*From underwater to in-grade applications, FX Luminaire specialty lights are designed to bring statement pieces to life.*

## FC STANDARD PREMIUM



Ring

Louver



Cowling

Fixture	Lamp	Compliance	Style Option	Finish
FC <sup>o</sup>	NL No Lamp	[blank] (UL)	RG Ring	BS NP** CB DT
	LED20W (FL or WF) 261 Lumen Lamp 4.0W/4.3VA	e (CE)	LV Louver	
	LED35W (FL or WF) 337 Lumen Lamp 5.0W/5.4VA		CW Cowling	
	LED50WFL 447 Lumen Lamp 6.0W/6.5VA			
	ZD35W (FL or WF) 337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor			

ORDERING EXAMPLE: ▶ FC-LED20WFL-CW-CB = FIXTURE-LAMP-STYLE OPTION-FINISH

<sup>o</sup>Includes Construction Sleeve (250014350000)



### Dimensions

Height: RG: 4.8" (122 mm)

LV: 5.1" (130 mm)


CW: 6.8" (173 mm)

Diameter: 4.0" (102 mm)

Lamp: MR-16

Material: Brass or Composite

## RP STANDARD PREMIUM



Ring

Cowling



Louver

Fixture	Lamp	Compliance	Style Option	Finish
RP <sup>o</sup>	LED20WFL 261 Lumen Lamp 4.0W/4.3VA	[blank] (UL)	RG Ring	BS NP** CB DT
	LED35WFL 337 Lumen Lamp 5.0W/5.4VA	e (CE)	LV Louver	
	LED50WFL 447 Lumen Lamp 6.0W/6.5VA		CW Cowling	
	ZD35WFL 337 Lumen Lamp 5.0W/5.4VA			
	NL No Lamp			

ORDERING EXAMPLE: ▶ RP-LED20WFL-LV-BS = FIXTURE-LAMP-SHROUD-FINISH

<sup>o</sup>Includes Construction Sleeve (250014350000)



### Dimensions

Height: RG: 9.0" (229 mm)

LV: 9.3" (236 mm)

CW: 11.0" (279 mm)

Diameter: 7.0" (178 mm)

Lamp: MR-16

Material: Brass or Composite

### Metal



### Composite



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens



## C-IN STANDARD

Fixture	Lamp	Finish
C-IN	LED35WFL 242 Lumens* 5.0W/5.4VA	AB
	LED50WFL 333 Lumens* 6.0W/6.5VA	

ORDERING EXAMPLE: ▶ C-IN-LED50WFL-AB = FIXTURE-LAMP-FINISH



### Dimensions

Height: 5.5" (128 mm)  
 Diameter: 3.8" (97 mm)  
 Lamp: MR-16  
 Material: Brass



## CF STANDARD

Fixture	Lamp	Finish
CF <sup>o</sup>	NL No Lamp	CB DT
	20 35 20, 35W Halogen	

ORDERING EXAMPLE: ▶ CF-20-CB = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Construction Sleeve (250014350000)



### Dimensions

Height: 9.0" (229 mm)  
 Diameter: 6.0" (155 mm)  
 Lamp: PAR-36  
 Material: Composite



## TE STANDARD PREMIUM

Fixture	Lamp	Compliance	Finish
TE <sup>o</sup>	LED20WFL 261 Lumen Lamp 4.0W/4.3VA	[blank] (UL)	BS NP**
	LED35WFL 337 Lumen Lamp 5.0W/5.4VA	e (CE)	
	LED50WFL 447 Lumen Lamp 6.0W/6.5VA		
	ZD35WFL 337 Lumen Lamp 5.0W/5.4VA		
	NL No Lamp		

ORDERING EXAMPLE: ▶ TE-LED35WFL-BS = FIXTURE-LAMP-FINISH


<sup>o</sup>Includes Construction Sleeve (250014350000)



### Dimensions

Height: 9.0" (229 mm)  
 Diameter: 6.0" (152 mm)  
 Lamp: MR-16  
 Material: Brass

### Metal



### Composite



+ Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

## LB STANDARD PREMIUM



Fixture	Lamp	Compliance	Finish	Wire Lead
LB	LED20WFL 261 Lumen Lamp 4.0W/4.3VA	[blank] (UL)	BS	[blank] 16' (5 m)
	LED35WFL 337 Lumen Lamp 5.0W/5.4VA	e (CE)	30	30' (9 m)
	LED50WFL 447 Lumen Lamp 6.0W/6.5VA		50	50' (15 m)
	ZD35WFL 337 Lumen Lamp 5.0W/5.4VA			
	NL No Lamp			

**ORDERING EXAMPLE:** ▶ LB-LED35WFL-BS-30 = FIXTURE-LAMP-FINISH-LEAD



### Dimensions


Height: 5.2" (132 mm)  
 Diameter: 3.0" (76 mm)  
 Lamp: MR-16  
 Material: Brass

### Metal



† Non-returnable  
 \* May require longer lead time \*\* Finish code \* Total delivered lumens

*Use specialty lights to bring architecture and outdoor environments to life.*

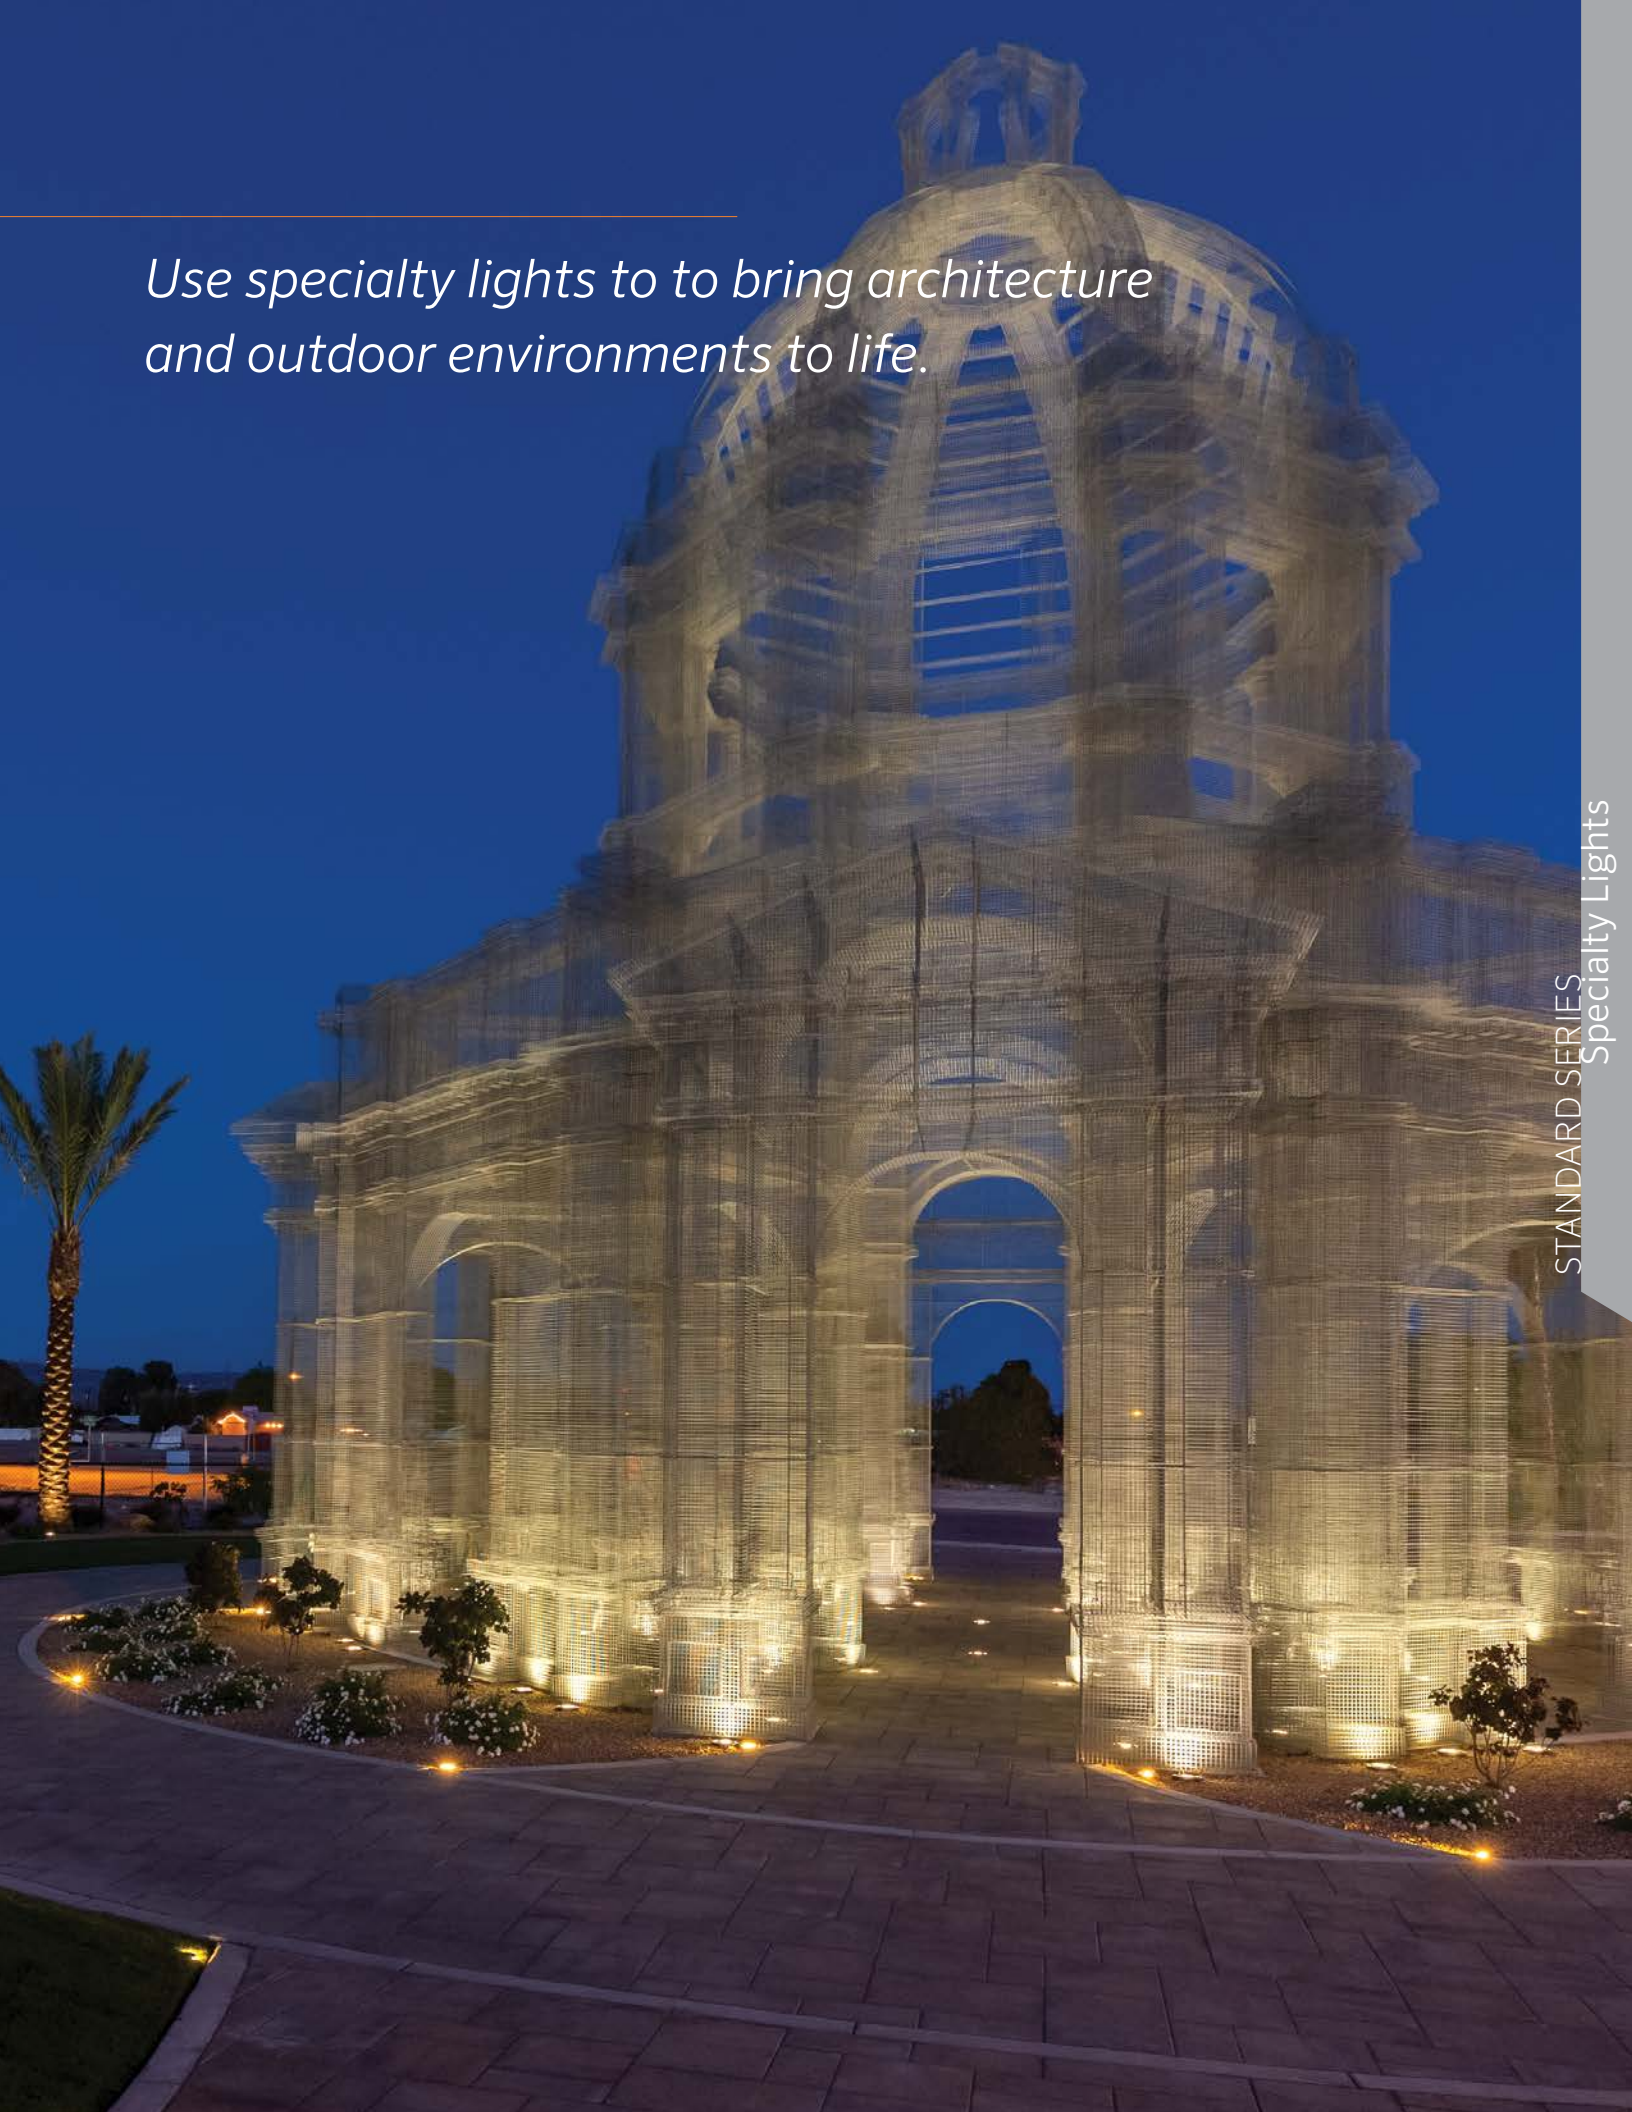

STANDARD SERIES  
Specialty Lights

# VALUE LINE



---

*Beauty and timeless design* are essential components of any lighting installation, regardless of budget. With the FX Luminaire Value Line, you can offer customers a high-quality, system-level lighting solution at a lower price.

*Designed with rounded, minimalist features and durable die-cast aluminum, Value Line fixtures are highly versatile and affordable.*



PATH AND DIRECTIONAL LIGHTS



WS-LED35W-BZ

Signifies products available for quick delivery



Identifies UL rated products



Signifies CE or RCM certified products



IP rating indicates water and dust resistance

## RS STANDARD



Long Shroud

Fixture	Lamp	Configuration	Shroud	Finish
RS <sup>o</sup>	<b>LED20WFL</b> 261 Lumen Lamp 4.0W/4.3VA	[blank] ½" Thread	[blank] 15° Angled Shroud	<b>BZ DG WI SB FB</b>
	<b>LED35WFL</b> 337 Lumen Lamp 5.0W/5.4VA		<b>LS</b> 45° Angled Long Shroud	
	<b>ZD35WFL</b> 337 Lumen Lamp 5.0W/5.4VA Zone/Dim with Luxor <sup>®</sup>			
	<b>NL</b> No Lamp			
	<b>20</b> 20W Halogen			
	<b>35</b> 35W Halogen			

**ORDERING EXAMPLE:** ▶ **RS-LED20WFL-LS-BZ** = FIXTURE-LAMP-OPTION-FINISH

<sup>o</sup>Includes Super Slot Spike (753900)

### Dimensions

Height: 6.6" (168 mm)  
Diameter: 2.5" (64 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Zinc

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	<b>MJ-050-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	Hex Baffle (MR-16)	<b>250015260000</b>
SJ-Box	<b>SJ-XX**</b>	90° Elbow Fitting	<b>ELBW-050-XX**</b>	Frosted Lens (MR-16)	<b>250015170000</b>
Straight Riser	<b>YY-R-XX**</b>	T-Mount Fitting	<b>TMNT-050-XX**</b>	Solite Spread (MR-16)	<b>250015240000</b>



## WS STANDARD



Fixture	Lamp	Finish
WS <sup>o</sup>	<b>LED35W</b> 170 Lumen Lamp 2.4W/2.6VA	<b>BZ DG WI FB SB WG*† FW*† AL*† SV*†</b>

**ORDERING EXAMPLE:** ▶ **WS-LED35W-SV** = FIXTURE-LAMP-FINISH

<sup>o</sup>Includes Super Slot Spike (753900)

### Dimensions

Height: 6.4" (163 mm)  
Diameter: 3.3" (84 mm)  
Lamp: G4  
Lead: 10' (3 m)  
Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
Mini J-Box	<b>MJ-050-XX**</b>	Straight Coupling	<b>COUP-XX**</b>	Post Mount	<b>PM-XX**</b>
VersaBox	<b>VB-050-XX**</b>	90° Elbow Fitting	<b>ELBW-050-XX**</b>	Straight Riser	<b>YY-R-XX**</b>
SJ-Box	<b>SJ-XX**</b>	T-Mount Fitting	<b>TMNT-050-XX**</b>	Mini-Mount	<b>MM-050-XX</b>



### Powder Coat: Standard



### Powder Coat: Specialty



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens



# SP-A STANDARD



Fixture	Lamp	Riser Option	Finish
SP-A <sup>†</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	8R 8" (200 mm)	BZ DG WI FB SB WG*† FW*† AL*† SV*†
		12R 12" (300 mm)	
		18R 18" (450 mm)	
		24R 24" (600 mm)	
		36R 36" (900 mm)	

**ORDERING EXAMPLE:** ▶ SP-A-LED20W-12R-BZ = FIXTURE-LAMP-RISER-FINISH

<sup>†</sup>Includes Super Slot Spike (753900)

## Dimensions

Height: 14.5" (368 mm)<sup>‡</sup>  
 Diameter: 3.6" (91 mm)  
 Riser Diameter: ¾"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Aluminum

ACCESSORIES: Specify Separately


Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	Ground Mount	GM-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000		
VersaBox	VB-050-XX**	Copper Riser with Fittings	YY-R-GT-XX**		



Powder Coat: Standard



Powder Coat: Specialty



<sup>†</sup> Non-returnable

<sup>\*</sup> May require longer lead time <sup>\*\*</sup> Finish code <sup>\*</sup> Total delivered lumens



# C-Line

---

*Our contemporary,* elegant C-Line fixtures are especially at home in coastal environments. That's because they are made with durable, midgrade brass that effectively resists corrosion caused by salty air and dissolved minerals.

*The special brass used in C-Line fixtures costs less than traditional brass. This means you can offer FX Luminaire's premium appeal to a wider range of customers.*



PATH AND DIRECTIONAL LIGHTS



CUL-LED20WFL-AS-AB

Signifies products available for quick delivery



Identifies UL rated products



IP rating indicates water and dust resistance



## C-UL STANDARD PLUS



Fixture	Lamp	Shroud	Finish
C-UL <sup>†</sup>	LED20WFL 180 Lumens* 4.0W/4.3VA	AS Adjustable Shroud	AB
	LED35WFL 250 Lumens* 5.0W/5.4VA		
	NL No Lamp		

**ORDERING EXAMPLE:** ▶ C-UL-LED20WFL-AS-AB = FIXTURE-LAMP-SHROUD-FINISH

<sup>†</sup> Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.6" (168 mm)  
 Diameter: 2.5" (64 mm)  
 Lamp: MR-16  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Mini J-Box	MJ-050-XX**	Post Mount	PM-XX**	ProAim Ratcheting Spike	PARS
VersaBox	VB-050-XX**	Solite Spread (MR-16)	250015240000	Copper Riser with Fittings	YY-R-GT-XX**
SJ-Box	SJ-XX**	Frosted Lens (MR-16)	250015170000	Gutter Mount	GM-SS



C-UL-LED20WFL-AS-AB

## C-WW STANDARD PLUS



Fixture	Lamp	Finish
C-WW <sup>†</sup>	LED35W 170 Lumen Lamp 2.4W/2.6VA	AB

**ORDERING EXAMPLE:** ▶ C-WW-LED35W-AB = FIXTURE-LAMP-FINISH

<sup>†</sup> Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.5" (165 mm)  
 Width: 4.0" (102 mm)  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	ProAim Ratcheting Spike	PARS



C-WW-LED35W-AB

### Metal



<sup>†</sup> Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

## C-WWL STANDARD PLUS



Fixture	Lamp		Finish
C-WWL <sup>†</sup>	LED35WFL	183 Lumens* 5.0W/5.4VA	AB
	LED50WFL	218 Lumens* 6.0W/6.5VA	

**ORDERING EXAMPLE:** ▶ C-WWL-LED50WFL-AB = FIXTURE-LAMP-FINISH

◊ Includes Long Slot Spike (250015840000)

### Dimensions

Height: 6.5" (165 mm)  
Width: 5.4" (137 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Post Mount	PM-XX**	SJ-Box	SJ-XX**	Copper Riser with Fittings	YY-R-GT-XX**
VersaBox	VB-050-XX**	Gutter Mount	GM-SS	ProAim Ratcheting Spike	PARS



## C-IN STANDARD PLUS



Fixture	Lamp		Finish
C-IN	LED35WFL	242 Lumens* 5.0W/5.4VA	AB
	LED50WFL	333 Lumens* 6.0W/6.5VA	

**ORDERING EXAMPLE:** ▶ C-IN-LED35WFL-AB = FIXTURE-LAMP-FINISH

### Dimensions

Length: 5.5" (128 mm)  
Diameter: 3.8" (97 mm)  
Lamp: MR-16  
Lead: 10' (3 m)  
Material: Brass



### Metal



† Non-returnable  
\* May require longer lead time \*\* Finish code \* Total delivered lumens



## C-PL-4 STANDARD PLUS

Fixture	Lamp	Riser Height	Finish
C-PL-4 <sup>†</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	18R 18" (750 mm)	AB

**ORDERING EXAMPLE:** ▶ C-PL-4-LED20W-18R-AB = FIXTURE-LAMP-RISER-FINISH

<sup>†</sup>Includes Long Slot Spike (250015840000)

### Dimensions

Height: 21.0" (523 mm)  
 Diameter: 4.3" (109 mm)  
 Riser Diameter: 1.0"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	VersaBox	VB-050-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000	Ground Mount	GM-XX**



C-PL-4-LED20W-18R-AB



## C-PL-7 STANDARD PLUS

Fixture	Lamp	Riser Height	Finish
C-PL-7 <sup>†</sup>	LED20W 123 Lumen Lamp 1.6W/1.7VA	18R 18" (750 mm)	AB

**ORDERING EXAMPLE:** ▶ C-PL-7-LED20W-18R-AB = FIXTURE-LAMP-RISER-FINISH

<sup>†</sup>Includes Long Slot Spike (250015840000)

### Dimensions

Height: 21.5" (546 mm)  
 Diameter: 6.5" (165 mm)  
 Riser Diameter: 1.0"  
 Lamp: G4  
 Lead: 10' (3 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
SJ-Box	SJ-XX**	VersaBox	VB-050-XX**	ProAim Ratcheting Spike	PARS
Post Mount	PM-XX**	3-Prong Spike	250020020000	Ground Mount	GM-XX**



C-PL-7-LED20W-18R-AB

### Metal



<sup>†</sup> Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens

## C-DL STANDARD PLUS



Fixture	Lamp	Finish
C-DL <sup>◊</sup>	LED20WFL 91 Lumens* 4.0W/4.3VA	AB
	LED35WFL 138 Lumens* 5.0W/5.4VA	
	NL No Lamp	

**ORDERING EXAMPLE:** ▶ C-DL-LED20WFL-AB = FIXTURE-LAMP-FINISH

<sup>◊</sup> Includes wall canopy

### Dimensions

Length: 10.7" (272 mm)  
 Diameter: 2.9" (73 mm)  
 Lamp: MR-16  
 Lead: 26' (8 m)  
 Material: Brass

ACCESSORIES: Specify Separately

Name	Code	Name	Code	Name	Code
Hex Baffle (MR-16)	250015260000	Solite Spread (MR-16)	250015240000	Frosted Lens (MR-16)	250015170000



C-DL-LED20WFL-BZ

## C-LL STANDARD PLUS



Fixture	Lamp	Finish
C-LL	LED20W 151 Lumens* 4.0W/4.2VA	AB

**ORDERING EXAMPLE:** ▶ C-LL-LED20W-AB = FIXTURE-LAMP-FINISH

### Dimensions

Height: 0.8" (19 mm)  
 Width: 6.9" (175 mm)  
 Depth: 0.8" (20 mm)  
 Lamp: Integrated LED  
 Lead: 10' (3 m)  
 Material: Brass



C-LL-LED20W-AB

### Metal



† Non-returnable

\* May require longer lead time \*\* Finish code \* Total delivered lumens



LINE-VOLTAGE SOLUTIONS




Indicates  
line-voltage fixture  
(110V-277V)



Identifies UL rated  
products



Signifies CE or RCM  
certified products

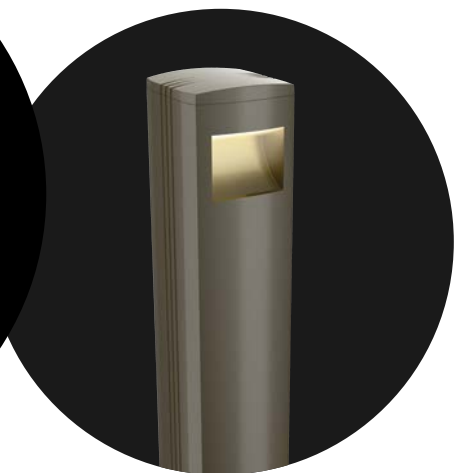





# LINE-VOLTAGE SERIES

---

*With sleek, modern designs* and robust engineering, our Line-Voltage Series provides maximum light output and seamless aesthetics for state-of-the-art installations in any environment.

*Specify your desired control, output, color temperature, and optics with ultimate flexibility and versatility.*

## A-CT LINE VOLTAGE

### DIMENSIONS

Length: 8.5" (216 mm)  
 LS Length: 10.6" (268 mm)  
 Width: 4.0" (102 mm)  
 Material: Aluminum



A-CT4

### DIMENSIONS

Length: 11.5" (293 mm)  
 LS Length: 12.3" (312 mm)  
 Width: 5.0" (127 mm)  
 Material: Aluminum



A-CT5

Fixture	Power/Control	Output	CCT	Optics	Option	Finish	Mounting
<b>A-CT4**</b>	<b>SV</b> 120V Phase (UL)	<b>L07</b> 499-629 Lumens	<b>K27</b> 2,700K	<b>SP</b> 20°	<b>[default]</b>	<b>BZ DG WI</b> <b>SB FB WG</b> <b>FW AL SV</b>	<b>[default]</b> No kit <sup>◊</sup>
<b>A-CT5**</b>	<b>UV</b> 110V-277V 0-10V (CE)	<b>L10</b> 565-867 Lumens	<b>K30</b> 3,000K	<b>FL</b> 40°	<b>LS</b> Long Shroud (not available with VW & WW)		<b>MKCT4<sup>◊◊</sup></b> Required for A-CT4
	<b>HV</b> 220V-240V 0-10V (CE)	<b>L13</b> 824-1,141 Lumens	<b>K40</b> 4,000K	<b>WF</b> 60°			
		<b>L20<sup>◊</sup></b> 1,866 Lumens		<b>VW<sup>◊</sup></b> 90°			
				<b>WW<sup>◊</sup></b> 90° - 120°			

**ORDERING EXAMPLE:** ▶ **A-CT4-SV-L10-K30-FL-FB+MKCT4** = FIXTURE-POWER/CONTROL-OUTPUT-CCT-OPTICS-OPTION-FINISH-MOUNTING

◊ A-CT5 Only ◊◊ A-CT4 Only



## A-BR10 LINE VOLTAGE

Fixture	Power/Control	Output	CCT
<b>A-BR10**</b>	<b>SV</b> 120V Phase (UL)	<b>L07</b> 319-990 Lumens	<b>K27</b> 2,700K
	<b>UV</b> 110V/277V 0-10 (UL)	<b>L10</b> 444-1,347 Lumens	<b>K30</b> 3,000K
	<b>HV</b> 220V/240V 0-10 (CE)	<b>L13</b> 614-1,803 Lumens	<b>K40</b> 4,000K
		<b>L20</b> 988-2,977 Lumens	

### Dimensions

Height: 42.0" (1,050 mm)  
 Width: 9.7" (264 mm)  
 Material: Aluminum

Lens	Orientation	Finish	Mounting
<b>[default]</b> Clear	<b>GP</b> Ground Plane	<b>BZ DG WI SB FB</b> <b>WG FW AL SV</b>	<b>MKBR10</b> - Standard kit
<b>FR</b> Frosted	<b>GG</b> Ground/Ground		
	<b>GV</b> Ground/Vertical		


**ORDERING EXAMPLE:** ▶ **A-BR10-UV-L13-K27-FR-GP-BZ+MKBR10** = FIXTURE-POWER/CONTROL-OUTPUT-CCT-LENS-ORIENTATION-FINISH-MOUNTING



Powder Coat: Standard



Powder Coat: Specialty



+ Non-returnable \* May require longer lead time

## A-ST5 **LINE VOLTAGE**



Fixture	Power/Control	Output	CCT	Optics	Finish
<b>A-ST5*</b>	<b>SV</b> 120V Phase (UL)	<b>L07</b> 569-645 Lumens	<b>K27</b> 2,700K	<b>SP</b> 20°	<b>BZ DG WI SB FB WG FW AL SV</b>
	<b>UV</b> 110V/277V 0-10 (UL)	<b>L10</b> 824-895 Lumens	<b>K30</b> 3,000K	<b>FL</b> 40°	<b>FW AL SV</b>
		<b>L13</b> 1,069-1,161 Lumens	<b>K40</b> 4,000K	<b>WF</b> 60°	
		<b>L20</b> 1,682-1,836 Lumens			

**ORDERING EXAMPLE:** ▶ **A-ST5-SV-L10-K30-FL-FW** = FIXTURE-POWER/CONTROL-OUTPUT-CCT-OPTICS-FINISH



### Dimensions

Height: 11.5" (293 mm)  
Width: 5.0" (127 mm)  
Material: Aluminum

## A-NK **LINE VOLTAGE**

### DIMENSIONS

Length: 5.8" (147 mm)  
Width: 5.8" (147 mm)  
Exposed Depth: 0.125" (3.2 mm)  
Material: Aluminum



**A-NK4**

### DIMENSIONS

Length: 11.2" (285 mm)  
Width: 11.2" (285 mm)  
Exposed Depth: 0.125" (3.2 mm)  
Material: Aluminum



**A-NK6**

Fixture	Power/Control	Output	CCT	Lens	Finish	Mounting
<b>A-NK4**</b>	<b>SV</b> °° 120V Phase (UL)	<b>L04</b> 205-311 Lumens	<b>K30</b> 3,000K	<b>[default]</b> °° Clear	<b>BZ DG WI SB FB WG FW AL SV</b>	<b>MKNK4</b> °°
<b>A-NK6**</b>	<b>UV</b> 110V-277V 0-10V (UL)	<b>L10</b> °° 550-688 Lumens	<b>K40</b> 4,000K	<b>FR</b> Frosted		<b>MKNK6</b> °°
	<b>HV</b> °° 220V-240V 0-10V (CE)	<b>L13</b> °° 749-930 Lumens				
		<b>L20</b> °° 1,162-1,491 Lumens				

**ORDERING EXAMPLE:** ▶ **A-NK4-SV-L04-K30-SV+MKNK4** = FIXTURE-POWER/CONTROL-OUTPUT-CCT-LENS-FINISH-MOUNTING


°° A-NK4 Only °°° A-NK6 Only



### Powder Coat: Standard



### Powder Coat: Specialty



+ Non-returnable \* May require longer lead time

## A-HS LINE VOLTAGE



Fixture	Power/Control	Output	CCT
A-HS*†	UV 110V/277V 0-10 (UL)	L06 531 Lumens	K30 3,000K
		L11 944 Lumens	K40 4,000K

### Dimensions

Height: 2.3" (58 mm)  
 Width: 8.0" (203 mm)  
 Depth: 3.4" (86 mm)  
 Exposed Depth: 0.7" (18 mm)  
 Material: Aluminum

Optics	Faceplate	Finish	Mounting
FG Floor Gaze	LS Long Shroud	BZ DG WI SB FB WG FW AL SV	MKHS - Standard kit
PW Performance Wash			

**ORDERING EXAMPLE:** ▶ A-HS-UV-L06-K30-FG-LS-FB+MKHS = FIXTURE-POWER/CONTROL-OUTPUT-CCT-OPTICS-FACEPLATE-FINISH-MOUNTING



## A-KN LINE VOLTAGE



Fixture	Power/Control	Output	CCT	
A-KN*†	120V/160Hz Phase (UL)	L07 646 Lumens	K27 2,700K	
		UV 110V/277V 0-10 (UL)	L10 889 Lumens	K30 3,000K
		HV 220V/240V 0-10 (CE)	L13 1,159 Lumens	K40 4,000K
			L20 1,871 Lumens	

### Dimensions

Height: 15.7" (399 mm)  
 Diameter: 10.5" (267 mm)  
 Material: Aluminum

Optics	Option	Finish	Mounting
SP 20°	[default] Ring	BZ DG WI SB FB WG FW AL SV	MKKN - Standard kit
FL 40°	CW Cowling		
WF 60°	SR Slip-Resistant		


**ORDERING EXAMPLE:** ▶ A-KN-UV-L20-K40-SP-SR-BZ+MKKN = FIXTURE-POWER/CONTROL-OUTPUT-CCT-OPTICS-OPTION-FINISH-MOUNTING




Powder Coat: Standard



Powder Coat: Specialty



† Non-returnable \* May require longer lead time



*Push the boundaries of creative  
and functional lighting design with  
the FX Luminaire Line-Voltage Series.*



# LUXOR® SYSTEM

Zoning, Dimming & 30,000 Colors

---

*When Luxor technology* controls an LED landscape lighting system, lights don't simply turn on and off. They come alive. As FX Luminaire's premium lighting control option, Luxor is the most advanced and flexible low-voltage landscape lighting transformer on the market. The controller combines zoning, dimming, and color control capabilities into a single control system using a simple two-wire path installation.

*With Luxor, you can create a range of vibrant lighting designs to offer distinctive looks year-round.*



THE LUXOR APP PROVIDES  
MAXIMUM FLEXIBILITY  
AND CONVENIENCE —  
RIGHT FROM THE PALM  
OF YOUR HAND.




# LUXOR

## Zoning and Dimming + Color

**Zoning and Dimming** Zoning allows lights to be programmed into preset groups. Dimming allows lights to be set at different intensities from 0-100%.



**Color** Choose from a spectrum of 30,000 vibrant possibilities.

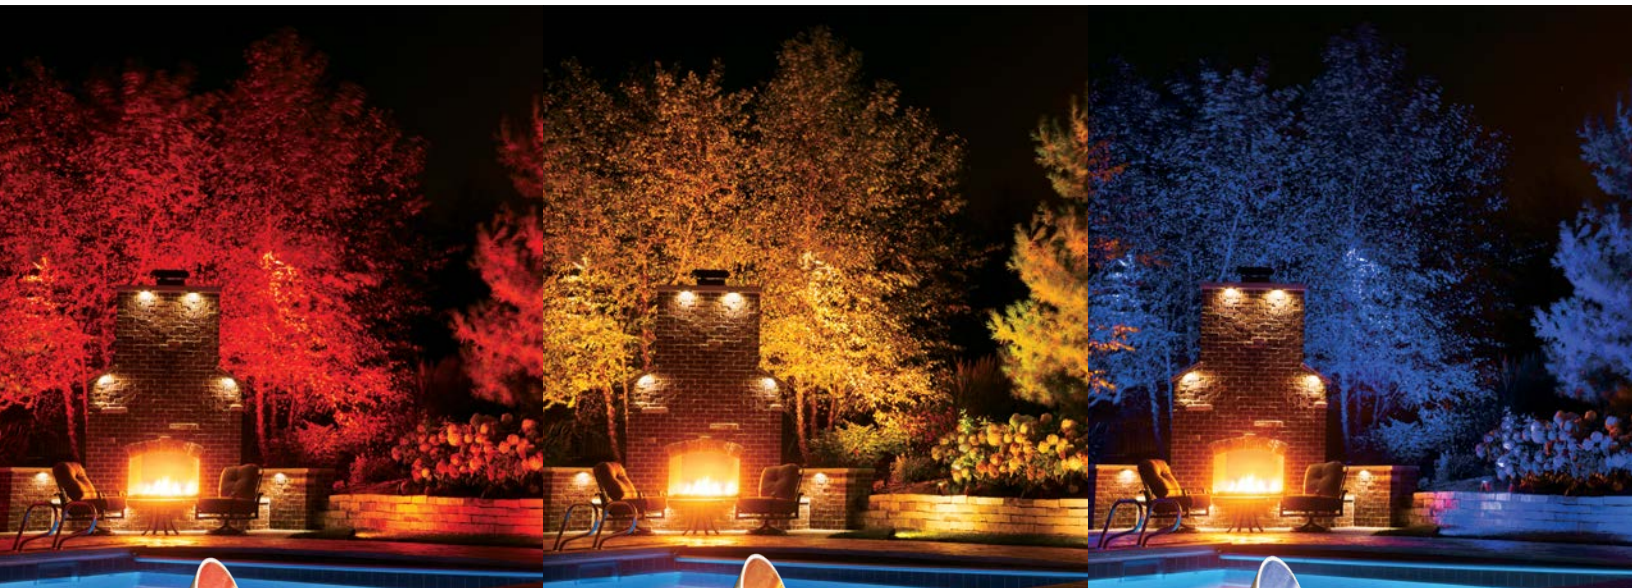

▲ RED	
HUE	350
SATURATION	96%
INTENSITY	90%






















▲ AMBER	
HUE	42
SATURATION	38%
INTENSITY	75%



▲ BLUE	
HUE	230
SATURATION	81%
INTENSITY	63%



# Luxor Compatible Color-Changing Fixtures

					
<b>FB</b> <i>See page 15</i>	<b>NP</b> <i>See page 15</i>	<b>FR   NR</b> <i>See page 16</i>	<b>VS   CC</b> <i>See page 17</i>	<b>PB</b> <i>See page 19</i>	<b>LC</b> <i>See page 19</i>
					
<b>CA</b> <i>See page 24</i>	<b>CV</b> <i>See page 24</i>	<b>DM</b> <i>See page 24</i>	<b>JS</b> <i>See page 24</i>	<b>RW</b> <i>See page 27</i>	<b>PL   TM</b> <i>See page 25</i>
					
<b>FG</b> <i>See page 26</i>	<b>TD</b> <i>See page 26</i>	<b>LL</b> <i>See page 53</i>	<b>LP</b> <i>See page 53</i>	<b>MO</b> <i>See page 38</i>	<b>SL</b> <i>See page 38</i>
					
<b>LF</b> <i>See page 33</i>	<b>PM</b> <i>See page 72</i>	<b>M-PL</b> <i>See page 29</i>	<b>M-PK</b> <i>See page 28</i>	<b>M-PZ</b> <i>See page 29</i>	<b>M-PJ</b> <i>See page 28</i>
					
<b>NL</b> <i>See page 46</i>	<b>PS</b> <i>See page 46</i>	<b>SD</b> <i>See page 42</i>	<b>DE</b> <i>See page 44</i>	<b>JB</b> <i>See page 43</i>	<b>ZW</b> <i>See page 41</i>
					
<b>VE</b> <i>See page 45</i>	<b>RC</b> <i>See page 42</i>	<b>KT</b> <i>See page 52</i>	<b>KG</b> <i>See page 51</i>	<b>FC</b> <i>See page 51</i>	<b>HP-48</b> <i>See page 52</i>

# LUXOR Controllers



## LUXOR AND LSAT CONTROLLERS



WITH LUXOR LINKING,  
YOU CAN WIRE LSAT  
CONTROLLERS UP TO  
3,000' (900 M)  
AWAY FROM THE PRIMARY  
CONTROLLER.



---

*In addition to incorporating* zoning, dimming, and color into a single controller, Luxor can now create up to 40 distinct themes, and comes preset with convenient calendar-based programming, timed sunrise and sunrise offsets, dual 15V outputs, and optional wireless control.

*With Luxor Linking, you can hardwire up to nine LSAT, or satellite, controllers while maintaining a single point of control.*



## LUXOR Features

*With complete zoning, dimming, and color generation capabilities — along with optional Wi-Fi control — the Luxor lighting system offers unsurpassed freedom and flexibility for outdoor lighting design.*

### Primary Features

- Zone control: Turn individual or groups of fixtures on and off at desired times
- Dimming control: Adjust the intensities of individual or groups of fixtures from 0–100%
- Color control: Create 30,000 colors for maximum design potential
- Color palette: Generate and save up to 250 custom colors
- Astronomical timing: Automatically track sunset and sunrise timing by setting your location
- Scene/theme creation: Design up to 40 themes ranging from every-night living to holidays and special celebrations
- Event-based programming: Turn custom themes or lighting fixtures on and off multiple times throughout the night
- Calendar-based programming: Ensure specific programs run only when needed with dedicated date-range programming
- Wireless control: Interact with the controller using iOS® and Android™ devices
- LAN connection: Conveniently incorporate wireless control using the preinstalled LAN module
- Smart home integration: Integrate and control Luxor using today's most popular smart home automation systems



iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. Android is a trademark of Google LLC.



LUXOR



LSAT

**Dimensions**

Height: 13.0" (330 mm)  
 Width: 8.0" (203 mm)  
 Depth: 5.0" (127 mm)  
 EU Depth: 6.3" (160 mm)

Controller	Wattage	Compliance	Finish
LUX (Primary)	150 150W	[blank] 120V	SS M
LSAT (Satellite, 300W only)	300 300W	e 230V	
		EU 230V CE	

**ORDERING EXAMPLE:** ▶ LUX-300-SS = CONTROLLER-WATTAGE-FINISH

# LUXOR LINKING

With **Luxor Linking**, users can hardwire up to nine Luxor Satellite controllers, while maintaining a single point of control. The addition of Luxor Satellite controllers improves Wi-Fi connectivity and adds simplicity to lighting design.



User-Installed Options (order separately)



Wi-Fi Module allows wireless communication to the Luxor controller

Wirelessly assign fixtures with the Lighting Assignment Module (LAM)

Code	Description
WIFIMOD2	Wi-Fi Module
WIFIMOD2RMT	Wi-Fi Module Remote Mount, Wire Lead 10' (3 m)
LAM	Lighting Assignment Module



Metal | Powder Coat: Standard

SS

M

# LUXOR Accessories




**ZD MR-16**

## Upgrade any system with **ZD MR-16**

*The ZD MR-16 is a convenient, high-quality retrofit LED replacement lamp* that converts incandescent fixtures to energy-efficient LED fixtures. When connected to a Luxor controller, the ZD MR-16 adds zoning, dimming, and Wi-Fi control capabilities to any brand of low-voltage lighting fixture — and it carries a five-year warranty.

MODEL CONFIGURATION:

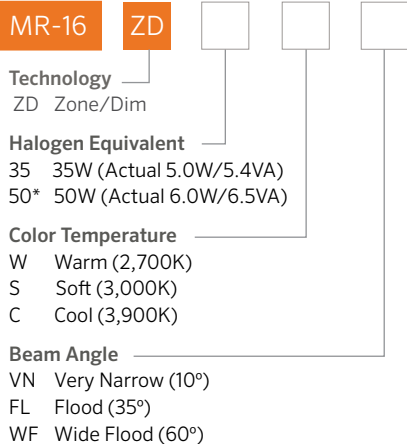

Lamp	Output Equiv	Color Temp	Beam Angle
<b>MR-16 ZD</b>	<b>35</b> 35W	<b>W</b> Warm (2,700K)	<b>VN</b> Very Narrow (10°)
	<b>50*</b> 50W	<b>S</b> Soft (3,000K)	<b>FL</b> Flood (35°)
		<b>C</b> Cool (3,900K)	<b>WF</b> Wide Flood (60°)

**EXAMPLE:** LAMP-WATT-TEMPERATURE-BEAM ANGLE ▶ **MR16-ZD-35-W-VN**

\*Title 20 compliant





LOW-VOLTAGE FIXTURES



LINE-VOLTAGE FIXTURES



OUTDOOR ELEMENTS

## LUXOR CUBE offers total control for outdoor living spaces

*With the Luxor CUBE, the Luxor controller can zone and dim other brands of low- and line-voltage lighting fixtures. In addition to controlling carriage, entry pillar, and holiday or bistro lights, the CUBE even allows control of water pumps, automatic gates, and any device with a relay input.*

TYPE	MODEL NO.	MAX LOAD	SUPPORTS*	NOTES
Low-Voltage	LCM-LV	60W/5A	AC Dimmable LEDs	
			Incandescent	Alternate LV Power Source Required
Line-Voltage	LCM-HV	400W/3.3A	AC Lighting (Dimmable LED and Incandescent)	Alternate HV Power Source Required
Relay/0-10V	LCM-RLY-010V	250VAC/5A	Relay Switch	

### LUXOR CUBE MODELS



Low-Voltage **LCM-LV**



Line-Voltage **LCM-HV**



Relay **LCM-RLY-010V**

\* See installation instructions for restrictions and advisory information

# LUXOR App Control



The Luxor app provides ultimate flexibility and convenience when designing with Luxor lighting systems. With the app, you can adjust fixture intensity and color, create unique themes, and fine-tune your color palette for special occasions — right from the palm of your hand!

## Programming/Schedule



Create custom lighting schedules for everyday living, holidays, and celebrations. Event-based programming initiates custom themes or individual lighting fixtures throughout the night.

## Color Creation



The Luxor controller provides the ability to create up to 30,000 colors using the latest RGBW LED technology. Use the color bars to select the desired hue, saturation level, and intensity for any light or group of lights. You can also create a personalized palette to easily access up to 250 user-saved color options.

## Groups



Adjust intensity and colors (ZDC fixtures only) of individual or groups of fixtures to fine-tune your lighting design. With a Luxor system, you can create up to 250 adjustable lighting groups that can be turned on independently and dimmed from 1-100%.

## Themes



With Luxor ZDC technology, you can liven up your home to complement any occasion through industry-leading custom color creation capabilities. Design one-of-a-kind holiday displays, create team spirit for the big game, add company colors for work-related events, or simply adjust colors to match vegetation as the seasons change.





*Adjust intensity and color, create unique themes, and fine-tune your color palette for special occasions with the Luxor app.*



# TRANSFORMERS and Controllers

---

*When you choose* an FX Luminaire lighting system, you get the very latest landscape lighting technology, including the highest-quality transformers, no matter your budget.

*From intermediate to advanced control options, our transformers offer unsurpassed freedom, flexibility, and performance to elevate any outdoor living space.*



*FX Luminaire lighting controllers and accessories provide comprehensive lighting control options for standard installations.*



## EX

Transformer	Wattage	Compliance	Finish
EX	150	[Blank]	120V SS M
		e	230V
		230V (M finish only)	

**ORDERING EXAMPLE:** ▶ **EX150-M** = CONTROLLER-FINISH

### Dimensions

Height: 13.0" (330 mm)  
 Width: 5.5" (140mm)  
 Depth: 5.0" (127 mm)

ACCESSORIES: Specify Separately

Name	Code
EXPC	EX Photocell
PXTIMER	PX Timer
PXSYNC	Lighting Synchronizer for 24V Irrigation Controllers
SURGEMOD	Surge Module



## DX



Controller	Wattage	Finish
DX	150	SS M
	300	

**ORDERING EXAMPLE:** ▶ **DX150-SS** = CONTROLLER-FINISH

### Dimensions

Height: 11.4" (289 mm)  
 Width: 7.1" (181 mm)  
 Depth: 5.0" (128 mm)

ACCESSORIES: Specify Separately

Item	Description
DXFP	DX Facepack
LXBATT9V	9V Battery Adapter
SURGEMOD	Surge Module



Powder Coat: Standard



Metal



# PX



Transformer	Wattage	Switching Option	Finish
PX	300	PC Photocell	SS BZ DG WI SB FB WG*† FW*† AL*† SV
	600	T Timer	
	900	TPC Timer/Photocell	

**ORDERING EXAMPLE:** ▶ PX600-PC-SS = CONTROLLER-SWITCHING OPTION-FINISH

## Dimensions

Height:  
 300 & 600 W: 13.5" (343 mm)  
 900 W: 16.5" (419 mm)  
 Width: 7.5" (191 mm)  
 Depth: 6.0" (152 mm)

ACCESSORIES: Specify Separately


Item	Description	Item	Description
PXSYNC	Lighting Synchronizer for 24V Irrigation Controllers	PXPC	PX Photocell
PXTIMER	PX Timer	SURGEMOD	Surge Module
PXPC	PX Photocell		



## Powder Coat: Standard



## Powder Coat: Specialty



## Metal



† Non-returnable \* May require longer lead time

# LAMPS

## MR-16 and G4



---

*With our complete line* of high-efficiency MR-16 and G4 LED lamps, you get more choices for maximum lighting design flexibility. Lamps are available pre-installed in all FX Luminaire Standard Series fixtures.

*The 50W MR-16 lamps are fully compliant with California's strict Title 20 requirements to reduce electricity consumption.*



MR-16 LAMPS ARE AVAILABLE IN HIGH-EFFICIENCY MODELS RANGING FROM 20-50W EQUIVALENTS.

G4 LAMPS PROVIDE A UNIFORM LIGHT DISTRIBUTION ACROSS A RANGE OF BEAM SPREADS.

MR-16 AND G4 LAMPS





## MR-16 LED Lamp

The MR-16 LED is a convenient, energy-saving lamp with the high quality you expect from FX Luminaire. It is available in three intensities, three beam angle options, and three color temperatures. Fully potted, it carries a five-year warranty.

### MR-16 LED

MODEL CONFIGURATION: \_\_\_\_\_

**MR-16** **LED**

**Halogen Equivalent**

- 20 20W (Actual 4.0W/4.3VA)
- 35 35W (Actual 5.0W/5.4VA)
- 50\* 50W (Actual 6.0W/6.5VA)

**Color Temperature**

- W Warm (2,700K)
- S Soft (3,000K)
- C Cool (3,900K)

**Beam Angle**

- VN Very Narrow (10°)
- FL Flood (35°)
- WF Wide Flood (60°)

Lamp	Output Equiv	Color Temp	Beam Angle
MR-16 LED 20	20W	W Warm (2,700K)	VN Very Narrow (10°)
35	35W	S Soft (3,000K)	FL Flood (35°)
50*	50W	C Cool (3,900K)	WF Wide Flood (60°)

**EXAMPLE:** LAMP-WATT-TEMPERATURE-BEAM ANGLE ▶ **MR16-LED-20-W-VN**  
\*Title 20 compliant








## MR-16 Eco Lamp

The MR-16 Eco LED lamp family provides an economical choice for lighting professionals. To simplify product selection, the lamps are available with two outputs, two beam angles, and one color temperature option.

### MR-16 Eco

MODEL CONFIGURATION: \_\_\_\_\_

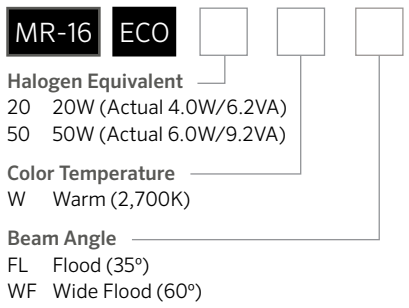

Lamp	Output Equiv	Color Temp	Beam Angle
<b>MR-16 ECO</b>	<b>20</b> 20W	<b>W</b> Warm (2,700K)	<b>FL</b> Flood (35°)
	<b>50</b> 50W		<b>WF</b> Wide Flood (60°)

**EXAMPLE:** LAMP-WATT-TEMPERATURE-BEAM ANGLE ▶ **MR16-ECO-20-W-FL**





## G4 LED

## G4 LED Lamp

Specially developed with a clear silicone capsule design, the G4 LED replacement lamp combines the reliability of FX Luminaire with the convenience of three intensities. The G4 LED features a warm 2,700K color temperature and carries a five-year warranty.

MODEL CONFIGURATION: \_\_\_\_\_



Halogen Equivalent

10 10W (Actual 1.0W/1.1A)  
 20 20W (Actual 1.6W/1.7VA)  
 35 35W (Actual 2.4W/2.6VA)

Color Temperature

W Warm (2,700K)

Lamp	Output Equiv	Color Temp
<b>G4 LED</b>	<b>10</b> 10W	<b>W</b> Warm (2,700K)
	<b>20</b> 20W	
	<b>35</b> 35W	

EXAMPLE: LAMP-WATT-TEMPERATURE ▶ **G4-LED-20-W**





*FX Luminaire lamps offer a wide range of output, beam angle, and color temperature options.*



---

*At FX Luminaire,* we pride ourselves in providing our customers with highly detailed technical information and useful tools to make even the most complex projects simple, seamless, and straightforward.

*From comprehensive photometrics data charts to our handy finish guide, we have the information you need to create world-class lighting designs in every installation.*



# TECHNICAL DATA

## Finishes, Photometrics, and Lighting



---

FX LUMINAIRE FIXTURES  
ARE FIELD ADJUSTABLE,  
SERVICEABLE, AND  
UPGRADEABLE.

---

BUILT-IN OPTICS  
PLATFORMS PROVIDE A  
SIMPLE CONFIGURATION  
FOR ADJUSTING COLOR  
TEMPERATURE AND  
BEAM ANGLE SPREADS.

---

ALL FX LUMINAIRE LED  
SYSTEMS ARE CAREFULLY  
ENGINEERED FOR OPTIMAL  
PERFORMANCE ACROSS A  
RANGE OF APPLICATIONS.

---

# FX LUMINAIRE Finishes


---

## Metal


---



**AB on copper**  
Antique Bronze



**AB on brass**  
Antique Bronze



**AT on copper**  
Antique Tumbled



**AT on brass**  
Antique Tumbled




**CU**  
Copper



**NP**  
Nickel Plate



**BS**  
Natural Brass



**SS**  
Stainless Steel

## Powder Coat: Standard


---



**BZ**  
Bronze Metallic




**DG**  
Desert Granite



**WI**  
Weathered Iron



**SB**  
Sedona Brown



**FB**  
Black



**M**  
Matte Gray  
(Select transformers only)

## Powder Coat: Specialty

---



**WG**  
White Gloss



**FW**  
Flat White



**AL**  
Almond



**SV**  
Silver  
(Select fixtures only)

## Composite


---



**CB**  
Camo Bronze



**DT**  
Desert Tan



**DS**  
Dark Slate

# FX LUMINAIRE Photometrics

Use our photometrics charts to make the most of your lighting design. The charts help with ideal fixture spacing by illustrating light intensity at variable distances. Visit the product pages at [fxl.com](http://fxl.com) for photometric charts specific to each fixture.

Mounting height or distance from illuminated surface

## MS 1LED ILLUMINANCE AT DISTANCE

This column is the forward throw of the light


Mounting height or distance from illuminated surface	Center Beam	Beam Width	
		Horizontal (92°)	Vertical (85°)
2.0' (0.6 m)	11.6 fc (125.3 lux)	3.6' (1.1 m)	4.1' (1.2 m)
4.0' (1.2 m)	2.9 fc (31.3 lux)	7.3' (2.2 m)	8.2' (2.5 m)
6.0' (1.8 m)	1.3 fc (14 lux)	10.9' (3.3 m)	12.3' (3.7 m)
8.0' (2.4 m)	0.5 fc (5.4 lux)	14.6' (4.5 m)	16.4' (4.9 m)
10.0' (3.0 m)	0.3 fc (3.2 lux)	18.2' (5.5 m)	20.5' (6.2 m)

Foot-candles (or lux) measure light output density at a given point


Horizontal Spread  
Vertical Spread

Sideways spread of the beam

### HORIZONTAL AND VERTICAL THROW OF LIGHT (TOP VIEW)

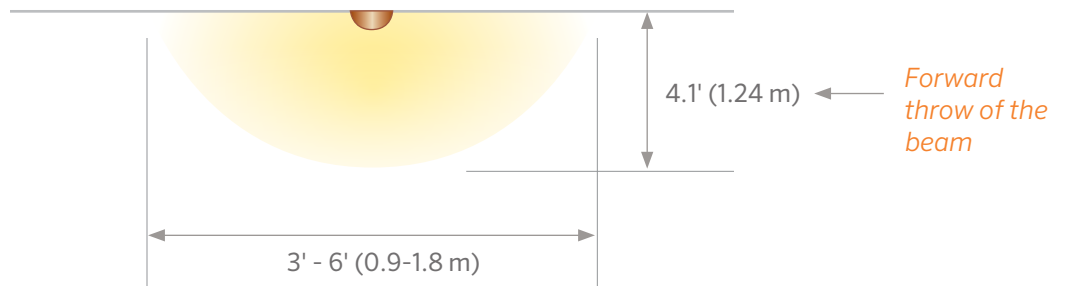

### HORIZONTAL THROW OF LIGHT (FRONT VIEW)

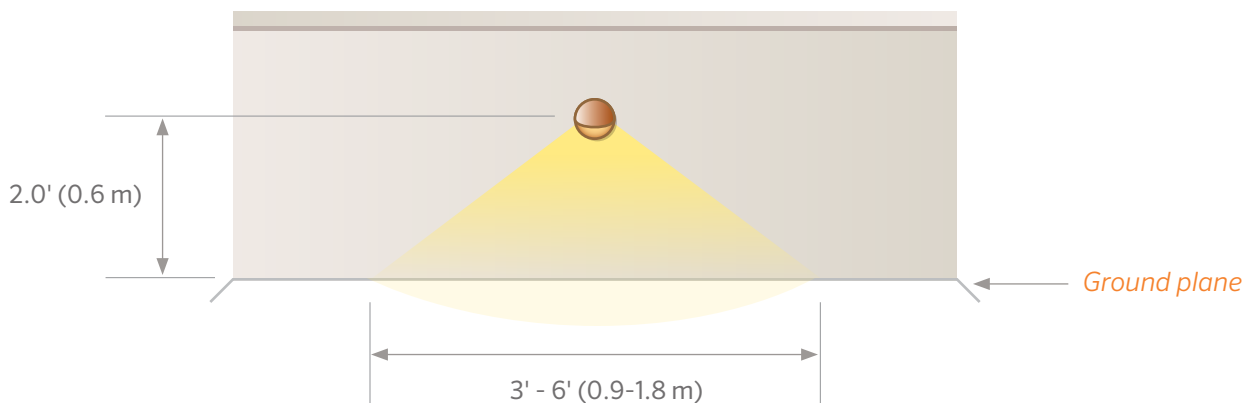




Control  
*Luxor shown*



Up Lights  
*NP shown*




Path Lights  
*CA shown*



Wall Lights  
*LF shown*



Down Lights  
*JB shown*



Wall Wash  
*PB shown*


## Intensity




10%



33%



66%




100%

## Look on the *Bright Side*


With Luxor technology, up to 250 independently adjustable lighting groups can be created with fixtures that have a 1, 3, 6, or 9 LED capacity. All groups can be turned on independently and dimmed from 1-100%.

## Color Temperature




5,200K

BLUE




2,700K

AMBER

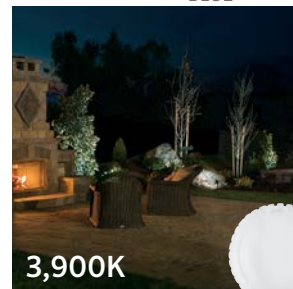

3,900K

CLEAR




4,500K

GREEN

## A Spectrum of *Possibilities*


Adjust color temperature filters to match vegetation and architecture for distinctive looks year round. The Luxor provides the ability to create 30,000 colors using the latest LED technology.

## Beam Spread




Very Narrow

10°




Spot

20°



Flood

35°

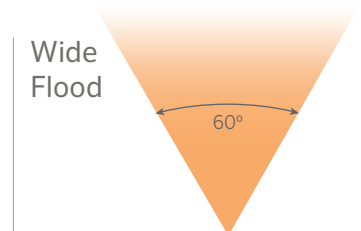

Wide Flood

60°

All the Right *Angles* FX Luminaire integrated LEDs offer many beam angle options for maximum lighting design flexibility.

Adjust to your preference using very narrow, spot, flood, or wide flood lenses ranging from 10° to 60°.





## STOP INGRESS IN ITS TRACKS WITH **MoistureBlock™**

Over time, lighting fixtures can experience moisture ingress through the cable entry. As the lamp heats up, air inside the fixture expands and is forced into the cable. When the lamp cools after the fixture is turned off, the air contracts and creates suction inside the fixture and the cable. This causes moisture ingress, which can lead to internal corrosion and electrical failure.


*FX Luminaire fixtures have built-in, 100% watertight MoistureBlock technology to maximize the longevity of every lighting installation.*

Sockets with MoistureBlock



EXTERIOR SEALS

CHEMICAL BONDING AGENTS

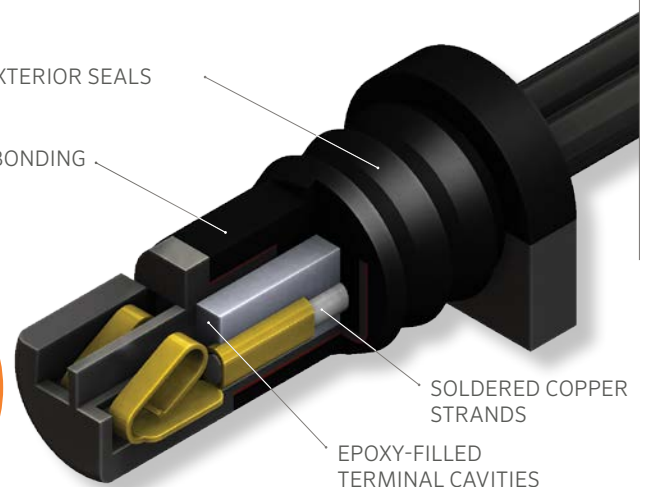

SOLDERED COPPER STRANDS

EPOXY-FILLED TERMINAL CAVITIES

# ACCESSORIES

and Replacement Parts



SPIKES, LED BOARDS, AND MOUNTS





*EX Luminaire* offers an assortment of accessories to enhance your lighting design. From spikes and risers to mounting kits, lenses, splicing options, and more, we have the accessories you need to transform your vision into reality.

*Our mounting options include surface mounts such as junction boxes and wall plates, ground mounts such as conduits and spikes, and a range of couplers and risers.*

## DESIGNER SERIES Replacement Kits



LED REPLACEMENT KITS

Order No.	Description
<b>1LEDULKIT</b>	1 LED Replacement Kit <sup>†</sup>
<b>3LEDULKIT</b>	3 LED Replacement Kit <sup>†</sup>
<b>6LEDULKIT</b>	6 LED Replacement Kit <sup>†</sup>
<b>9LEDULKIT</b>	9 LED Replacement Kit <sup>†</sup>
<b>755903</b>	1 LED board for LF (Warm, 2,700K)*
<b>755904</b>	1 LED board for LF (Cool, 3,900K)*

Includes Filters, Screws, Reflectors, and LED Board

## ZDC DESIGNER SERIES Replacement Kits

Order No.	Description
<b>ZDCKITL</b>	ZDC Replacement Kit (Large)
<b>ZDCKITM</b>	ZDC Replacement Kit (Medium)
<b>ZDCKITR</b>	ZDC Replacement Kit (Rectangular)*

Fixture Kit includes Board, Reflector, Diffuser, and Lens Cap with Frosted Lens

## DESIGNER SERIES Optics Kits



LED OPTICS

Order No.	Description
<b>1LED OPTICKIT</b>	Optics Kit for 1LED Board
<b>3LED OPTICKIT</b>	Optics Kit for 3LED Board
<b>9LED OPTICKIT</b>	Optics Kit for 9LED Board

## DESIGNER SERIES Beam Angle Lens



BEAM ANGLE LENS

Order No.	Description
<b>1LEDFLENS</b>	1 LED Flood Lens, 30°-32°
<b>1LEDWFLENS</b>	1 LED Wide Flood Lens, 56°-58°
<b>3LEDFLENS</b>	3 LED Flood Lens, 30°-32°
<b>3LEDWFLENS</b>	3 LED Wide Flood Lens, 56°-58°
<b>9LEDFLENS</b>	6 and 9 LED Flood Lens, 30°-32°
<b>9LEDWFLENS</b>	6 and 9 LED Wide Flood Lens, 56°-58°

## ZD DESIGNER SERIES Replacement Kits

Order No.	Description
<b>ZD1LEDULKIT</b>	ZD 1 LED Replacement Kit <sup>†</sup>
<b>ZD3LEDULKIT</b>	ZD 3 LED Replacement Kit <sup>†</sup>
<b>ZD3LEDTKIT</b>	ZD 3LED Wildlife-friendly Replacement Kit
<b>ZD6LEDULKIT</b>	ZD 6 LED Replacement Kit <sup>†</sup>
<b>ZD9LEDULKIT</b>	ZD 9 LED Replacement Kit <sup>†</sup>
<b>755905</b>	ZD 1 LED board for LF (Warm, 2,700K)*
<b>755906</b>	ZD 1 LED board for LF (Cool, 3,900K)*

Includes Filters, Screws, Reflectors, and LED Board

## COLOR Filters

Order No.	Description
<b>250015170000</b>	Frosted Lens for MR-16
<b>250010480000</b>	Frosted Lens for MR-11
<b>250015240000</b>	Solite Spread for MR-16
<b>250015420000</b>	Solite Spread for MR-11
<b>250013550000</b>	Spread Lens for MR-16
<b>250015160000</b>	Spread Lens for CG
<b>250015260000</b>	Hex Baffle for MR-16
<b>250015250000</b>	Hex Baffle for MR-11
<b>RRMR16</b>	Recessor Ring for MR-16
<b>250015180000</b>	Color Filter for MR-16 Light Green
<b>250015190000</b>	Color Filter for MR-16 Light Blue
<b>250015230000</b>	Color Filter for MR-16 Dichroic Peach
<b>250015200000</b>	Color Filter for MR-16 Dichroic Blue
<b>250015210000</b>	Color Filter for MR-16 Dichroic Green
<b>250015220000</b>	Color Filter for MR-16 Dichroic Red
<b>250010140000</b>	Color Filter for MR-11 Dichroic Peach
<b>250010160000</b>	Color Filter for MR-11 Dichroic Blue



HEX BAFFLES



RECESSOR RINGS



COLOR FILTERS

<sup>†</sup>Can be used in down lights \*Board only

\*May require longer lead time \*\* Denotes powder coat finish

## MOUNTING Options



Order No.	Description
<b>POST AND DECK MOUNTS</b>	
<b>PM-XX**</b>	Post Mount
<b>PDM-XX**</b>	Deck Mount for PM
<b>GM-XX**</b>	Ground Mount
<b>VERSABOX</b>	
<b>VB-050-XX**</b>	VersaBox for 1/2" Thread
<b>VB-TS-XX**</b>	VersaBox for TS
<b>MINI J-BOX</b>	
<b>MJ-050-XX**</b>	Mini J-Box for 1/2" Thread
<b>MJ-TS-XX**</b>	Mini J-Box for TS
<b>GUTTER MOUNT</b>	
<b>GM-SS</b>	Gutter Mount for 1/2" Thread Accent Lights
<b>TREEBOX MOUNT</b>	
<b>TB-XX**</b>	TreeBox with 1/2" thread
<b>IN-GRADE</b>	
<b>LG-NF</b>	Light Guard

## POWER Accessories

Catalog No.	Description
<b>MT-6W</b>	Mini Plug-in Transformer, 6W
<b>MT-30W</b>	Mini Plug-in Transformer, 30W
<b>ST-UV</b>	Step-Down Transformer, Universal Voltage (110-277V) to 12V
<b>ST-120-DIM</b>	Step-Down Transformer, Dimmable, 60W, 120V to 12V
<b>SURGE-MOD</b>	Surge Protection for LED Lighting Fixtures

<sup>†</sup>Can be used in down lights <sup>\*</sup>Board only

<sup>\*</sup>May require longer lead time <sup>\*\*</sup>Denotes powder coat finish

## MOUNTING Options (cont.)



Order No.	Description
<b>SPIKES</b>	
<b>753900</b>	Super Slot Spike
<b>250015840000</b>	Long Slot Spike
<b>SJ-XX**</b>	Super J-Box Spike
<b>250011560000</b>	CDS Spike
<b>250020020000</b>	3-Prong Spike
<b>PARS</b>	ProAim Ratcheting Spike
<b>EKITSPIKE</b>	Junction Box Spike Kit
<b>WALL MOUNTS</b>	
<b>POBRKT</b>	PO Mounting Bracket
<b>MOBRKT</b>	MO Mounting Bracket
<b>MM-050-XX**</b>	Mini-Mount
<b>WM-XX**</b>	Wall Mount Knuckle
<b>WP-1G-050-XX**</b>	Wall Plate, 1-Gang, 1/2" Thread
<b>WP-RD-050-XX**</b>	Wall Plate, Round, 1/2" Thread
<b>WP-2G-NL-XX**</b>	Wall Plate, 2-Gang, NL Surface Mount Wall Light
<b>WP-RD-PS-XX**</b>	Wall Plate, Round, PS Surface Mount Down Light
<b>EKITWALL</b>	Wall Light Connection Kit

## SPLICING Options



Order No.	Description
<b>DBRY100</b>	100 tubes loose in box, plus inner box with 100 wire nuts (100 bulk)
<b>DBRY2X25</b>	Two tubes and wire nuts in a plastic bag (2-pack of 25 units)
<b>WCHSBS2</b>	Brass Lug Connectors with Allen key and heat shrink wrap (2-pack)
<b>WCHSBS50</b>	Brass Lug Connectors with Allen key and heat shrink wrap, 50 pcs loose in box (50 bulk, bulk)

<sup>†</sup>Can be used in down lights <sup>\*</sup>Board only

<sup>\*</sup>May require longer lead time <sup>\*\*</sup>Denotes powder coat finish

## ALUMINUM RISER Options



Riser	Faceplate Option	Finish
<b>6R</b>	6" (150 mm) [blank]	Riser Only
<b>8R</b>	8" (200 mm) <b>COUP</b>	Straight Coupling
<b>12R</b>	12" (300 mm) <b>90</b>	90° Coupling
<b>18R</b>	18" (450 mm) <b>T</b>	T Coupling
<b>24R</b>	24" (600 mm)	
<b>30R</b>	30" (750 mm)	
<b>36R</b>	36" (900 mm)	

**ORDERING EXAMPLE:** ▶ **12R-COUP-BZ** = RISER HEIGHT-OPTION-FINISH

## COPPER RISER Options



Riser	Finish
<b>8R-GT</b>	8" (200 mm)
<b>12R-GT</b>	12" (300 mm)
<b>18R-GT</b>	18" (450 mm)
<b>24R-GT</b>	24" (600 mm)

**ORDERING EXAMPLE:** ▶ **18R-GT-CU** = RISER HEIGHT-FINISH

## OTHER MOUNTING Options



Item	Description
<b>VHRUL</b>	Variable Height Riser for Up Light, Extends 0"-7" (178 mm)
<b>COUP-XX**</b>	Straight Coupling, ½"
<b>ELBW-050-XX**</b>	90° Elbow Fitting, ½"
<b>TMNT-050-XX**</b>	T-Mount Fitting, ½"
<b>24R-SL-XX**</b>	24" (600 mm) Sign Light Riser
<b>36R-SL-XX**</b>	36" (900 mm) Sign Light Riser
<b>48R-SL-XX**</b>	48" (1200 mm) Sign Light Riser
<b>TR-18-6P-XX**</b>	Tree Ring, 18" (450 mm) Diameter, 6-Position (BZ and FB only)
<b>TR-24-6P-XX**</b>	Tree Ring, 24" (600 mm) Diameter, 6-Position (BZ and FB only)
<b>TR-JB-LL-XX**</b>	Tree Ring, Junction Box, LL Style Conduit Body (BZ and FB only)
<b>TR-JB-T-XX*</b>	Tree Ring, Junction Box, T Style Conduit Body (BZ and FB only)

† Non-returnable \* May require longer lead time \*\* Finish code



*We offer a full range of accessories to help you make the most of every installation.*



---

*FX Luminaire* puts all the resources you need to succeed at your fingertips. Gain the power to install with confidence, troubleshoot with ease, maximize energy savings, and sell with assurance.

*Connect with us on social media to share the latest product news and other important information with your customers.*





# Education, Tools, and Support



MY LIST



MARKETING SUPPORT



HUNTER UNIVERSITY



DEMO KIT

*From product knowledge to marketing support, we offer a full suite of tools, services, and programs to help your business grow.*


# DISCOVER YOUR Path to Success

## MY LIST

### Simplify Your Design and Ordering Process

Use this simple yet powerful tool to plan installations, send your order directly to distributor branches, and add notes to specific projects.

My List helps you customize unique proposals for every customer and streamline orders for your business.

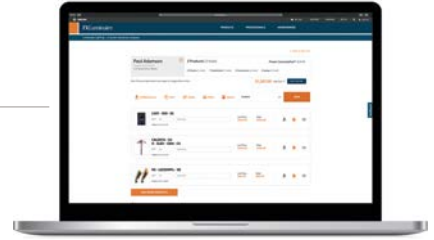


## MARKETING SUPPORT

### Access Helpful Marketing Support Materials

We're dedicated to helping you grow and maintain your business. Build your own branded marketing materials at [fxl.com/professionals](http://fxl.com/professionals).

#### CUSTOMIZABLE PRINT MARKETING

- ▶ Door Hangers
- ▶ Postcards
- ▶ Why FX Brochure
- ▶ Yard Signs
- ▶ Path Light Product Guide
- ▶ Homeowner Brochure
- ▶ Truck Magnets

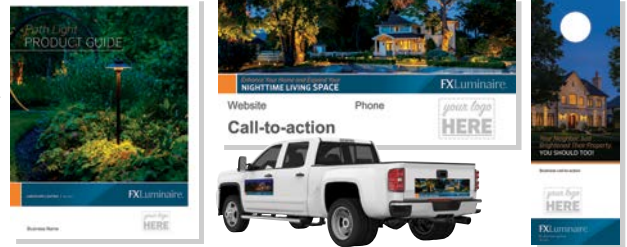

## HUNTER UNIVERSITY

### Lighting Designer Course

Learn best practices for lighting specific spaces in any landscape. This comprehensive, free online program guides you through the design process and shows you how to build a lighting portfolio.

Get started today at [training.hunterindustries.com](http://training.hunterindustries.com) 

Complete courses with a score of at least 80% and you will receive an FX Luminaire certificate of Lighting Design.



## LUXOR DEMO KIT

### Bring the Customer Experience to Light

With our Luxor demo kit, you can create an immersive, at-home experience for customers that showcases the unmatched quality of our lighting products. This leads to higher rates of customer satisfaction, trust in your services, and strong profits.

#### DEMO KIT INCLUDES

- ▶ 300W Luxor lighting controller: LUX300M (120V) or LUX300eM (230V)
- ▶ Metal transformer base
- ▶ Four 40' (12 m) rolls of studded 12/2 (2 mm) wire (250011790001) with wire nuts
- ▶ Four NP ZDC up lights
- ▶ Two LC ZDC wall wash fixtures
- ▶ Two RW ZDC directional path lights
- ▶ Wireless Light Assignment Module (LAM)
- ▶ Luxor Wi-Fi Module (WIFIMOD2)
- ▶ One 10' (3 m) RJ-11 communication cable
- ▶ Eight stability flanges (PDK-BZ)
- ▶ Alligator clips prewired on all fixtures
- ▶ Storage and transportation case, with rubber-coated wheels, pull-out handle, and foam cutouts
- ▶ Two-toned fixtures in orange and black



#### Order code:

FXPRO-025 North American Luxor Demo Kit  
FXPRO-026 International Luxor Demo Kit

\*All fixtures are powder coated in orange or orange/black two-tone configuration.

Visit [fxl.com/professionals](http://fxl.com/professionals) to access more helpful tools and resources — **for free!**

# CE Certified Lighting Products



This chart provides special installation notes and IP ratings for select FX Luminaire lighting products. Reference the indicated pages for further information.

Category	Product	Special Requirements	IP	Page
Power and Control	Luxor	Select export (EU) SKU	54	116
Power and Control	EX	Select export (e) SKU	--	123
Up Light	CC	Install with ground mount (GM-XX) accessory	65	17
Up Light	FB	Select export (e) SKU or install with ground mount (GM-XX) accessory	65	15
Up Light	FR	Install with ground mount (GM-XX) accessory	65	16
Up Light	LO	Install with ground mount (GM-XX) accessory	65	58
Up Light	LR	Install with ground mount (GM-XX) accessory	65	59
Up Light	MU	Select export (e) SKU	65	58
Up Light	NP	Select export (e) SKU or install with export spike (eKITSPIKE) accessory	65	15
Up Light	NR	Install with ground mount (GM-XX) accessory	65	16
Up Light	QB QZ	Install with ground mount (GM-XX) accessory	65	18
Up Light	RS	Install with ground mount (GM-XX) accessory	65	57
Up Light	RW	Install with ground mount (GM-XX) accessory	65	27
Up Light	VS	Install with export spike (eKITSPIKE) accessory	54	17
Wall Wash	PB	Select export (e) SKU or install with export spike (eKITSPIKE) accessory	65/54	19
Wall Wash	LC	Select export (e) SKU or install with ground mount (GM-XX) accessory	65	19
Path/Area Light	CA CV DM	Install with ground mount (GM-XX) accessory	65	24, 66
Path/Area Light	DL, DL-A, DM-A, CA-A	Install with ground mount (GM-XX) accessory	65	65, 66, 67
Path/Area Light	GN	Install with ground mount (GM-XX) accessory	65	70
Path/Area Light	HC	Install with ground mount (GM-XX) accessory	65	23
Path/Area Light	PF PR SC	Install with ground mount (GM-XX) accessory	65	23, 66
Path/Area Light	SP, SP-A	Install with ground mount (GM-XX) accessory	65	65, 67
Path/Area Light	TM	Install with ground mount (GM-XX) or with export spike (eKITSPIKE) accessory	65/54	25, 68

Category	Product	Special Requirements	IP	Page
Path/Area Light	FG TD	Install with ground mount (GM-XX) accessory	64	71, 26
Path/Area Light	JS	Install with ground mount (GM-XX) accessory	65	24
Path/Area Light	PL	Install with ground mount (GM-XX) accessory	65	25, 68
Path/Area Light	PM	Select export (e) SKU	65	27
Path/Area Light	M-PL, M-PJ, M-PK, M-PZ	Select export (e) SKU	65, 66, 66, 66	28, 29
Wall Light	CP	Install with export wall light kit (eKITWALL) accessory	64	35, 77
Wall Light	HS	Select export (e) SKU	66	34
Wall Light	LF	Select export (e) SKU	65	33
Wall Light	LM	Install with export wall light kit (eKITWALL) accessory	64	35, 77
Wall Light	MO	Install with export wall light kit (eKITWALL) accessory	65	38
Wall Light	MS	Select export (e) SKU	65	33
Wall Light	PD	Install with export wall light kit (eKITWALL) accessory	64	36, 78
Wall Light	PO	Install with export wall light kit (eKITWALL) accessory	64	37
Wall Light	UN	Install with export wall light kit (eKITWALL) accessory	64	36, 78
Pendant	LE VE	Select export (e) SKU	64	45
Down Light	JB DE	Select export (e) SKU or install with TreeBox (TB-XX)	65/64	43, 44
Down Light	MD	Select export (e) SKU	65	83
Down Light	PS NL	Install with external wall plate kit	64	46
Down Light	QT	Install with TreeBox (TB-XX)	64	43
Down Light	QL	Select export (e) SKU	67	47
In-Grade	FC	Select export (e) SKU	67	51, 89
In-Grade	KG	Select export (e) SKU	67	51
In-Grade	RP TE	Select export (e) SKU	67	89, 90
Underwater	LB	Select export (e) SKU	67	91
Underwater	LP LL	Select export (e) SKU	67/68	53

# STATEMENT OF Warranty

Hunter Industries Incorporated (“Hunter”) warrants FX Luminaire (“FX”) Transformers to be free of defects in materials or workmanship under normal use for a period of ten (10) years from the original date of installation. Hunter warrants FX Low-Voltage Lighting Fixtures to be free of defects in materials or workmanship under normal use for a period of three (3) years from the original date of installation. Hunter extends the warranty on FX Fixtures to ten (10) years from the original date of installation when both FX Fixtures and Transformers are installed on the same project exclusive of any competitor’s product. Hunter warrants FX LED Fixtures to be free of defects in materials or workmanship under normal use for a period of ten (10) years from the original date of installation. LED MR-16 and G4 lamps and Luxor Cubes are warranted for five (5) years. If a defect in a FX product is discovered during the applicable warranty period, Hunter will repair or replace the product or the defective part, at its discretion. This warranty does not extend to repairs, adjustments, or replacement of a FX product or part that results from misuse, negligence, alteration, modification, tampering, or improper installation and/or maintenance of the product. This warranty extends only to the original installer of the FX product. If a defect arises in a FX product or part during the warranty period, you should contact your local FX Authorized Distributor.

FX’s obligation to repair or replace its products as set forth above is the sole and exclusive warranty set forth by FX. There are no other warranties, expressed or implied, including warranties of merchantability and fitness for a particular purpose. FX will not be liable to distributor or any other party in strict liability, tort, contract, or any other manner for damages caused or claimed to be caused as a result of any design or defect in FX’s products, or for any special, incidental, consequential, or exemplary damages of any nature, including without limitation lost business or profits. Notwithstanding the foregoing, if for any reason FX is found to be liable in no event shall FX’s liability exceed the price of the product which gives rise to the claim, loss, or damage.

Any FX product being returned must receive a Return Goods Authorization number from Hunter Customer Service prior to sending product back. All returned product is subject to a 25% restocking fee. Product must be returned within six (6) months of order date. All product returned must be in its original packaging, be undamaged and unused and never energized.

Product not meeting these criteria will be returned to original sender. Products with specialty finishes are not returnable. Specialty finishes include (but are not limited to): Almond (AL), Verde Speckle (VF), Silver (SV), Flat White (FW), White Gloss (WG), Black Wrinkle (BF), White Wrinkle (WF), and Nickel Plate (NP). Hunter Industries is not responsible for product loss or damage during return transit to RMA location.

If you have questions concerning the warranty or its application, please write to:

Customer Service Department

FX Luminaire  
1940 Diamond Street  
San Marcos, CA 92078 USA

# Index

<b>A</b>		<b>E</b>					
AL	72	EX	123	MO	38	RW	27
A-BR-10	105	<b>F</b>		MOUNTING OPTIONS	140	<b>S</b>	
A-CT-4	105	FB	15	MP	57	SC LED	66
A-CT-5	105	FB LED	15	M-PL	29	SC LED	23
A-HS	107	FC	89	M-PJ	28	SD	42
A-KN	107	FC LED	51	M-PK	28	SL	38
A-NK-4	106	FG	26	M-PZ	29	SP	65
A-NK-6	106	FG LED	71	MR	59	SP-A	67
A-ST-5	106	FR	16	MR-16 LED LAMP	127	SPIKES	140
<b>B</b>		<b>G</b>		MR-16 ECO LAMP	128	<b>T</b>	
BEAM ANGLE LENS	139	G4 LED LAMP	129	MS	33	TC	84
BP	79	GN	70	MU	58	TD	71
BQ	52	GT	70	<b>N</b>		TD LED	26
<b>C</b>		<b>H</b>		NL	46	TE	90
CA	66	HC LED	23	NP	15	TM	68
CA LED	24	HEX BAFFLES	139	NR	16	TM LED	25
CA-A	67	HP	52	<b>P</b>		TREE RING	141
CC	17	HS	34	PB	19	TS	85
C-DL	83	<b>J</b>		PD	36	<b>U</b>	
CF	90	JB	43	PD LED	78	UN	78
CG	75	JS	24	PF	66	UN LED	36
C-IN	90	<b>K</b>		PF LED	23	<b>V</b>	
CL	84	KG	51	PL	25	VC	47
C-LL	79	KT	52	PL LED	68	VE	45
CP	77	<b>L</b>		PM	27	VL	85
CP LED	35	LB	91	PM LED	27	VO	37
C-PL-4	69	LC	19	PO	37	VS	17
C-PL-7	69	LE	45	PR	66	<b>W</b>	
C-UL	60	LF	33	PR LED	23	WALL MOUNTS	140
CV	66	LL	53	PS	46	WS	62
CV LED	24	LM	77	PX	124	WIFIMOD2	116
C-WW	61	LM LED	35	<b>Q</b>		WIFIMOD2RMT	116
C-WW-L	61	LO	58	QB	18	<b>Z</b>	
<b>D</b>		LP	53	QL	47	ZC	41
DE	44	LR	59	QT	43	ZD MR-16 LED LAMP	117
DL	65	LS	85	QZ	18	ZW	41
DL-A	67	LUXOR	115	<b>R</b>			
DM	66	LUXOR CUBE	118	RC	42		
DM LED	24	<b>M</b>		RISER/COUPLING	141		
DM-A	67	MD	83	RISERS	141		
DR	73	MM	78	RL	62		
DS	73			RP	89		
DX	123			RS	57		