


THE FX LUMINAIRE PANCIA  
 DUPPIO WITH THE BOLLARD  
 MOUNT IS PERFECT FOR  
 COMMERCIAL TURF OR RESORT  
 APPLICATIONS WHERE A GLARE  
 FREE, LOW MAINTENANCE  
 PATHLITE IS DESIRED. TIE  
 BOLLARD STYLE DESIGN INTO  
 THE SURROUNDING  
 ARCHITECTURE.

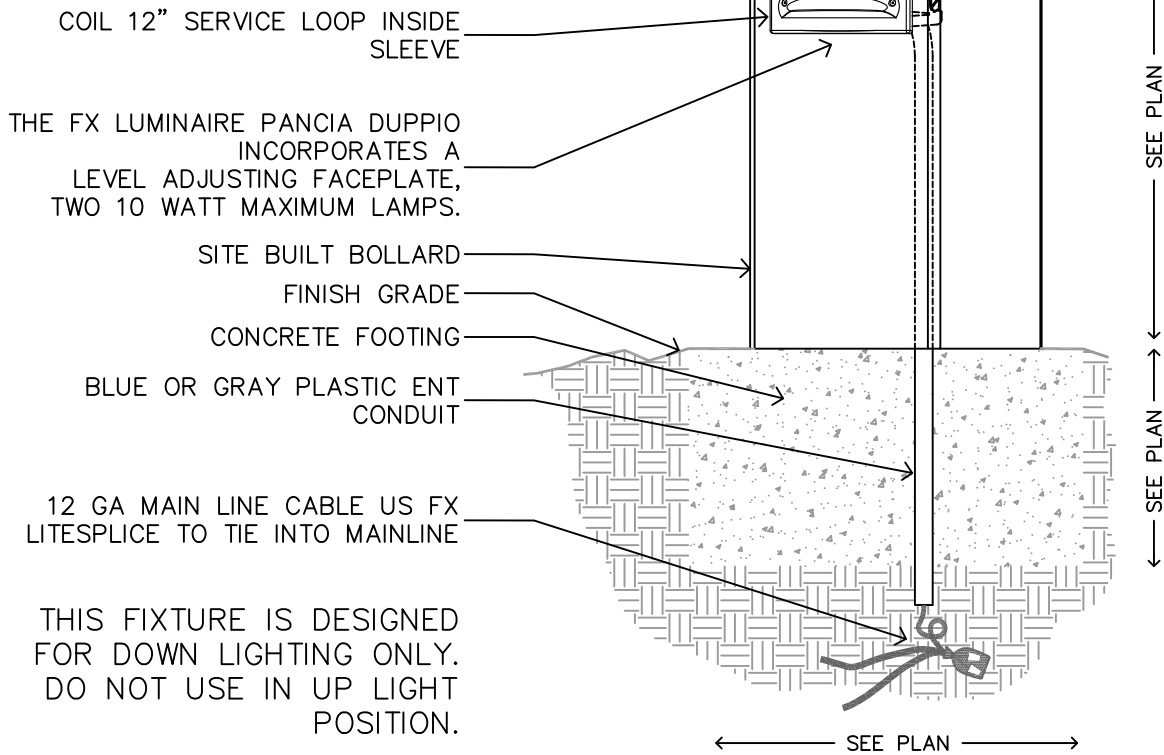

SECTION/ELEVATION

XX PANCIA DUPPIO(PD)  
 BOLLARD MOUNT


---

NOT TO SCALE FX LUMINAIRE DETAIL


THE FX PANCIA DUPPIO IN ANY HORIZONTAL MOUNTING APPLICATION WITH SUPPLIED HARDWARE.

THE FX LUMINAIRE PANCIA DUPPIO INCORPORATES A LEVEL ADJUSTING FACEPLATE, TWO 10 WATT MAXIMUM LAMPS.

WATERPROOF SLEEVE END TO PREVENT WATER FROM SEEPING THROUGH THE WALL INTO THE LAMP HOUSING. LEAVE 12" SERVICE LOOP COILED INSIDE THE SLEEVE.

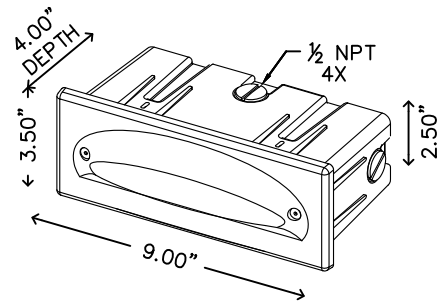

- FX LITESPLICE
- 12 GA MAINLINE CABLE
- BLUE OR GRAY ENT CONDUIT WITH STRANDED THHN WIRE SIZED TO MATCH WATTAGE LOAD.
- IF WALL IS STUCCOED OR COATED USE THE "REUSABLE CONSTRUCTION" COVER TO KEEP CAVITY CLEAN AND CLEAR OF DEBRIS.
- THIS FIXTURE IS DESIGNED FOR DOWN LIGHTING ONLY. DO NOT USE IN UP LIGHT POSITION.

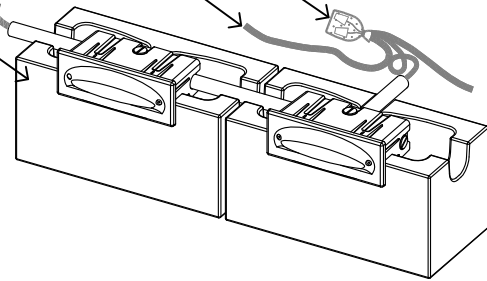

SECTION/ELEVATION

XX


# PANCIA DUPPIO(PD)

## CONCRETE WALL MOUNT

---

NOT TO SCALE FX LUMINAIRE DETAIL

THE FX LUMINAIRE PANCIA  
 DUPPIO USING SUPPLIED  
 HARDWARE. MOUNT 8"–12" OFF  
 FINISHED GRADE.

THE FX LUMINAIRE PANCIA DUPPIO  
 INCORPORATES A LEVEL  
 ADJUSTING FACEPLATE, TWO 10  
 WATT MAXIMUM LAMPS.



WOODEN WALL

COIL 12" SERVICE LOOP INSIDE  
 SLEEVE.


CUT A 4.625" X 2.75" REC HOLE  
 THRU THE WOOD WALL TO MOUNT  
 FX LUMINAIRE PANCIA DUPPIO.  
 MOUNT SLEEVE IN PLACE USING  
 1" #6 GALVANIZED DECK SCREWS.

IF WALL IS STUCCOED OR COATED  
 USE THE "REUSABLE  
 CONSTRUCTION" COVER TO KEEP  
 CAVITY CLEAN AND CLEAR OF  
 DEBRIS.

THIS FIXTURE IS DESIGNED  
 FOR DOWN LIGHTING ONLY.  
 DO NOT USE IN UP LIGHT  
 POSITION.

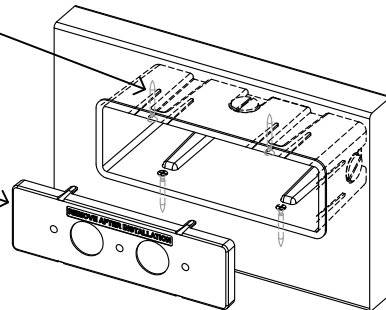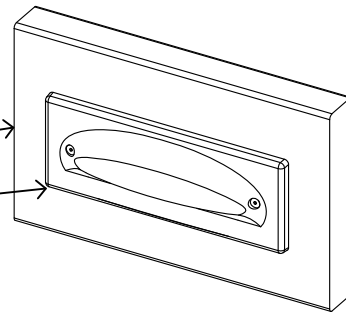

SECTION/ELEVATION



PANCIA DUPPIO(PD)  
 WOOD WALL MOUNT

NOT TO SCALE

FX LUMINAIRE DETAIL