


## DETAIL LEGEND

- ① FX Luminaire BQ fixture. See plan legend for wattage, beam spread and accessories.
- ② Gas grill. See plan legend for type and model.
- ③ Electric wire conduit, per local code.
- ④ Length of wire and cable to be determined. Direct bury, UF/UL, copper, low voltage cable with 3M DBR/Y-6 direct bury splice kit.
- ⑤ Slate or marble. See plan legend for type of material.
- ⑥ Standard brick. See plan for type and model.

## NOTES

- A. Installation to be completed in accordance with manufacturer's specifications.
- B. Accepts 10-15 volts - AC or DC
- C. See plan legend for LED board option, beam spreads, and accessories.
- D. Always refer to FX product installation notes prior to installation.




## BQ FIXTURE

## BRICK - GAS GRILL

NOT TO SCALE

# FXLuminaire

FX LUMINAIRE  
1940 Diamond Street  
San Marcos, CA 92078  
Main: 760-744-5240  
Technical Support: 760-591-7383  
www.fx1.com

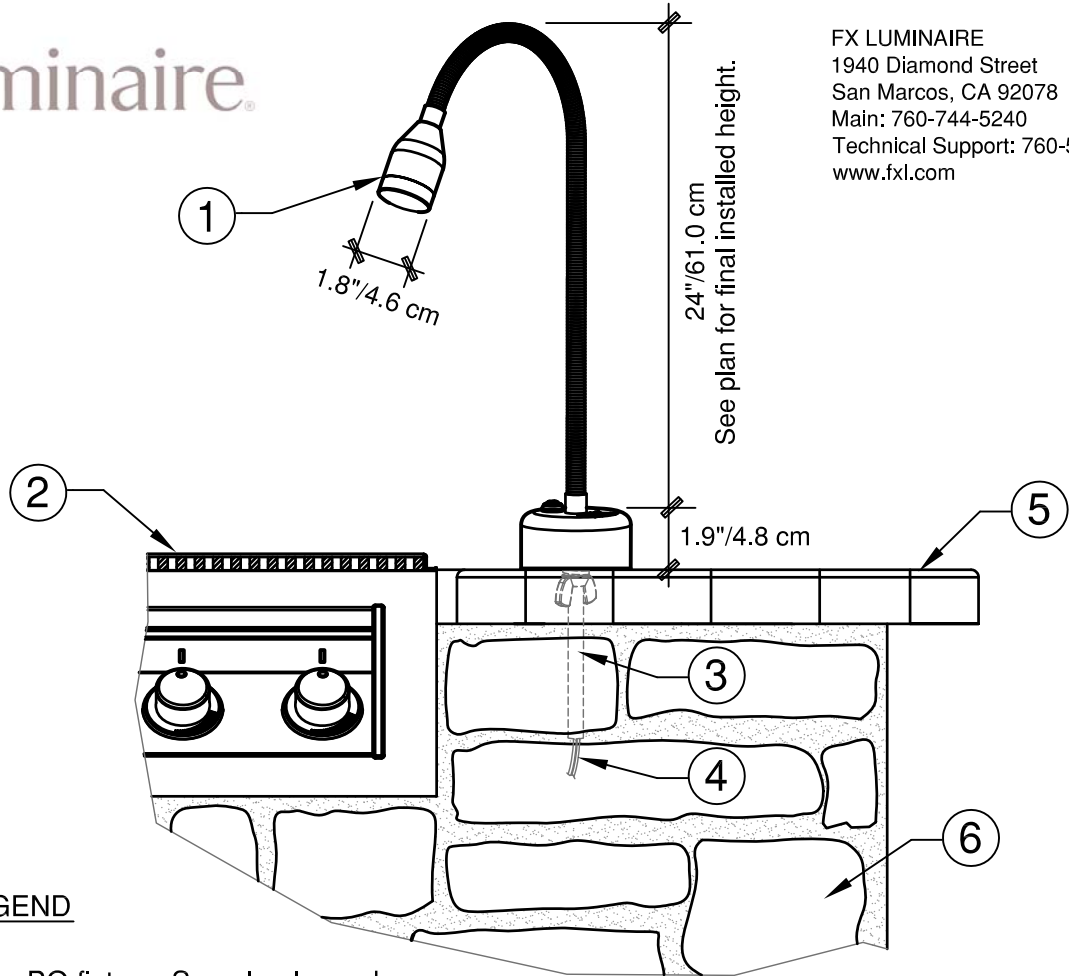


## DETAIL LEGEND

- ① FX Luminaire BQ fixture. See plan legend for wattage, beam spread and accessories.
- ② Gas grill. See plan legend for type and model.
- ③ Electric wire conduit, per local code.
- ④ Length of wire and cable to be determined. Direct bury, UF/UL, copper, low voltage cable with 3M DBR/Y-6 direct bury splice kit.
- ⑤ Ceramic tile. See plan legend for type of material.
- ⑥ Faux stone veneer. See plan for type and model of veneer.

## NOTES


- A. Installation to be completed in accordance with manufacturer's specifications.
- B. Accepts 10-15 volts - AC or DC
- C. See plan legend for LED board option, beam spreads, and accessories.
- D. Always refer to FX product installation notes prior to installation.



## BQ FIXTURE

## FAUX STONE - GAS GRILL

NOT TO SCALE

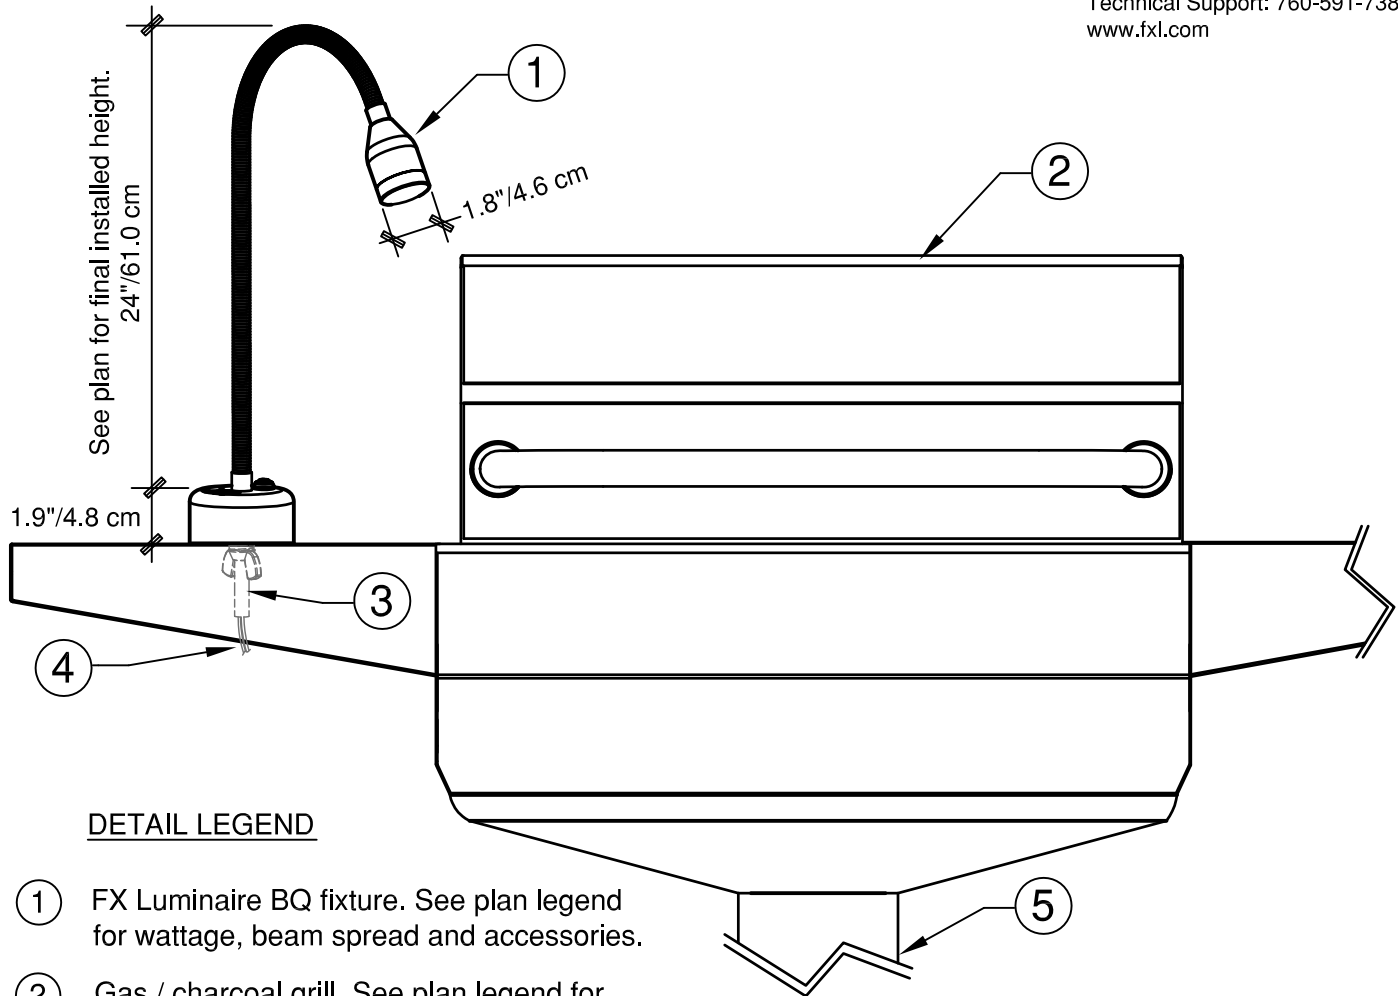


## DETAIL LEGEND

- ① FX Luminaire BQ fixture. See plan legend for wattage, beam spread and accessories.
- ② Gas / charcoal grill. See plan legend for type and model.
- ③ Electric wire conduit, per local code.
- ④ Length of wire and cable to be determined. Direct bury, UF/UL, copper, low voltage cable with 3M DBR/Y-6 direct bury splice kit.
- ⑤ Pole mount. See plan legend for type of material.

## NOTES

- A. Installation to be completed in accordance with manufacturer's specifications.
- B. Accepts 10-15 volts - AC or DC
- C. See plan legend for LED board option, beam spreads, and accessories.
- D. Always refer to FX product installation notes prior to installation.



## BQ FIXTURE

STAINLESS - GAS / CHARCOAL GRILL NOT TO SCALE