

3. DMX512 Control

Step1: connect DMX Controller to power line as below diagram

Step2: connect lamps to power line and DMX Controller as below diagram

Remark: DMX Controller VCC connect to Power supply DC+, GND1 connect to Power supply DC-

5 Wires:

Brown wire connect to DMX controller “VCC”

Black wire connect to DMX controller “GND1”


Yellow wire connect to DMX controller “GND2”

White wire connect to DMX controller “CLK/D-”

Blue wire connect to DMX controller “DAT/D+”

1 pc DMX512 Controller could connect many lamps, in case signal is not strong enough after connect too many lamps, use amplifier to enhance the signal.

Diagram:

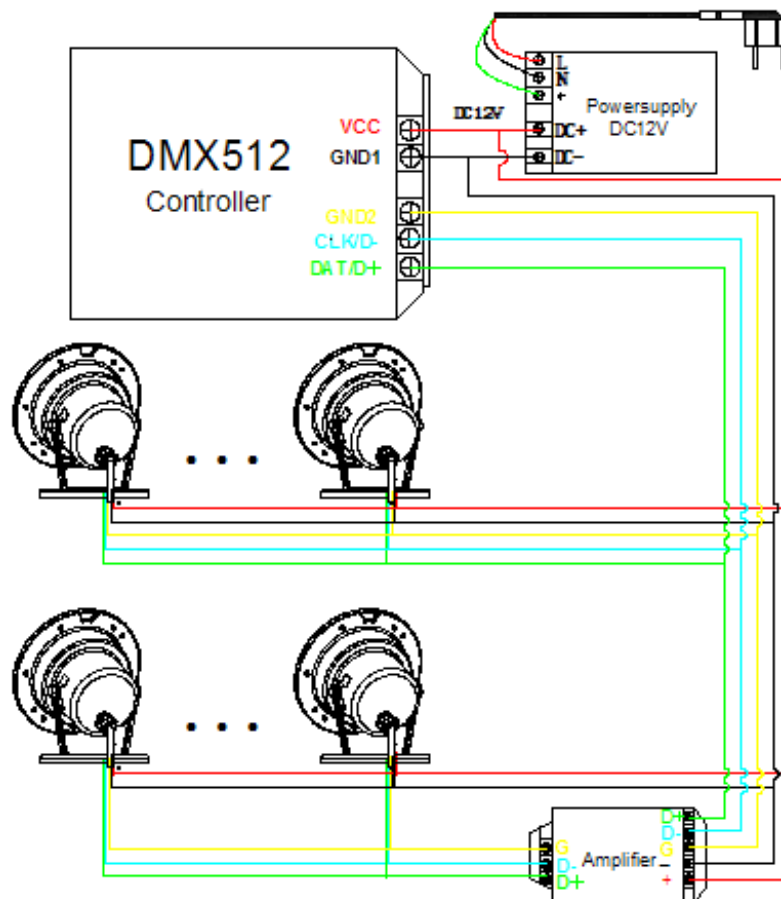


Without hole LED light Installation method

1. Install on the floor


STEP 1:

Fix the underframe to the concrete by anchors and screws

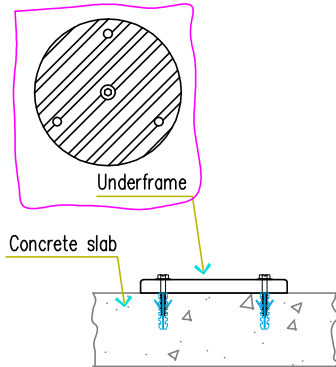


STEP 2:

Fix the lamp to underframe by bolt

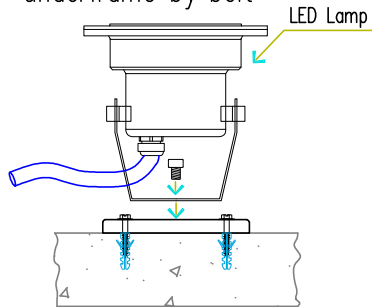


The lamp should be totally under water

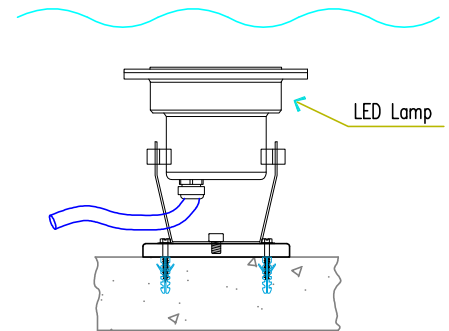

2. Fix to the wall


STEP 1:

Fix the underframe to the concrete by anchors and screws

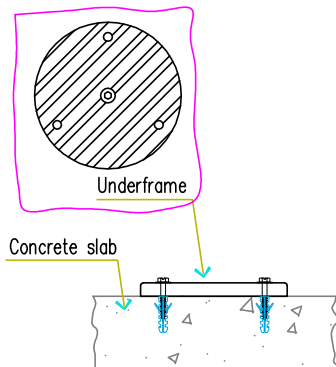


STEP 2:

Fix the lamp to underframe by bolt

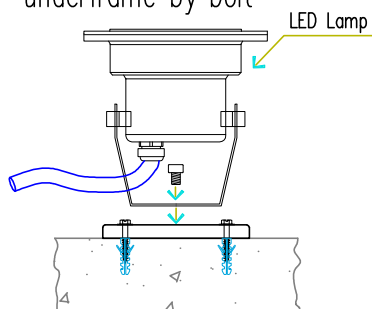

The lamp should be totally under water

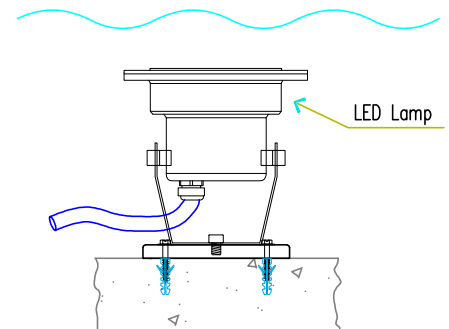


Without hole LED light Installation method

3. Install beside the nozzle


STEP 1:

Fix the clamp support to the pipe

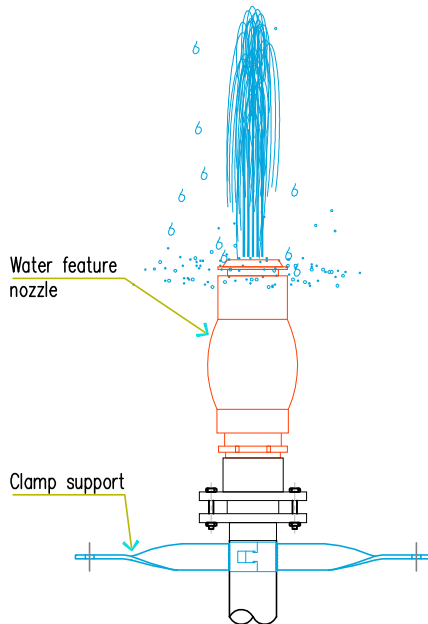


STEP 2:

Fix the lamp to clamp support by bolt & nut

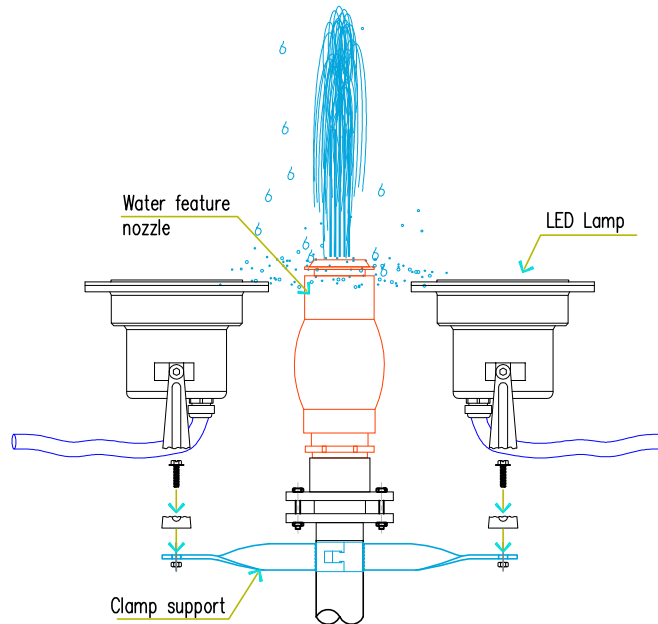

The lamp should be totally under water

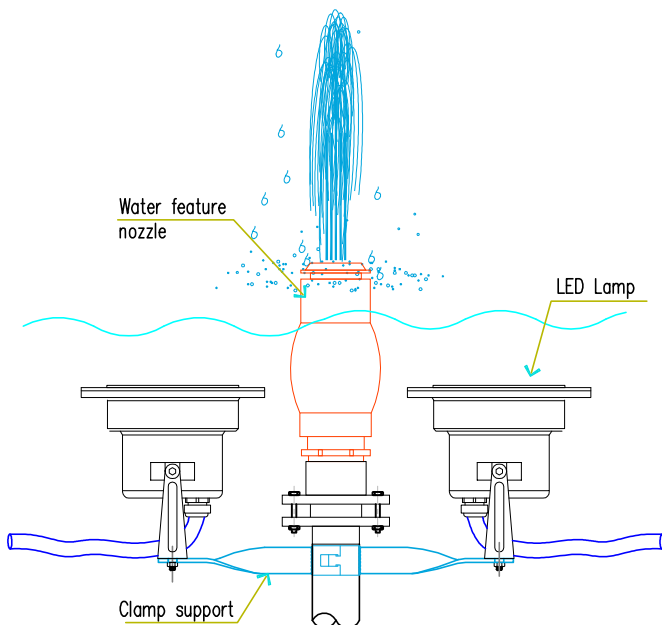


Without hole LED light Installation method

3. Install to the ring spray



STEP 1:

Fix the clamp support to the pipe

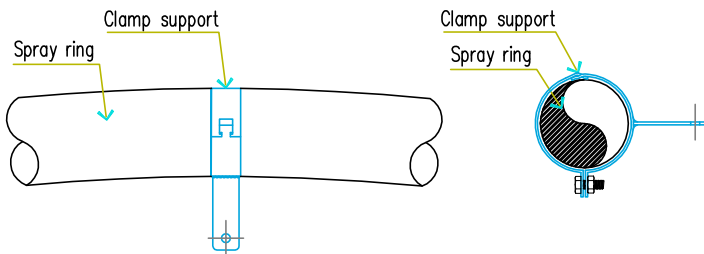

STEP 2:


Fix the lamp to clamp support by bolt & nut

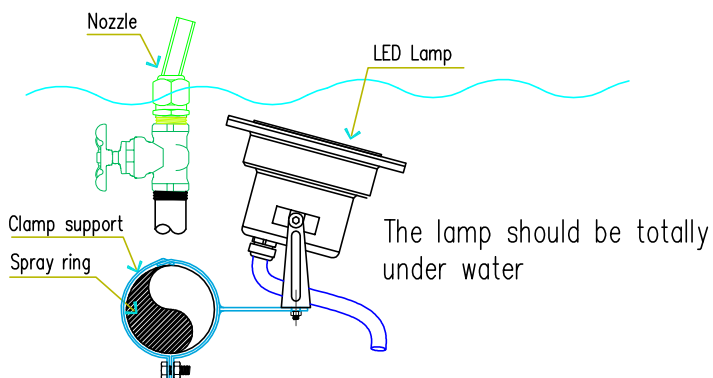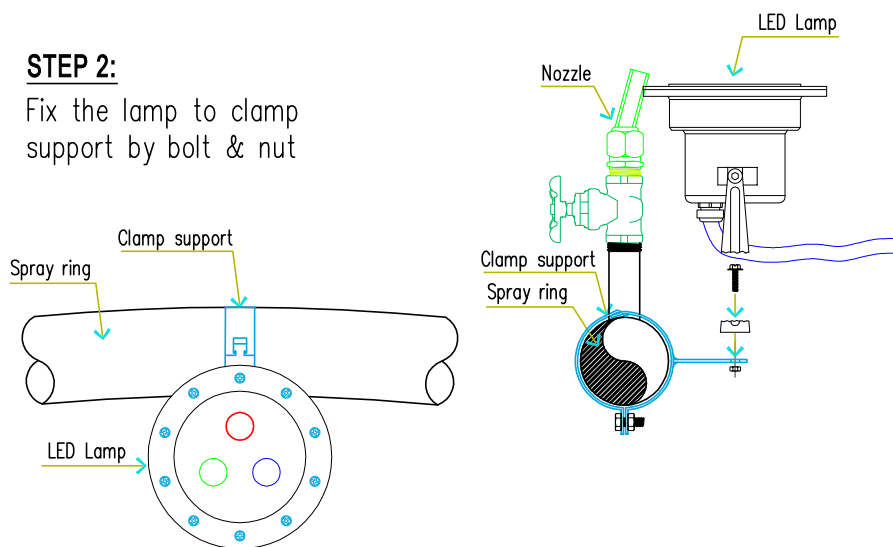

With hole LED light Installation method

Install with nozzle

STEP 1:

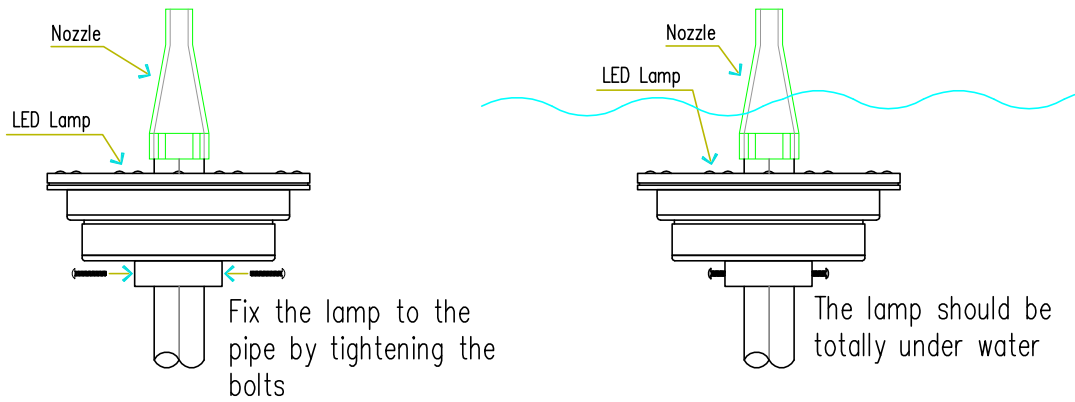

Note: This information is used for basic installation, please contact Viet Garden Company for more details. Hotline: 84 - (0) - 918 099 856; Email: info@densanvuon.com.vn