FXLuminaire.


LED Wall Lights



The PD was designed for areas where 1 LED isn't quite enough. The precision of its design assures that the faceplates of these permanently mounted fixtures will remain perfectly level upon completion of any installation.

PD: Wall Light

| NUMBER OF LEDS: | 2 |
|---|----------------|
| HALOGEN LUMEN OUTPUT EQUIVALENT: | 20 Watt |
| USEFUL LED LIFE (L70): | 50,000 hrs avg |
| INPUT VOLTAGE: | 10 to 15V |
| VA TOTAL: (Use this number to size the transformer) | 4.8 |
| WATTS USED: | 4.0 |
| LUMENS PER WATT (EFFICACY) | 6.9 |
| MAX LUMENS: | 26 |
| CCT (Ra) | 80.1 |

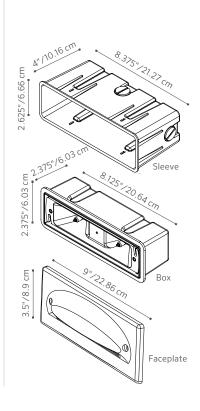

ORDERING INFORMATION




FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

| Step | Description | Code |
|------|-------------|---|
| 1 | FIXTURE | PD |
| 2 | OPTIONAL ZD | ZD (Refer to the Luxor page in the Lighting Control section) |
| 3 | LAMP | 2LED (50,000 avg. life hours) |
| 4 | FINISH | AB*, AT*, NP*, BS, WG, FW, AL, BZ, DG, WI, VF, SB, FB, DT, CB |


EXAMPLE: PD-ZD-2LED-CB = PD - ZD Option - Two 1LED Boards - Camo Bronze Finish

PHOTOMETRICS:

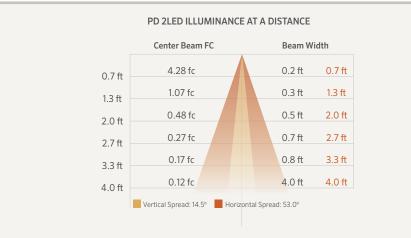

Beam angle is calculated using LM-79 method for SSL Luminaires: "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."


MOUNTING FEATURES AND DIMENSIONS:



Perfectly Level Every Time

The LevelX system allows the composite sleeve to be up to %" out of level, in either direction, while still allowing the faceplate to be laser level.

The secret: The trim attaches to the adjustable reflector assembly – not the composite sleeve or body. Heavy foam gasket keeps light spill to a minimum.

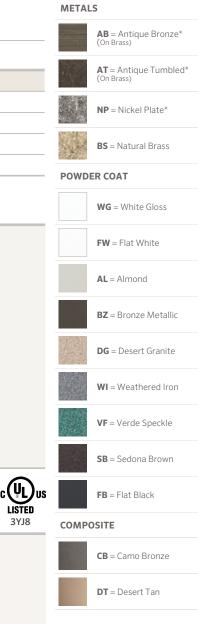

The PD includes two 1LED boards, choice of faceplate finish, 8 ft lead wire and mounting sleeve.



All PD wall lights come standard with amber and frosted filters

* May require longer lead time

LED

FXLuminaire.