

## HG-FTN-9x1W

It will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.



# Submersible LED Lights

HG-FTN LED lights are capable of being placed above or below the water line. This feature allows you to create lighting accents in endless combinations. The LED lights also are capable of being placed underwater exclusively, which means your fish or underwater landscape can become the focal point of your pond experience. HG-FTN will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.

## **Specifications**


•		
Single Color	W/R/G/B/Y	
Cable Connection	2 wires	
Body Material	316 stainless steel	
Size	179mmD x 77mmH x 50mm	
Number of LED	9 x 1W	
Input Voltage	AC/DC 12V	
Watts Used	9W	
Power Consumption	0.80A	
Lumens per Watt	84.80 lm/w	
Max Lumens:	796.12 lm	
Working Temperature 0 - 40 °C		
Beam Angle	25/30/45/60°	
IP Rating	IP.68	
Useful LED Life	50,000 hrs average	
Warranty	2 years	







Spectrophotocolorimeter Test Report

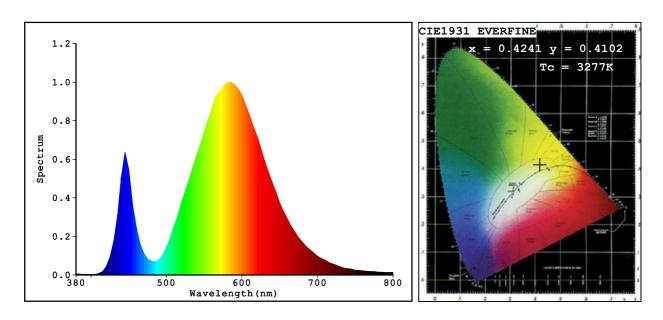

## Light Source Test Report

### Color Parameters:

Chromaticity Coordinate:x=0.4241 y=0.4102/u'=0.2398 v'=0.5219 Tc=3277K Dominant WL:Ld=580.1nm Purity=50.4% Centroid WL:579.0nm Ratio:R=19.7% G=79.0% B=1.3% Peak WL:Lp=585.0nm HWL:108.2nm Render Index:Ra=62.7 R1 =57 R2 =73 R3 =87 R4 =58 R5 =55 R6 = 60R7 = 76R8 = 36R9 = -63R10=37 R11=48 R12=27 R13=59 R14=92 R15=50

### Photo Parameters:

Flux: 796.12 lm Fe: 2.1492 W Efficacy:84.80 lm/W LEVEL: WHITE:ANSI 3500K

#### **Electrical Parameters:**

Luminaire: U=14.30V I=0.8024A P=9.388W PF=0.8185

Instrument Status:		
Scan Range:380.0nm-800.0nm	<pre>Interval:5.0nm[0]</pre>	Ip=21937(G=5,D=51)
REF=36162 (R=4)	8=-0.1428	PMT: 22.6 centigrade [23.6]

Product Type:样品 Number:HG-PQX-9X1W-暖白 Temperature:25.3 deg Test Operator: Software:V2.00.100 Manufacturer:Heguang Lighting Co.,LTD Test Department:Heguang Lighting Co.,LTD Humidity:65.0% Test Date:2015-01-29 20:44:01 Instrument:PMS-80\_V1 (SN:1011025)