

## HG-FTN-9x1W

It will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.



# Submersible LED Lights

HG-FTN LED lights are capable of being placed above or below the water line. This feature allows you to create lighting accents in endless combinations. The LED lights also are capable of being placed underwater exclusively, which means your fish or underwater landscape can become the focal point of your pond experience. HG-FTN will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.

## **Specifications**


| -                   |                       |
|---------------------|-----------------------|
| Control Method      | DMX control           |
| Color               | RGB                   |
| Cable Connection    | 5 wires               |
| Body Material       | 316 stainless steel   |
| Size                | 179mmD x 77mmH x 50mm |
| Number of LED       | 9 x 1W                |
| Input Voltage       | DC 12V                |
| Watts Used          | 9W                    |
| Power Consumption   | 0.80A                 |
| Lumens per Watt     | 84.80 lm/w            |
| Max Lumens:         | 796.12 lm             |
| Working Temperature | 0 - 40 <sup>0</sup> C |
| Beam Angle          | 15/25/30/45/60°       |
| IP Rating           | IP.68                 |
| Useful LED Life     | 50,000 hrs average    |
| Warranty            | 2 years               |
|                     |                       |







Spectrophotocolorimeter Test Report

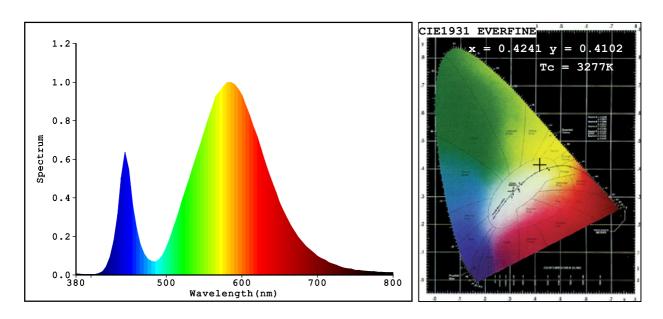

## Light Source Test Report

### Color Parameters:

Chromaticity Coordinate:x=0.4241 y=0.4102/u'=0.2398 v'=0.5219 Tc=3277K Dominant WL:Ld=580.1nm Purity=50.4% Centroid WL:579.0nm Ratio:R=19.7% G=79.0% B=1.3% Peak WL:Lp=585.0nm HWL:108.2nm Render Index:Ra=62.7 R1 =57 R2 =73 R3 =87 R4 =58 R5 =55 R6 = 60R7 = 76R8 = 36R9 = -63R10=37 R11=48 R12=27 R13=59 R14=92 R15=50

### Photo Parameters:

Flux: 796.12 lm Fe: 2.1492 W Efficacy:84.80 lm/W LEVEL: WHITE:ANSI 3500K

#### **Electrical Parameters:**

Luminaire: U=14.30V I=0.8024A P=9.388W PF=0.8185

| Instrument Status:         |                              |                             |
|----------------------------|------------------------------|-----------------------------|
| Scan Range:380.0nm-800.0nm | <pre>Interval:5.0nm[0]</pre> | Ip=21937(G=5,D=51)          |
| REF=36162 (R=4)            | 8=-0.1428                    | PMT: 22.6 centigrade [23.6] |

Product Type:样品 Number:HG-PQX-9X1W-暖白 Temperature:25.3 deg Test Operator: Software:V2.00.100 Manufacturer:Heguang Lighting Co.,LTD Test Department:Heguang Lighting Co.,LTD Humidity:65.0% Test Date:2015-01-29 20:44:01 Instrument:PMS-80\_V1 (SN:1011025)