



**HG-UL-6X1W**

*It will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.*



### Submersible LED Lights



HG-UL LED lights are capable of being placed above or below the water line. This feature allows you to create lighting accents in endless combinations. The LED lights also are capable of being placed underwater exclusively, which means your fish or underwater landscape can become the focal point of your pond experience. HG-UL will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.

#### Specifications

Control Method	Wifi control
Color:	RGB
Cable Connection	4 wires
Body Material	316 stainless steel
Size	124.5mmDia x 127mmH
Number of LED	6 x 1W
Input Voltage	AC/DC 12V
Watts Used	6W
Power Consumption	0.59A
Lumens per Watt	84.06 lm/w
Max Lumens:	568.25 lm
Working Temperature	0 - 40 °C
Beam Angle	15/25/30/45/60°
IP Rating	IP.68
Useful LED Life	50,000 hrs average
Warranty	2 years



Light Source Test Report

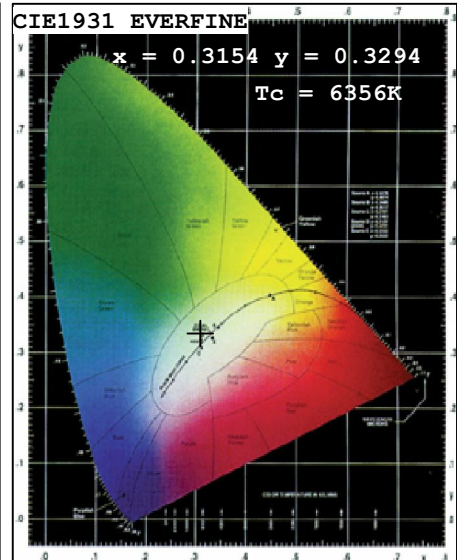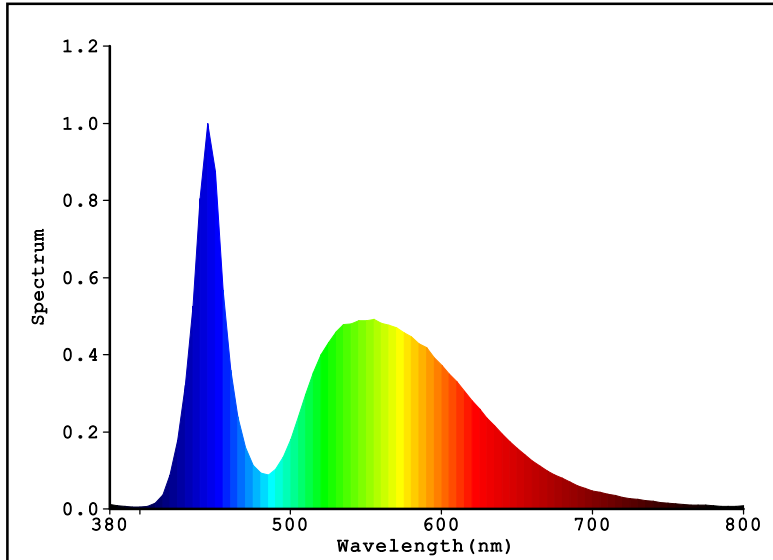

Color Parameters:

Chromaticity Coordinate:  $x=0.3154$   $y=0.3294$   $u'=0.1996$   $v'=0.4689$   
Tc=6356K Dominant WL:Ld=488.9nm Purity=6.3% Centroid WL:543.0nm  
Ratio:R=13.5% G=83.3% B=3.2% Peak WL:Lp=445.0nm HWL:22.3nm  
Render Index:Ra=70.9  
R1 =70 R2 =73 R3 =73 R4 =73 R5 =72 R6 =64 R7 =79  
R8 =62 R9 =-23 R10=35 R11=72 R12=42 R13=70 R14=85 R15=66

Photo Parameters:

Flux: 568.25 lm Fe: 1.7934 W Efficacy:84.06 lm/W  
LEVEL: WHITE:ANSI\_6500K

Electrical Parameters:

Luminaire: U=14.35V I=0.5917A P=6.760W PF=0.7961

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=42685 (G=5,D=51)  
REF=25447 (R=4) %=-0.198% PMT: 23.4 centigrade [23.8]

Product Type:样品  
Number:HG-P30U-6XW正白  
Temperature:25.3 deg  
Test Operator:  
Software:V2.00.100

Manufacturer:Heguang Lighting Co.,LTD  
Test Department:Heguang Lighting Co.,LTD  
Humidity:65.0%  
Test Date:2015-01-29 21:17:07  
Instrument:PMS-80\_V1 (SN:1011025)