


THE FX LUMINAIRE LOUVER
MASSIMO WITH THE BOLLARD
MOUNT IS PERFECT FOR
COMMERCIAL TURF OR RESORT
APPLICATIONS WHERE A GLARE
FREE, LOW MAINTENANCE
PATHLITE IS DESIRED. TIE
BOLLARD STYLE DESIGN INTO
THE SURROUNDING
ARCHITECTURE.

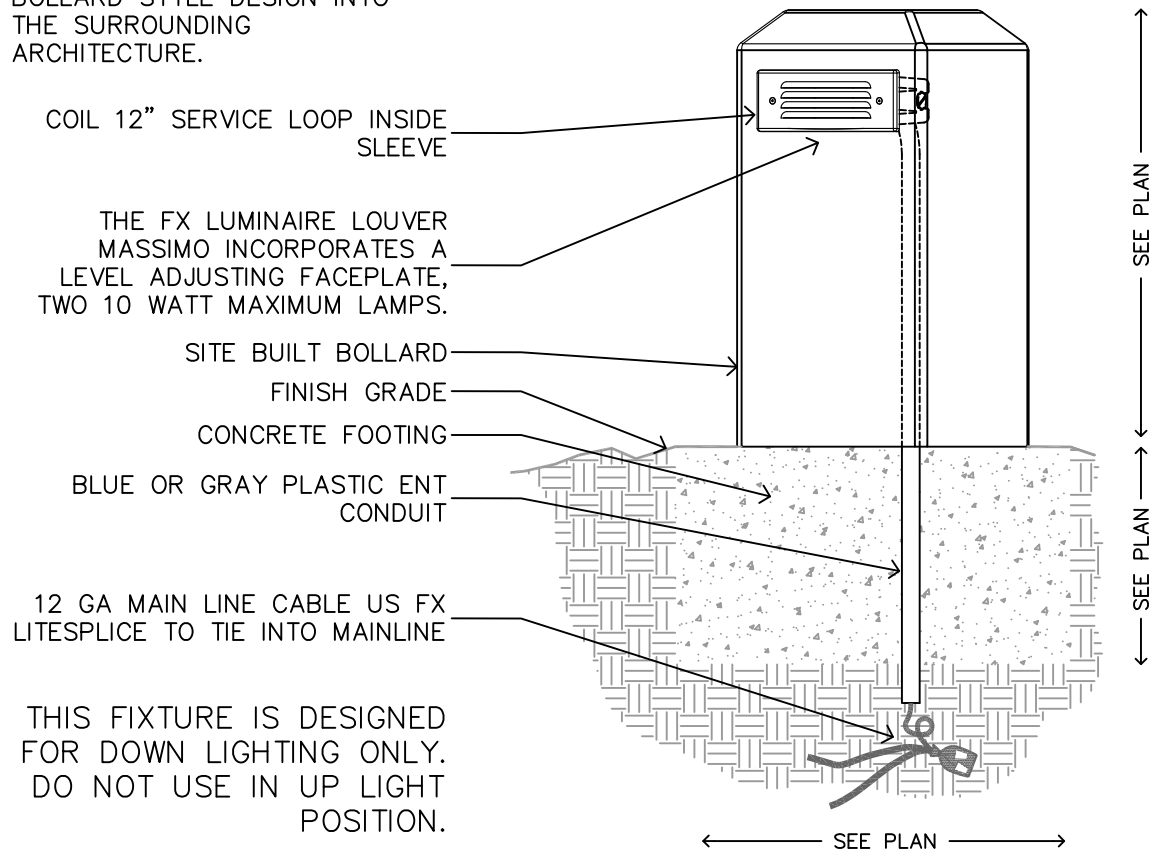


SECTION/ELEVATION

XX LOUVER MASSIMO(LM) BOLLARD MOUNT NOT TO SCALE FX LUMINAIRE DETAIL


THE FX LOUVER MASSIMO IN ANY HORIZONTAL MOUNTING APPLICATION WITH SUPPLIED HARDWARE.

THE FX LUMINAIRE LOUVER MASSIMO INCORPORATES A LEVEL ADJUSTING FACEPLATE, TWO 10 WATT MAXIMUM LAMPS.

WATERPROOF SLEEVE END TO PREVENT WATER FROM SEEPING THROUGH THE WALL INTO THE LAMP HOUSING. LEAVE 12" SERVICE LOOP COILED INSIDE THE SLEEVE.

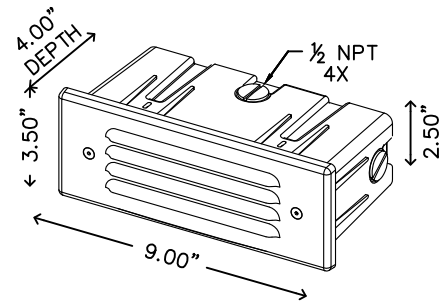

- FX LITESPLICE
- 12 GA MAINLINE CABLE
- BLUE OR GRAY ENT CONDUIT WITH STRANDED THHN WIRE SIZED TO MATCH WATTAGE LOAD.
- IF WALL IS STUCCOED OR COATED USE THE "REUSABLE CONSTRUCTION" COVER TO KEEP CAVITY CLEAN AND CLEAR OF DEBRIS.
- THIS FIXTURE IS DESIGNED FOR DOWN LIGHTING ONLY. DO NOT USE IN UP LIGHT POSITION.

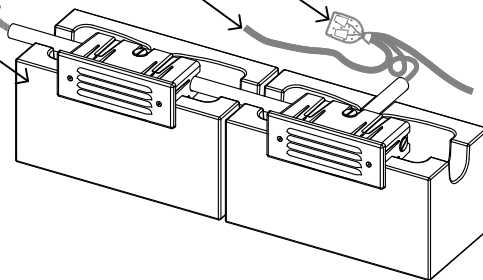

SECTION/ELEVATION

XX LOUVER MASSIMO(LM) CONCRETE WALL MOUNT NOT TO SCALE FX LUMINAIRE DETAIL

THE FX LUMINAIRE LOUVER
MASSIMO USING SUPPLIED
HARDWARE. MOUNT 8"–12" OFF
FINISHED GRADE.

THE FX LUMINAIRE LOURVE
MASSIMO INCORPORATES A LEVEL
ADJUSTING FACEPLATE, TWO 10
WATT MAXIMUM LAMPS.



WOODEN WALL

COIL 12" SERVICE LOOP INSIDE
SLEEVE.

CUT A 4.625" X 2.75" REC HOLE
THRU THE WOOD WALL TO MOUNT
FX LUMINAIRE CANDELA PASSO.
MOUNT SLEEVE IN PLACE USING
1" #6 GALVANIZED DECK SCREWS.

IF WALL IS STUCCOED OR COATED
USE THE "REUSABLE
CONSTRUCTION" COVER TO KEEP
CAVITY CLEAN AND CLEAR OF
DEBRIS.

THIS FIXTURE IS DESIGNED
FOR DOWN LIGHTING ONLY.
DO NOT USE IN UP LIGHT
POSITION.

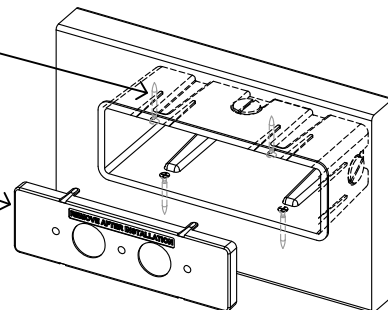

SECTION/ELEVATION

XX LOURVE MASSIMO(LM)
WOOD WALL MOUNT
NOT TO SCALE FX LUMINAIRE DETAIL