




Designed for mid-sized landscapes, the TM provides unmatched elegance and function in the aluminum-constructed category. Its small cap offers stylish path illumination without overwhelming the landscape features.

TM: Path Light

NUMBER OF LEDs:	1	3
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	20 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4	4.5
WATTS USED:	2.0	4.2
LUMENS PER WATT (EFFICACY)	16.0	23.5
MAX LUMENS:	27	79
CRI (Ra)	84.8	81.6

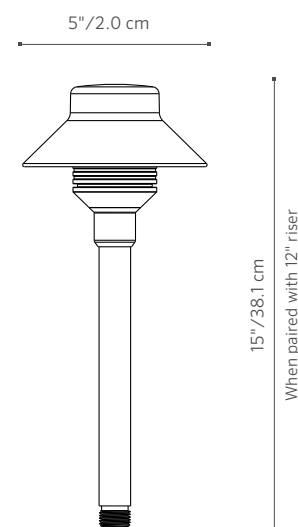



TM: Path Light

FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

Step	Description	Code
1	TOP ASSEMBLY	TMLEDTA
2	TOP FINISH	WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: **TMLEDTA-SB** = TM Top Assembly - Sedona Brown Finish

FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

Step	Description	Code
1	RISER TYPE	A
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED, 3LED (50,000 avg. life hours)
4	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 30RA, 36RA (in inches)
5	FINISH	WG, FW, AL, BZ, DG, WI, VF, SB, FB


EXAMPLE: **A-ZD-1LED-24RA-SB** = Riser Type - ZD Option - 1 LED Board - 24" Riser - Sedona Brown Finish

FIELD INSTALLED OPTIONS: Order Individually

Mounting Options	
Long Slot Spike (250015840000) 2.5" x 10" Included ▶	
Super Slot Spike (753900) 2" x 10"	
SuperJ-Box (SJ-XX**) 2.5" x 12"	
Post Mount (PM-XX**) 2.5" x 13"	

EXAMPLE: **753900** = Super Slot Spike

PHOTOMETRICS:

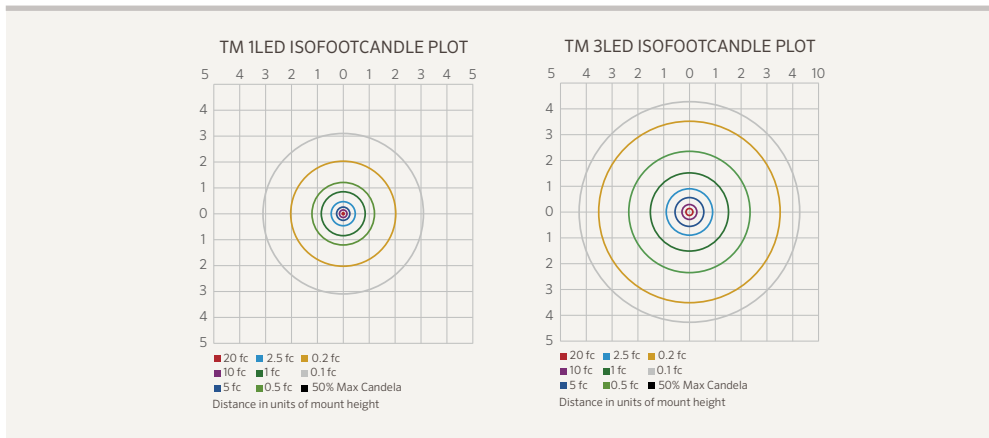

Beam angle is calculated using LM-79 method for SSL Luminaires:

"Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

POWDER COAT

	WG = White Gloss
	FW = Flat White
	AL = Almond
	BZ = Bronze Metallic
	DG = Desert Granite
	WI = Weathered Iron
	VF = Verde Speckle
	SB = Sedona Brown
	FB = Flat Black

The TM includes your choice of 1 or 3LED board, riser size, finish, 3 ft. lead wire and a Long Slot Spike.



All TM path lights come standard with amber, green, blue and frosted filters

* May require longer lead time

** Denotes finish code