



*The LED PR produces a soft, efficient glow, and is designed specifically for those who prefer smooth, rounded shapes as opposed to hard angles. It is sized right for illuminating tight planter areas, side yards, or utility paths.*

### PR: Path Light

NUMBER OF LEDS:	1
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V
VA TOTAL: (Use this number to size the transformer)	2.4
WATTS USED:	2.0
LUMENS PER WATT (EFFICACY)	19.4
MAX LUMENS:	39
CCT (Ra)	86





# PR: Path Light

### FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

Step	Description	Code
1	TOP ASSEMBLY	PRLEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: **PRLEDTA-FW** = PR Top Assembly - Flat White Finish

### FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

Step	Description	Code
1	RISER TYPE	P
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
5	FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB

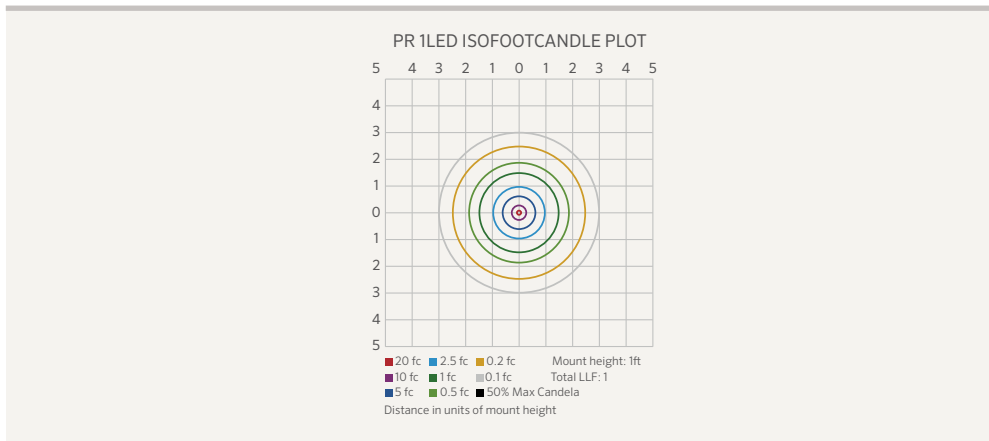
EXAMPLE: **P-ZD-1LED-18RA-FW** = Riser Type - ZD Option - 1 LED Board - 18" Riser - Flat White Finish

### FIELD INSTALLED OPTIONS: Order Individually

Mounting Options		
Long Slot Spike (250015840000) 2.5" x 10" <b>Included</b> ▶	 Long Slot Spike	
Super Slot Spike (753900) 2" x 10"		 Super Slot Spike
SuperJ-Box (SJ-XX**) 2.5" x 12"		
Post Mount (PM-XX**) 2.5" x 13"		 Post Mount XX**





EXAMPLE: **753900** = Super Slot Spike

### PHOTOMETRICS:












Beam angle is calculated using LM-79 method for SSL Luminaires:  
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."


### METALS

-  **AB** = Antique Bronze\* (On Copper/Brass)
-  **AT** = Antique Tumbled\* (On Copper/Brass)
-  **CU** = Copper
-  **NP** = Nickel Plate\*

### POWDER COAT

-  **WG** = White Gloss
-  **FW** = Flat White
-  **AL** = Almond
-  **BZ** = Bronze Metallic
-  **DG** = Desert Granite
-  **WI** = Weathered Iron
-  **VF** = Verde Speckle
-  **SB** = Sedona Brown
-  **FB** = Flat Black

The PR includes a 1LED board, and choice of riser size and finish, 3 ft. lead wire and Long Slot Spike.



All PR path lights come standard with amber, green, blue and frosted filters

**Note:** Only the copper portions of the path lights are powder coated. The brass pieces remain natural.

\* May require longer lead time

\*\* Denotes finish code