







HG-UG-3W

It will easily light up your landscape or waterfall at night, and give you the display that even professionals will envy.

In-ground LED Lights

HG-UG LED lights are capable of being placed above ground or below the water line. This feature allows you to create lighting accents in endless combinations. The LED lights also are capable of being placed in ground or underwater exclusively, which means your gardens or fountains can become the focal point of your landscape experience. HG-UG will easily light up your gardens or waterfalls at night, and give you the display that even professionals will envy.

Specifications

Single Color: White/R/G/B/Y

Cable Connection 2 wires

Body Material 304 stainless steel
Size 42mmDia x 73mmH

Number of LFD 1ea

Input Voltage AC/DC 12V

Watts Used 3W

Power Consumption 0.37A

Lumens per Watt 52.20 lm/w Max Lumens: 200.76 lm

Working Temperature 0 - 40 $^{\rm 0}{\rm C}$

Beam Angle 15/25/30/45/60°

IP Rating IP.68

Useful LED Life 50,000 hrs average


Warranty 2 years








Light Source Test Report

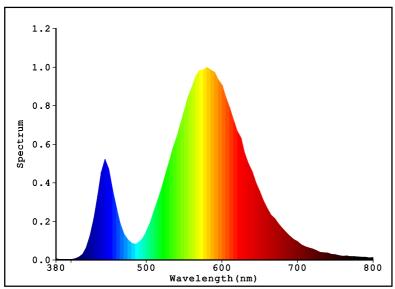

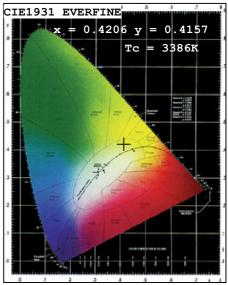

Color Parameters:

 $\label{eq:condinate:x=0.4206} \begin{tabular}{ll} $y = 0.4157/u' = 0.2354 & $v' = 0.5235$ \\ Tc = 3386K & Dominant WL:Ld = 578.8nm & Purity = 51.0\% & Centroid WL:577.0nm \\ Ratio:R = 18.7\% & G = 80.0\% & B = 1.4\% & Peak WL:Lp = 580.0nm & HWL:105.9nm \\ \end{tabular}$

Render Index:Ra=61.2

R1 =55 R2 =71 R3 =86 R4 =56 R5 =53 R6 =57 R7 =76

R8 = 35 R9 = -70 R10 = 33 R11 = 45 R12 = 24 R13 = 57 R14 = 92 R15 = 47

Photo Parameters:

Flux: 200.76 lm Fe: 0.53414 W Efficacy:52.20 lm/W

LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U=12.59V I=0.3746A P=3.846W PF=0.8153

Instrument Status:

Product Type:样品15HK00047

Number:HG-UG-3W 暖白 Temperature:25.3 deg

Test Operator: Software: V2.00.100 Manufacturer: Heguang Lightlng CO., LTD Test Department: Heguang Lightlng CO., LTD

Humidity:65.0%

Test Date:2015-02-04 10:49:29 Instrument:PMS-80 V1 (SN:1011025)