

HG-P56B-18x1W

It will easily light up your swimming pools at night, and give you the display that even professionals will envy.







Stainless steel PAR56 Swimming pool Lights

Installing P56 swimming pool lamps to your swimming pool means you can also enjoy a swim at night. It also adds to the beauty of both the pool itself and the surrounding area. The combination of lights, music and color will help you create the right atmosphere at the right time and for each state of mind. And we always use lamps with cutting-edge technology to guarantee maximum durability and very low consumption. With PAR56, you can enjoy a unique swimming pool every day.

Specifications

Single Color W/G/B/R/Y

Cable Connection 2 wires

Body Material 316 stainless steel

Size 177mmD x 104.6mmH

Number of LED $18 \times 1W$ Input Voltage AC/DC 12V
Frequency $50^{\sim}60$ Hz
Watts Used 18 ± 1 W

Power Consumption 2.01A

Lumens per Watt 52.97 lm/w Max Lumens: 1,154.70 lm Working Temperature $0 - 40^{\circ}$ C

Beam Angle 15°/25°/30°/45°/60°/**120**°


Application Fresh and salt water

IP Rating IP.68

Useful LED Life 50,000 hrs average


Warranty 2 years




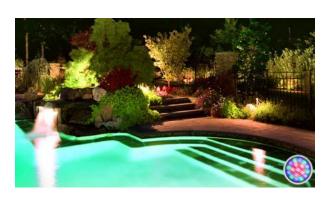



Light Source Test Report

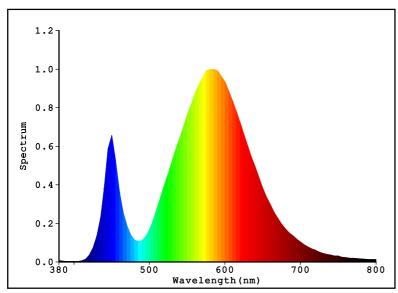

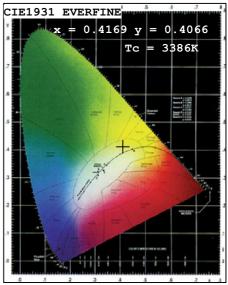

Color Parameters:

 $\label{eq:condinate:x=0.4169} \begin{array}{lll} \text{Chromaticity Coordinate:x=0.4169} & \text{y=0.4066/u'=0.2367} & \text{v'=0.5194} \\ \text{Tc=3386K} & \text{Dominant WL:Ld=579.7nm} & \text{Purity=47.2\% Centroid WL:578.0nm} \\ \text{Ratio:R=19.4\% G=78.9\% B=1.7\%} & \text{Peak WL:Lp=585.0nm} & \text{HWL:111.6nm} \\ \end{array}$

Render Index:Ra=65.2

R1 =60 R2 =75 R3 =88 R4 =60 R5 =58 R6 =63 R7 =77

R8 = 39 R9 = -56 R10 = 42 R11 = 50 R12 = 30 R13 = 62 R14 = 93 R15 = 53

Photo Parameters:

Flux: 1127.1 lm Fe: 3.6250 W Efficacy:51.10 lm/W

LEVEL: WHITE: ANSI 3500K

Electrical Parameters:

Luminaire: U=12.68V I=2.023A P=22.06W PF=0.8601

Instrument Status:

Product Type:13HC00135 Number:HG-P56B-18X1W Temperature:25.3 deg Test Operator:DAMIN Software:V2.00.100 Manufacturer: Heguang Lighting Co., Ltd
Test Department: Heguang Lighting Co., Ltd

Humidity:65.0%

Test Date:2013-04-28 13:42:23 Instrument:PMS-80_V1 (SN:1011025)