



HG-P56B-18x3W

It will easily light up your swimming pools at night, and give you the display that even professionals will envy.




Stainless steel PAR56 Swimming pool Lights



Installing P56 swimming pool lamps to your swimming pool means you can also enjoy a swim at night. It also adds to the beauty of both the pool itself and the surrounding area. The combination of lights, music and color will help you create the right atmosphere at the right time and for each state of mind. And we always use lamps with cutting-edge technology to guarantee maximum durability and very low consumption. With PAR56 , you can enjoy a unique swimming pool every day.

Specifications

Control Method	DMX; External; Wifi; Auto
Color	RGB - 14 programs
Cable Connection	5/4/4/2 wires
Body Material	316 stainless steel
Size	177mmD x 104.6mmH
Number of LED	18 x 3W
Input Voltage	AC/DC 12V
Frequency	50~60Hz
Watts Used	25±1 W
Power Consumption	2.43A
Lumens per Watt	29.67 lm/w
Max Lumens:	829.59 lm
Working Temperature	0 - 40 °C
Beam Angle	15°/25°/30°/45°/60°/120°
Application	Fresh and salt water
IP Rating	IP.68
Useful LED Life	50,000 hrs average
Warranty	2 years

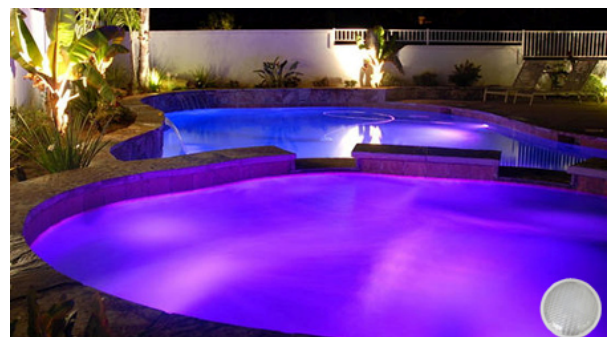

Light Source Test Report

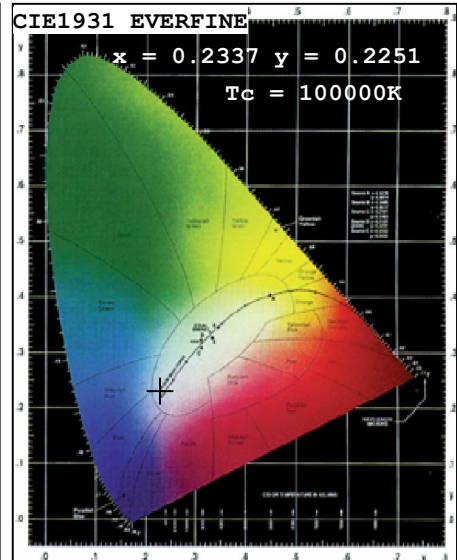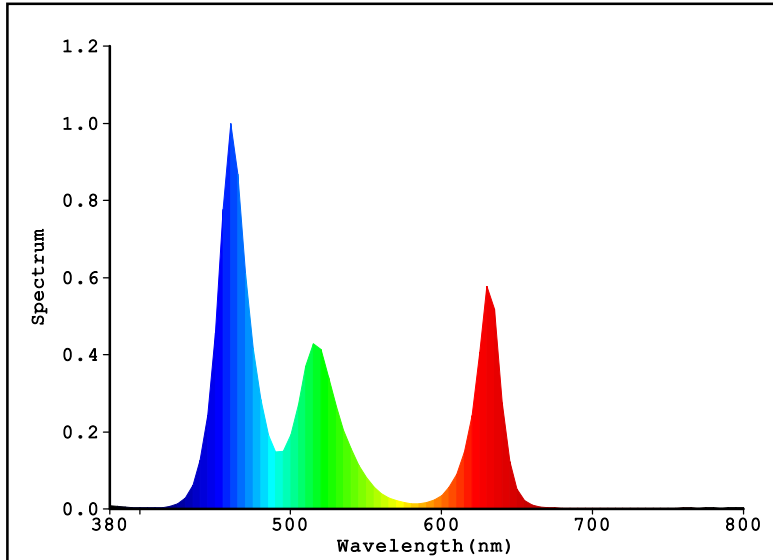

Color Parameters:

Chromaticity Coordinate: $x=0.2337$ $y=0.2251$ / $u'=0.1786$ $v'=0.3871$
 $T_c=100000K$ Dominant WL: $L_d=475.3nm$ Purity: 44.3% Centroid WL: $501.0nm$
Ratio: $R=22.0\%$ $G=64.9\%$ $B=13.1\%$ Peak WL: $L_p=460.0nm$ HWL: $22.2nm$
Render Index: $R_a=45.0$
 $R1 = 27$ $R2 = 53$ $R3 = 71$ $R4 = 50$ $R5 = 49$ $R6 = 53$ $R7 = 59$
 $R8 = -2$ $R9 = -239$ $R10 = -14$ $R11 = 35$ $R12 = 59$ $R13 = 29$ $R14 = 79$ $R15 = 5$

Photo Parameters:

Flux: 829.59 lm Fe: 4.0729 W Efficacy: 29.67 lm/W
LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U= $13.05V$ I= $2.433A$ P= $27.96W$ PF= 0.8808

Instrument Status:

Scan Range: $380.0nm-800.0nm$ Interval: $5.0nm[0]$ $I_p=15021$ ($G=3, D=47$)
REF= 46838 ($R=4$) $\%=-0.358\%$ PMT: 12.1 centigrade [14.5]

Product Type: $14HK00027$
Number: $HG-P56B-18X3WRGB$
Temperature: 25.3 deg
Test Operator: $Arthur$
Software: $V2.00.100$

Manufacturer: $Heguang$ Lighting Co.,Ltd
Test Department: $Heguang$ Lighting Co.,Ltd
Humidity: 65.0%
Test Date: $2014-02-11$ $16:17:58$
Instrument: $PMS-80_V1$ (SN: 1011025)