

HG-P56-105S5-C

It will easily light up your swimming pools at night, and give you the display that even professionals will envy.



Stainless steel PAR56 Swimming pool Lights

Installing P56 swimming pool lamps to your swimming pool means you can also enjoy a swim at night. It also adds to the beauty of both the pool itself and the surrounding area. The combination of lights, music and color will help you create the right atmosphere at the right time and for each state of mind. And we always use lamps with cutting-edge technology to guarantee maximum durability and very low consumption. With PAR56, you can enjoy a unique swimming pool every day.

Specifications


| • | | |
|---|----------------------|--|
| Single Color | W/R/B/G/Y | |
| Cable Connection | 2 wires | |
| Body Material | 316 stainless steel | |
| Size | 177mmD x 102 mmH | |
| LED Type | SMD5050 | |
| Number of LED | 105 | |
| Input Voltage | AC/DC 12V | |
| Frequency | 50~60Hz | |
| Watts Used | 18±1 W | |
| Power Consumption | 1.750A | |
| Lumens per Watt | 53.38 lm/w | |
| Max Lumens: | 1,022.7 lm | |
| Working Temperature -20 ~ $45^{\circ}C$ | | |
| Lighting Angle | 120° | |
| Application | Fresh and salt water | |
| IP Rating | IP.68 | |
| Useful LED Life | 50,000 hrs average | |
| Warranty | 2 years | |
| | | |







Spectrophotocolorimeter Test Report

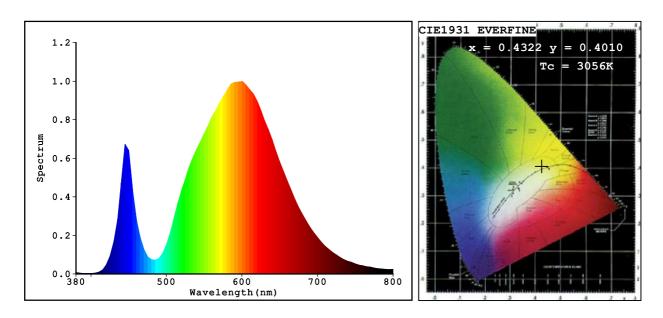

Light Source Test Report

Color Parameters:

Chromaticity Coordinate:x=0.4322 y=0.4010/u'=0.2488 v'=0.5195 Tc=3056K Dominant WL:Ld=582.8nm Purity=50.1% Centroid WL:589.0nm Ratio:R=22.9% G=75.7% B=1.4% Peak WL:Lp=600.0nm HWL:133.0nm Render Index:Ra=72.9 R1 =71 R2 =80 R3 =87 R4 =70 R5 =68 R6 =71 R7 =81 R8 = 54R9 = -12R10=53 R11=64 R12=42 R13=72 R14=92 R15=66

Photo Parameters:

Flux: 1022.7 lm Fe: 3.9815 W Efficacy:53.38 lm/W LEVEL: WHITE:ANSI 3000K

Electrical Parameters:

Luminaire: U=12.96V I=1.750A P=19.16W PF=0.8447

| Instrument Status: | | |
|----------------------------|------------------------------|-----------------------------|
| Scan Range:380.0nm-800.0nm | <pre>Interval:5.0nm[0]</pre> | Ip=45280(G=5,D=55) |
| REF=6995 (R=3) | 8=-0.2628 | PMT: 28.4 centigrade [27.2] |

Product Type:13HD00269 Number: HG-P56-105S5 Temperature:25.3 deg Test Operator:DAMIN Software:V2.00.100 Manufacturer:Heguang Lighting Co.,Ltd Test Department:Heguang Lighting Co.,Ltd Humidity:65.0% Test Date:2013-07-31 15:56:28 Instrument:PMS-80_V1 (SN:1011025)