



HG-UL-6x1W-R

It will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.



Submersible LED Lights



HG-UL LED lights are capable of being placed above or below the water line. This feature allows you to create lighting accents in endless combinations. The LED lights also are capable of being placed underwater exclusively, which means your fish or underwater landscape can become the focal point of your pond experience. HG-UL will easily light up your pond or waterfall at night, and give you the display that even professionals will envy.

Specifications

Single Color	W/R/B/G/Y
Cable Connection	2 wires
Body Material	316 stainless steel + PC
Size	157mmDia x 104 mmH
Number of LED	6 x 1W
Input Voltage	AC/DC 12V
Watts Used	6W
Power Consumption	0.5917 A
Lumens per Watt	84.06 lm/w
Max Lumens:	568.25 lm
Working Temperature	0 - 40 °C
Beam Angle	15/25/30/45/60°
IP Rating	IP.68
Warranty	2 years



Light Source Test Report

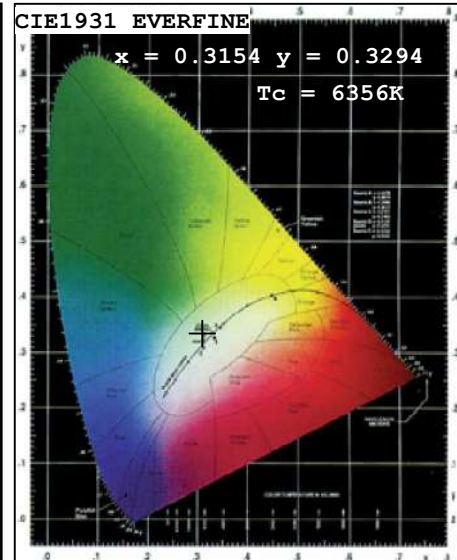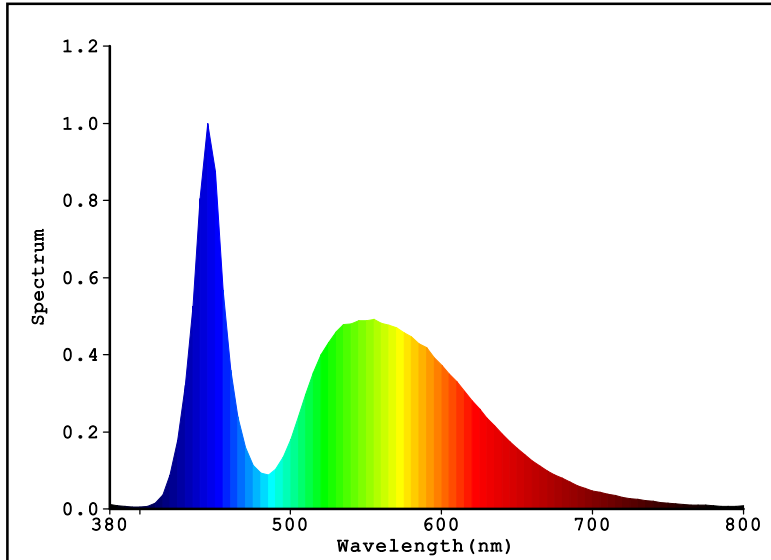

Color Parameters:

Chromaticity Coordinate: $x=0.3154$ $y=0.3294$ / $u'=0.1996$ $v'=0.4689$
Tc=6356K Dominant WL:Ld=488.9nm Purity=6.3% Centroid WL:543.0nm
Ratio:R=13.5% G=83.3% B=3.2% Peak WL:Lp=445.0nm HWL:22.3nm
Render Index:Ra=70.9
R1 =70 R2 =73 R3 =73 R4 =73 R5 =72 R6 =64 R7 =79
R8 =62 R9 =-23 R10=35 R11=72 R12=42 R13=70 R14=85 R15=66

Photo Parameters:

Flux: 568.25 lm Fe: 1.7934 W Efficacy:84.06 lm/W
LEVEL: WHITE:ANSI_6500K

Electrical Parameters:

Luminaire: U=14.35V I=0.5917A P=6.760W PF=0.7961

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=42685 (G=5,D=51)
REF=25447 (R=4) %=-0.198% PMT: 23.4 centigrade [23.8]

Product Type:样品
Number:HG-P30U-6XW正白
Temperature:25.3 deg
Test Operator:
Software:V2.00.100

Manufacturer:Heguang Lighting Co.,LTD
Test Department:Heguang Lighting Co.,LTD
Humidity:65.0%
Test Date:2015-01-29 21:17:07
Instrument:PMS-80_V1 (SN:1011025)