



PROJECT
CATALOG #
TYPE
NOTES


Optional Long Shroud

A-CT5 Up Light LINE-VOLTAGE

The curvilinear, organic shape of the A-CT5 reflects its coastal design inspiration. Inside, a removable circular sleeve houses all components for easy access and servicing. Simply remove the front cap, twist the handle, and remove.

Quick Facts

- Die-cast aluminum
- Two-layer marine-grade anodization and powder coat finish
- Xicato® LED module
- ProAim® adjustability
- Tamper-resistant features
- Removable lighting cartridge
- Dimming: Phase or 0-10V
- Input voltage: 110-277V
- Rating: IP67

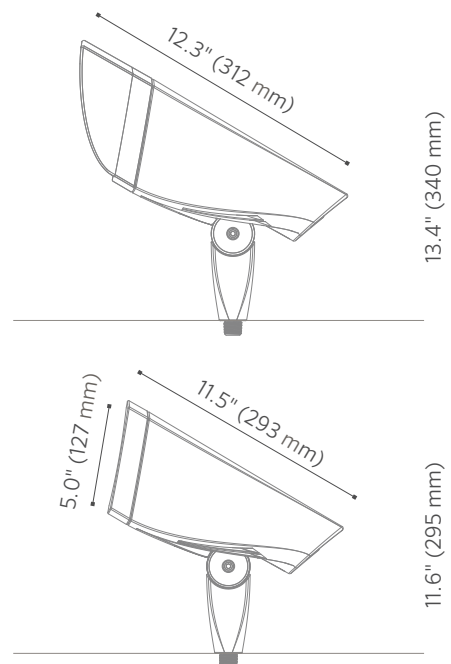

A-CT5 Up Light SPECIFICATIONS

Output	700 lm	1,000 lm	1,300 lm	2,000 lm
Total Lumens[†]	629	867	1,141	1,856
Input Voltage	110-227V	110-227V	110-227V	110-227V
Input Power (W)	7.3	10.8	15.0	23.8
VA	7.5	11.1	15.3	24.0
Efficacy (Lumens/Watt)	87	81	76	78
Color Rendering Index (CRI)	83	83	83	83
Center Beam Candlepower*				
Spot (20°)	2,049	2,848	3,747	6,146
Flood (40°)	1,116	1,548	2,034	3,329
Wide Flood (60°)	661	893	1,208	1,978
Very Wide Flood (90°)	323	434	576	885
Wall Wash (90° x 120°)	281	372	496	771
Dimming	Phase, 0-10 V	Phase, 0-10 V	Phase, 0-10 V	Phase, 0-10 V
Luxor Compatibility				
ZD Option	Luxor CUBE Req'd	Luxor CUBE Req'd	Luxor CUBE Req'd	Luxor CUBE Req'd
Minimum Rated Life (L80)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs

[†] Measured using the flood (40°) optic. Lumen output does not change according to specified CCT.

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast aluminum A380 housing and shroud with stainless steel hardware.

Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking into sealed areas of the fixture via the wiring.

Optics

Beam angle options preinstalled: spot (20°), flood (40°), wide flood (60°), very wide (90°), or wall wash (90° x 120°). Field replaceable.

Lamp

Integrated Xicato® LED module. Next Generation Corrected Cold Phosphor Technology® keeps phosphors cool for maintained light quality and very tight color consistency (within 1 x 2 MacAdam Ellipses). Up to 100+ lumens per watt at operating conditions. CCT range from 2,700K to 4,000K with lumen outputs between 700 and 2,000.

Wiring

UL1015 105C 600V; 18/3 for phase dim driver and 18/5 for 0-10V driver.

Shroud

Vertical and horizontal ½" NPT knockouts. Patented sleeve cover for positioning and alignment from grade.

Housing

Die-cast aluminum housing with capacity up to 2,000 lumens. Removable cartridge contains LED module, optics, and driver into a single assembly.

Power

Three power options: 1) standard voltage using 120V input with phase dimming, 2) universal voltage using 110V to 277V with 0-10V dimming, or 3) high voltage using 220V to 240V with 0-10V dimming.

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

Knuckle

Die-cast aluminum knuckle with ½"-14 NPSM threads. Compress and lock features prevent slip after installation. 5° increments adjustability over 105° of vertical adjustment.

Weight

7.9 lbs. (3.6 kg)

Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

¼-20 x ½" stainless steel angle lock screw (hex) with 8-32 x 7/16" set screw (hex).

Ambient Operating Temperature

0700 lm: -13°F to 122°F (-25°C to 50°C)
 1,000 lm: -13°F to 113°F (-25°C to 45°C)
 1,300 lm: -13°F to 104°F (-25°C to 40°C)
 2,000 lm: -13°F to 95°F (-25°C to 35°C)

Installation Requirements

Designed for installation in upward or downward directions.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.










Warranty

5-year limited warranty

Listings



A-CT5 Up Light ORDERING INFORMATION



Fixture	Power Control	Output	CCT	Optics	Options	Finish	
A-CT5	■ SV Standard Voltage (120V Phase) UL-Listed	■ L07 629 Lumens	■ K27 2,700K	■ SP 20°	■ [default] Standard Shroud	■ BZ Bronze Metallic	
	■ UV Universal Voltage (110-277V, 0-10V NA) UL-Listed	■ L10 867 Lumens	■ K30 3,000K	■ FL 40°	■ LS Long Shroud (45°)	■ DG Desert Granite	
	■ HV High Voltage (220-240V, 0-10V) CE Approved	■ L13 1,141 Lumens	■ K40 4,000K	■ WF 60°		■ WI Weathered Iron	
		■ L20 1,856 Lumens		■ VW 90°		■ SB Sedona Brown	
				■ WW 90° x 120°		■ FB Black	
						■ WG White Gloss	
						■ FW Flat White	
						■ AL Almond	
					■ SV Silver		

EXAMPLE FIXTURE CONFIGURATION: A-CT5-SV-L10-K30-FL-LS-BZ


A-CT5 - - - - - -

A-CT5 Up Light ORDERING INFORMATION





LUXOR CUBES: Specify Separately

Item	Code	
HV CUBE 120V Phase Dimming Module	LCM-HV	
0-10V CUBE 0-10V and Relay Module	LCM-RLY-010V	



RISER OPTIONS: Specify Separately

Riser	Code	
RISER 0.8" (21 mm) Diameter	YY-R-XX*	




MOUNTING OPTIONS: Specify Separately

Mounts	Code	
GROUND MOUNT 2.7" (67 mm) Diameter	GM-XX*	
WALL PLATE: 1-GANG 3.4" (85 mm) x 5.1" (129 mm)	WP-1G-050-XX*	
WALL PLATE: ROUND 5.0" (127 mm) Diameter	WP-RD-050-XX*	
VERSABOX® 2.2" (57 mm) x 1.5" (39 mm)	VB-050-XX*	

LENS ACCESSORIES: Specify Separately

Item	Code	
HEX BAFFLE 3.0" (76 mm)	LENS-76-HEX	
LINEAR SPREAD LENS 3.0" (76 mm)	LENS-76-SPRL	
SOLITE SPREAD LENS 3.0" (76 mm)	LENS-76-SPRS	
FROSTED LENS 3.0" (76 mm)	LENS-76-FRST	
RED DICHROIC LENS 3.0" (76 mm)	LENS-76-RED	
GREEN DICHROIC LENS 3.0" (76 mm)	LENS-76-GRN	
BLUE DICHROIC LENS 3.0" (76 mm)	LENS-76-BLU	

COUPLING OPTIONS: Specify Separately

Couplings	Code	
STRAIGHT 1.3" (32 mm) x 2.0" (51 mm)	COUP-XX*	
90° ELBOW 1.3" (32 mm) x 2.0" (51 mm)	ELBW-050-XX*	
T-MOUNT 3.0" (76 mm) x 2.2" (57 mm)	TMNT-050-XX*	

*YY = riser height in inches (6" increments between 6" and 36")
 XX = finish code

A-CT5 Up Light PHOTOMETRICS

A-CT5 700 Lumens 20°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 24.4°	Horizontal 24.0°
4.0' (1.2 m)	31.5 fc (339 lx)	1.7' (0.5 m)	1.7' (0.5 m)
8.0' (2.4 m)	7.9 fc (85 lx)	3.5' (1.1 m)	3.4' (1.1 m)
12.0' (3.7 m)	3.5 fc (38 lx)	5.2' (1.6 m)	5.1' (1.6 m)
16.0' (4.9 m)	1.0 fc (11 lx)	6.9' (2.1 m)	6.8' (2.1 m)
20.0' (6.1 m)	1.3 fc (14 lx)	8.7' (2.7 m)	8.5' (2.6 m)
24.0' (7.3 m)	0.9 fc (10 lx)	10.4' (3.2 m)	10.1 ft (3.1 m)

A-CT5 700 Lumens 40°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 43.4°	Horizontal 43.5°
4.0' (1.2 m)	37.0 fc (398 lx)	3.2' (1.0 m)	3.2' (1.0 m)
8.0' (2.4 m)	9.3 fc (100 lx)	6.4' (2.0 m)	6.4' (2.0 m)
12.0' (3.7 m)	4.1 fc (44 lx)	9.6' (2.9 m)	9.6' (2.9 m)
16.0' (4.9 m)	2.3 fc (25 lx)	12.7' (3.9 m)	12.7' (3.9 m)
20.0' (6.1 m)	1.5 fc (16 lx)	15.9' (4.8 m)	15.9' (4.8 m)
24.0' (7.3 m)	1.0 fc (11 lx)	19.1' (5.8 m)	19.1' (5.8 m)

A-CT5 700 Lumens 60°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 58.8°	Horizontal 58.0°
4.0' (1.2 m)	30.2 fc (325 lx)	4.5' (1.4 m)	4.4' (1.3 m)
8.0' (2.4 m)	7.6 fc (82 lx)	9.0' (2.7 m)	8.9' (2.7 m)
12.0' (3.7 m)	3.4 fc (37 lx)	13.5' (4.1 m)	13.3' (4.1 m)
16.0' (4.9 m)	1.9 fc (21 lx)	18.0' (5.5 m)	17.7' (5.4 m)t
20.0' (6.1 m)	1.2 fc (13 lx)	22.5' (6.9 m)	22.2' (6.8 m)
24.0' (7.3 m)	0.8 fc (9 lx)	27.0' (8.2 m)	26.6' (8.1 m)

A-CT5 700 Lumens 90°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 91.8°	Horizontal 92.0°
4.0' (1.2 m)	20.1 fc (216 lx)	8.3' (2.5 m)	8.3' (2.5 m)
8.0' (2.4 m)	5.0 fc (54 lx)	16.5' (5.0 m)	16.6' (5.1 m)
12.0' (3.7 m)	2.2 fc (24 lx)	24.8' (7.6 m)	24.9' (7.6 m)
16.0' (4.9 m)	1.3 fc (14 lx)	33.0' (10.1 m)	33.1' (10.1 m)
20.0' (6.1 m)	0.8 fc (9 lx)	41.3' (12.6 m)	41.4' (12.6 m)
24.0' (7.3 m)	0.5 fc (5 lx)	49.6' (15.1 m)	49.7' (15.1 m)

A-CT5 700 Lumens 90-120°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 92.6°	Horizontal 112.6°
4.0' (1.2 m)	17.5 fc (188 lx)	8.4' (2.6 m)	12.0' (3.7 m)
8.0' (2.4 m)	4.4 fc (47 lx)	16.7' (5.1 m)	24.0' (7.3 m)
12.0' (3.7 m)	1.9 fc (21 lx)	25.1' (7.7 m)	36.0' (11.0 m)
16.0' (4.9 m)	1.1 fc (12 lx)	33.5' (10.2 m)	48.0' (14.6 m)
20.0' (6.1 m)	0.7 fc (8 lx)	41.9' (12.8 m)	60.0' (18.3 m)
24.0' (7.3 m)	0.5 fc (5 lx)	50.2' (15.3 m)	71.9' (21.9 m)

A-CT5 1,000 Lumens 20°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 23.4°	Horizontal 23.5°
4.0' (1.2 m)	46.6 fc (502 lx)	1.7' (0.5 m)	1.7' (0.5 m)
8.0' (2.4 m)	11.7 fc (126 lx)	3.3' (1.0 m)	3.3' (1.0 m)
12.0' (3.7 m)	5.2 fc (56 lx)	5.0' (1.5 m)	5.0' (1.5 m)
16.0' (4.9 m)	2.9 fc (31 lx)	6.6' (2.0 m)	6.7' (2.0 m)
20.0' (6.1 m)	1.9 fc (21 lx)	8.3' (2.5 m)	8.3' (2.5 m)
24.0' (7.3 m)	1.3 fc (14 lx)	9.9' (3.0 m)	10.0' (3.0 m)

A-CT5 1,000 Lumens 40°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 43.6°	Horizontal 43.4°
4.0' (1.2 m)	54.3 fc (585 lx)	3.2' (1.0 m)	3.2' (1.0 m)
8.0' (2.4 m)	13.6 fc (146 lx)	6.4' (2.0 m)	6.4' (2.0 m)
12.0' (3.7 m)	6.0 fc (65 lx)	9.6' (2.9 m)	9.6' (2.9 m)
16.0' (4.9 m)	3.4 fc (37 lx)	12.8' (3.9 m)	12.7' (3.9 m)
20.0' (6.1 m)	2.2 fc (24 lx)	16.0' (4.8 m)	15.9' (4.8 m)
24.0' (7.3 m)	1.5 fc (16 lx)	19.2' (5.8 m)	19.1' (5.8 m)

A-CT5 1,000 Lumens 40° Long Shroud

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 44.1°	Horizontal 43.0°
4.0' (1.2 m)	58.1 fc (625 lx)	3.2' (1.0 m)	3.2' (1.0 m)
8.0' (2.4 m)	14.5 fc (156 lx)	6.5' (2.0 m)	6.3' (2.0 m)
12.0' (3.7 m)	6.5 fc (70 lx)	9.7' (3.0 m)	9.5' (2.9 m)
16.0' (4.9 m)	3.6 fc (39 lx)	13.0' (4.0 m)	12.6' (3.8 m)
20.0' (6.1 m)	2.3 fc (25 lx)	16.2' (4.9 m)	15.8' (4.8 m)
24.0' (7.3 m)	1.6 fc (17 lx)	19.4' (5.9 m)	18.9' (5.8 m)

A-CT5 Up Light PHOTOMETRICS

A-CT5 1,000 Lumens 60°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 58.3°	Horizontal 58.1°
4.0' (1.2 m)	45.7 fc (492 lx)	4.5' (1.4 m)	4.4' (1.4 m)
8.0' (2.4 m)	11.4 fc (123 lx)	8.9' (2.7 m)	8.9' (2.7 m)
12.0' (3.7 m)	5.1 fc (55 lx)	13.4' (4.1 m)	13.3' (4.1 m)
16.0' (4.9 m)	2.9 fc (31 lx)	17.8' (5.4 m)	17.8' (5.4 m)
20.0' (6.1 m)	1.8 fc (19 lx)	22.3' (6.8 m)	22.2' (6.8 m)
24.0' (7.3 m)	1.3 fc (14 lx)	26.8' (8.2 m)	26.7' (8.2 m)

A-CT5 1,000 Lumens 90°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 91.6°	Horizontal 91.9°
4.0' (1.2 m)	27.0 fc (291 lx)	8.2' (2.5 m)	8.3' (2.5 m)
8.0' (2.4 m)	6.7 fc (73 lx)	16.5' (5.0 m)	16.6' (5.0 m)
12.0' (3.7 m)	3.0 fc (32 lx)	24.7' (7.5 m)	24.8' (7.5 m)
16.0' (4.9 m)	1.7 fc (18 lx)	32.9' (10.0 m)	33.1' (10.1 m)
20.0' (6.1 m)	1.1 fc (12 lx)	41.1' (12.5 m)	41.4' (12.6 m)
24.0' (7.3 m)	0.8 fc (9 lx)	49.4' (15.1 m)	49.7' (15.1 m)

A-CT5 1,000 Lumens 90-120°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 92.6°	Horizontal 112.9°
4.0' (1.2 m)	23.2 fc (250 lx)	8.4' (2.6 m)	12.1' (3.7 m)
8.0' (2.4 m)	5.8 fc (62 lx)	16.8' (5.1 m)	24.1' (7.3 m)
12.0' (3.7 m)	2.6 fc (28 lx)	25.1' (7.7 m)	36.2' (11.0 m)
16.0' (4.9 m)	1.5 fc (16 lx)	33.5' (10.2 m)	48.2' (14.7 m)
20.0' (6.1 m)	0.9 fc (10 lx)	41.9' (12.8 m)	60.3' (18.4 m)
24.0' (7.3 m)	0.6 fc (7 lx)	50.3' (15.3 m)	72.4' (22.1 m)

A-CT5 1,300 Lumens 20°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 24.6°	Horizontal 23.5°
4.0' (1.2 m)	54.8 fc (590 lx)	1.7' (0.5 m)	1.7' (0.5 m)
8.0' (2.4 m)	13.7 fc (148 lx)	3.5' (1.1 m)	3.3' (1.0 m)
12.0' (3.7 m)	6.1 fc (66 lx)	5.2' (1.6 m)	5.0' (1.5 m)
16.0' (4.9 m)	3.4 fc (37 lx)	7.0' (2.1 m)	6.6' (2.0 m)
20.0' (6.1 m)	2.2 fc (24 lx)	8.7' (2.7 m)	8.3' (2.5 m)
24.0' (7.3 m)	1.5 fc (16 lx)	10.5' (3.2 m)	10.0' (3.0 m)

A-CT5 1,300 Lumens 40°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 43.6°	Horizontal 43.5°
4.0' (1.2 m)	70.4 fc (758 lx)	3.2' (1.0 m)	3.2' (1.0 m)
8.0' (2.4 m)	17.6 fc (190 lx)	6.4' (2.0 m)	6.4' (2.0 m)
12.0' (3.7 m)	7.8 fc (84 lx)	9.6' (2.9 m)	9.6' (2.9 m)
16.0' (4.9 m)	4.4 fc (47 lx)	12.8' (3.9 m)	12.8' (3.9 m)
20.0' (6.1 m)	2.8 fc (30 lx)	16.0' (4.9 m)	16.0' (4.9 m)
24.0' (7.3 m)	2.0 fc (22 lx)	19.2' (5.9 m)	19.2' (5.9 m)

A-CT5 1,300 Lumens 60°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 58.2°	Horizontal 57.7°
4.0' (1.2 m)	58.2 fc (627 lx)	4.5' (1.4 m)	4.4' (1.4 m)
8.0' (2.4 m)	14.5 fc (156 lx)	8.9' (2.7 m)	8.8' (2.7 m)
12.0' (3.7 m)	6.5 fc (70 lx)	13.4' (4.1 m)	13.2' (4.0 m)
16.0' (4.9 m)	3.7 fc (40 lx)	17.8' (5.4 m)	17.6' (5.4 m)
20.0' (6.1 m)	2.3 fc (25 lx)	22.3' (6.8 m)	22.0' (6.7 m)
24.0' (7.3 m)	1.6 fc (17 lx)	26.7' (8.2 m)	26.5' (8.1 m)

A-CT5 1,300 Lumens 90°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 91.4°	
4.0' (1.2 m)	38.5 fc (414 lx)	8.2' (2.5 m)	
8.0' (2.4 m)	9.0 fc (97 lx)	16.4' (5.0 m)	
12.0' (3.7 m)	4.0 fc (43 lx)	24.6' (7.5 m)	
16.0' (4.9 m)	2.2 fc (24 lx)	32.8' (10.0 m)	
20.0' (6.1 m)	1.4 fc (15 lx)	41.0' (12.5 m)	
24.0' (7.3 m)	1.0 fc (11 lx)	49.2' (15.0 m)	

A-CT5 1,300 Lumens 90-120°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 92.8°	Horizontal 112.2°
4.0' (1.2 m)	30.9 fc (333 lx)	8.4' (2.6 m)	11.9' (3.6 m)
8.0' (2.4 m)	7.7 fc (83 lx)	16.8' (5.1 m)	23.8' (7.3 m)
12.0' (3.7 m)	3.4 fc (37 lx)	25.2' (7.7 m)	35.7' (10.9 m)
16.0' (4.9 m)	1.9 fc (21 lx)	33.6' (10.2 m)	47.6' (14.5 m)
20.0' (6.1 m)	1.2 fc (13 lx)	42.0' (12.8 m)	59.5' (18.1 m)
24.0' (7.3 m)	0.9 fc (10 lx)	50.4' (15.4 m)	71.4' (21.8 m)

A-CT5 Up Light PHOTOMETRICS

A-CT5 2,000 Lumens 20°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 24.0°	Horizontal 24.3°
4.0' (1.2 m)	89.7 fc (966 lx)	1.7' (0.5 m)	1.7' (0.5 m)
8.0' (2.4 m)	22.4 fc (241 lx)	3.4' (1.1 m)	3.4' (1.1 m)
12.0' (3.7 m)	10.0 fc (108 lx)	5.1' (1.6 m)	5.2' (1.6 m)
16.0' (4.9 m)	5.6 fc (60 lx)	6.8' (2.1 m)	6.9' (2.1 m)
20.0' (6.1 m)	3.6 fc (39 lx)	8.5' (2.6 m)	8.6' (2.6 m)
24.0' (7.3 m)	2.5 fc (27 lx)	10.2' (3.1 m)	10.3' (3.1 m)

A-CT5 2,000 Lumens 40°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 42.9°	Horizontal 43.5°
4.0' (1.2 m)	110.0 fc (1,184 lx)	3.1' (0.9 m)	3.2' (1.0 m)
8.0' (2.4 m)	27.5 fc (296 lx)	6.3' (1.9 m)	6.4' (2.0 m)
12.0' (3.7 m)	12.2 fc (131 lx)	9.4' (2.9 m)	9.6' (2.9 m)
16.0' (4.9 m)	6.9 fc (74 lx)	12.6' (3.8 m)	12.8' (3.9 m)
20.0' (6.1 m)	4.4 fc (47 lx)	15.7' (4.8 m)	16.0' (4.9 m)
24.0' (7.3 m)	3.1 fc (33 lx)	18.8' (5.7 m)	19.2' (5.9 m)

A-CT5 2,000 Lumens 60°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 57.7°	Horizontal 57.9°
4.0' (1.2 m)	90.9 fc (978 lx)	4.4' (1.3 m)	4.4' (1.3 m)
8.0' (2.4 m)	22.7 fc (244 lx)	8.8' (2.7 m)	8.8' (2.7 m)
12.0' (3.7 m)	10.1 fc (109 lx)	13.2' (4.0 m)	13.3' (4.0 m)
16.0' (4.9 m)	5.7 fc (61 lx)	17.6' (5.4 m)	17.7' (5.4 m)
20.0' (6.1 m)	3.6 fc (39 lx)	22.0' (6.7 m)	22.1' (6.7 m)
24.0' (7.3 m)	2.5 fc (27 lx)	26.4' (8.0 m)	26.5' (8.0 m)

A-CT5 2,000 Lumens 60° Long Shroud

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 54.0°	Horizontal 50.4°
4.0' (1.2 m)	102.0 fc (1,098 lx)	4.1' (1.2 m)	3.8' (1.2 m)
8.0' (2.4 m)	25.5 fc (275 lx)	8.1' (2.5 m)	7.5' (2.3 m)
12.0' (3.7 m)	11.3 fc (122 lx)	12.1' (3.7 m)	11.3' (3.4 m)
16.0' (4.9 m)	6.4 fc (69 lx)	16.3' (5.0 m)	15.1' (4.6 m)
20.0' (6.1 m)	4.1 fc (44 lx)	20.4' (6.2 m)	18.8' (5.7 m)
24.0' (7.3 m)	2.8 fc (30 lx)	24.4' (7.4 m)	22.6' (6.9 m)

A-CT5 2,000 Lumens 90-120°

Feet (Meters)	Center Beam Fc (Lx)	Beam Width	
		Vertical 91.5°	Horizontal 91.9°
4.0' (1.2 m)	55.0 fc (592 lx)	8.2' (2.5 m)	8.3' (2.5 m)
8.0' (2.4 m)	13.8 fc (149 lx)	16.4' (5.0 m)	16.5' (5.0 m)
12.0' (3.7 m)	6.1 fc (66 lx)	24.6' (7.5 m)	24.8' (7.5 m)
16.0' (4.9 m)	3.4 fc (37 lx)	32.8' (10.0 m)	33.1' (10.1 m)
20.0' (6.1 m)	2.2 fc (24 lx)	41.0' (12.5 m)	41.1' (12.5 m)
24.0' (7.3 m)	1.5 fc (16 lx)	49.3' (15.0 m)	49.6' (12.5 m)

Xicato and Corrected Cold Phosphor Technology are trademarks of Xicato Inc. MoistureBlock is a trademark of DSM&T Co. Inc.

© 2020 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries. Xicato and Corrected Cold Phosphor Technology are trademarks of Xicato Inc. Moisture-Block is a trademark of DSM&T Co. Inc.