

VW-31 Vantage Petite Wall Wash

STANDARD BASE



PROJECT

CATALOG #


TYPE

NOTES

Packed with power, the Vantage VW-31 Petite Wall Wash features a minimal footprint that allows it to blend easily into any landscape. Compared to other fixtures in its class, this mini wall wash is 25% smaller yet generates a greater lumen output. This allows it to integrate seamlessly into low-lying foundations and intimate garden spaces without being seen. With a frosted lens and wide-beam design that produces even light patterns, it's ideal for creating transitional, fill, or highlighting effects for small to medium points of interest.

Quick Facts

- Small footprint allows fixture to easily blend into any landscape
- Frosted glass lens provides soft, even light distribution
- Wide-beam design produces smooth illumination with no hot spots
- Compatible with MR-11 lamps

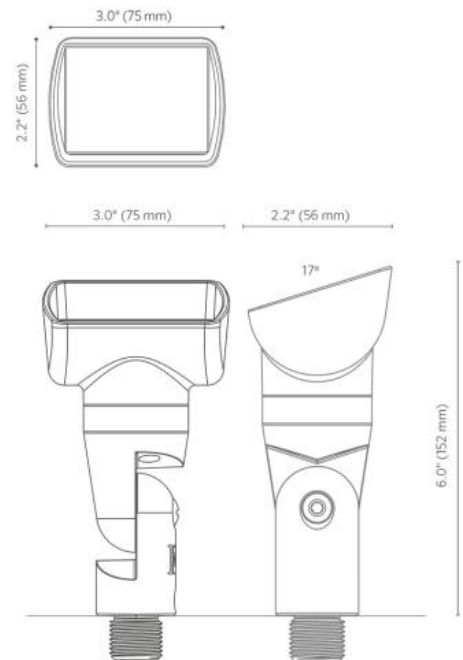

VW-31 Vantage Petite Wall Wash SPECIFICATIONS

	ECO20WFL	ECO20SFL
Total Lumens (lm)	115	120
Power Consumption (VA)	3.4	3.4
Efficacy (lm/W)	53	55
Correlated Color Temperature (CCT)	2700K	3000K
CRI (Ra)	87	87
Beam Angle	32	32
Maximum Candela (cd)	285	285
Input Voltage (V)	12	12
Minimum Rated Life (L70)	30,000 Hrs	30,000 Hrs

VW-31 Vantage Petite Wall Wash SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

Die-cast A380 aluminum housing and shield with stainless steel hardware. Die-cast zinc/aluminum alloy knuckle.

LED

MR-11 LED

Optics

Ultra-wide batwing diffusion

Threads

1/2"-14 NPSM

Adjustability

Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.

Finish

Two-layer protection of marine-grade anodization and polyester TGIC powder-coat finish, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Stainless steel angle lock screw. Includes 10" (254 mm) ABS slotted installation spike.

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) length

Sockets

MR-11 GU4 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.

Glare Control

15° angled shield

Weight

1.3 lb (0.6 kg)

Lens

Frosted borosilicate glass

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Input Voltage

10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Installation Requirements

Designed for installation in the upward direction only

Control

Though not included, the Luxor™ Low-Voltage CUBE (LCM-LV) can be used as a ZD option that uses Luxor Technology to zone light fixtures in up to 250 groups and dim each group in 1% increments between 0 and 100%. An installed Luxor Controller is required to perform these actions.

Manufacturing

9001:2015 ISO certified facility

Warranty

10-year limited warranty on fixture; 3-year limited warranty on LED lamp

Listings



VW-31 Vantage Petite Wall Wash

ORDERING INFORMATION

[field_spec_builder_mount] [field_spec_builder_mount]














Fixture	Power	Finish
VW-31	ECO20WFL 6.0 VA, 2700K, 30° LED MR-11 lamp (ECO lamp series)	BZ Bronze Metallic
	ECO20SFL 3.3 VA, 3000K, 35° LED MR-11 lamp (ECO lamp series)	FB Black
	NL Lamp not included	DG Desert Granite
		WI Weathered Iron
		SB Sedona Brown
		FW Flat White
		SV Silver



EXAMPLE FIXTURE CONFIGURATION: VW-31-XX-XXXX-XX



VW-31 Vantage Petite Wall Wash ORDERING INFORMATION



MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.		Mounts	Catalog No.	
Long Slot Spike	250015840000		Three-Prong Spike	250020020000	
Lock Ring	250030410000SP		Super Slot Spike	753900	
Gutter Mount	GM-SS		Ground Mount for 2.0" Schedule 40 Post Mounting with 1/2" Thread	GM-XX*	
Mini J-Box for 1/2" Thread	MJB-050-XX*		ProAim® Ratcheting Spike	PARS	
Post Mount for 1.5" Schedule 40 Post Mounting with 1/2" Thread	PM-XX*		Super J-Box Spike	SJ-XX*	
TreeBox® Mount with 1/2" Thread	TB-XX*		VersaBox® Mount with 1/2" Thread	VB-050-XX*	
Variable Height Riser for Up Lights	VHR-UL				

VW-31 Vantage Petite Wall Wash ORDERING INFORMATION

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Luxor CUBE- Low-voltage	LCM-LV	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	

Power	Catalog No.	
Plug-In Transformer, 6 W	MT-6W	
Surge Protection Module	SURGE-MOD	
-		