



HG-PL-15W-C  
(S5730)

*It will easily light up your swimming pools at night, and give you the display that even professionals will envy.*



## LED Surface Mounted Swimming Pool Light



Installing P56M swimming pool lamps to your swimming pool means you can also enjoy a swim at night. It also adds to the beauty of both the pool itself and the surrounding area. The combination of lights, music and color will help you create the right atmosphere at the right time and for each state of mind. And we always use lamps with cutting-edge technology to guarantee maximum durability and very low consumption. With PAR56M , you can enjoy a unique swimming pool every day.

### Specifications

Single Color	W/R/B/G/Y
Cable Connection	2 wires
Body Material	ABS + Transparent PC cover
Dimension	250mmD x 47mmH
LED Type	SMD5730
Number of LED	36
Input Voltage	AC/DC 12V
Frequency	50~60Hz
Watts Used	16±1W
Power Consumption	1.161 A
Lumens per Watt	71.60 lm/w
Max Lumens:	1104.5 lm
Working Temperature	0 - 40 °C
Lighting Angle	120°
Application	Fresh and salt water
IP Rating	IP.68
Useful LED Life	30,000 hrs average
Warranty	2 years



### Light Source Test Report

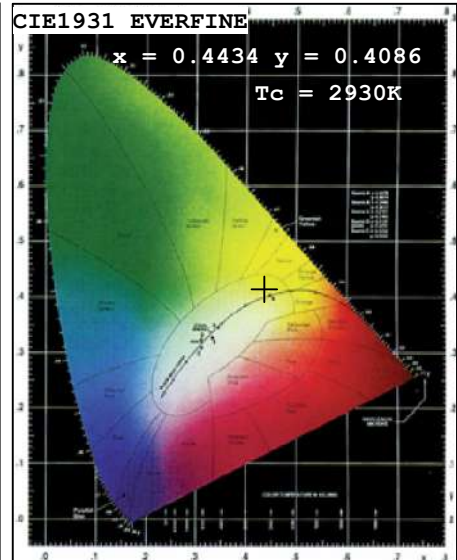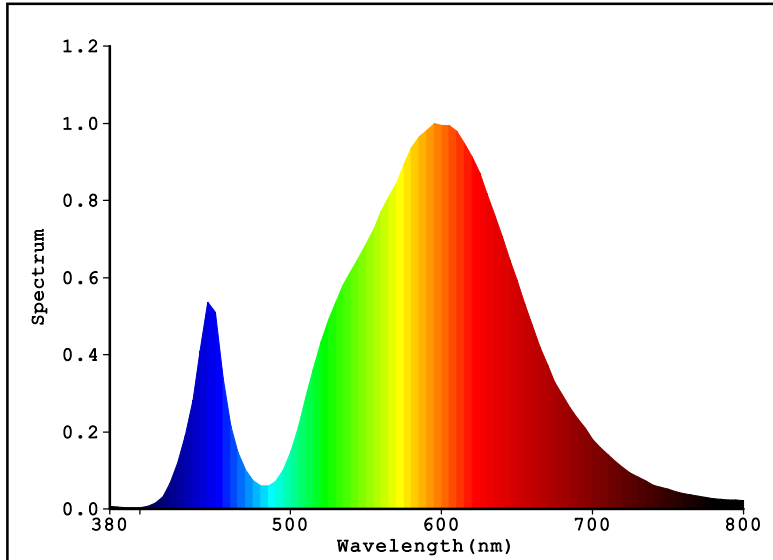

#### Color Parameters:

Chromaticity Coordinate:  $x=0.4434$   $y=0.4086$   $u'=0.2528$   $v'=0.5241$   
Tc=2930K Dominant WL:Ld=582.8nm Purity=55.7% Centroid WL:591.0nm  
Ratio:R=23.8% G=75.0% B=1.2% Peak WL:Lp=595.0nm HWL:132.1nm  
Render Index:Ra=73.4  
R1 =71 R2 =81 R3 =88 R4 =72 R5 =69 R6 =72 R7 =81  
R8 =53 R9 =-12 R10=54 R11=67 R12=44 R13=72 R14=93 R15=66

#### Photo Parameters:

Flux: 1104.5 lm Fe: 3.3019 W Efficacy:71.60 lm/W  
LEVEL: WHITE:ANSI\_3000K

#### Electrical Parameters:

Luminaire: U=16.09V I=1.161A P=15.43W PF=0.8263

#### Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=38455 (G=5,D=48)  
REF=6239 (R=3) %=-0.342% PMT: 18.9 centigrade [19.5]

Product Type:16HH00010  
Number:HG-FTN-000000013  
Temperature:25.3 deg  
Test Operator:  
Software:V2.00.100

Manufacturer:Heguang Lighting Co.,Ltd  
Test Department:Heguang Lighting Co.,Ltd  
Humidity:65.0%  
Test Date:2016-01-13 15:57:37  
Instrument:PMS-80\_V1 (SN:1011025)