



HG-P56-315S3-C

It will easily light up your swimming pools at night, and give you the display that even professionals will envy.



Stainless steel PAR56 Swimming pool Lights



Installing P56 swimming pool lamps to your swimming pool means you can also enjoy a swim at night. It also adds to the beauty of both the pool itself and the surrounding area. The combination of lights, music and color will help you create the right atmosphere at the right time and for each state of mind. And we always use lamps with cutting-edge technology to guarantee maximum durability and very low consumption. With PAR56 , you can enjoy a unique swimming pool every day.

Specifications

Single Color	W/R/B/G/Y
Cable Connection	2 wires
Body Material	316 stainless steel
Size	177mmD x 102 mmH
LED Type	SMD3528
Number of LED	315
Input Voltage	AC/DC 12V
Frequency	50~60Hz
Watts Used	18±1 W
Power Consumption	1.688A
Lumens per Watt	65.40lm/w
Max Lumens:	1,264.7 lm
Working Temperature	-20 ~ 45°C
Lighting Angle	120°
Application	Fresh and salt water
IP Rating	IP.68
Useful LED Life	50,000 hrs average
Warranty	2 years



Light Source Test Report

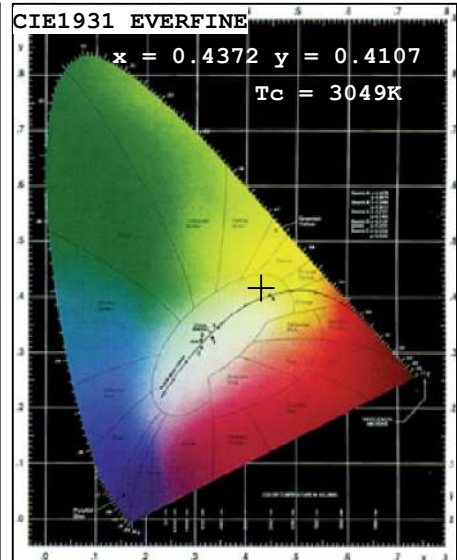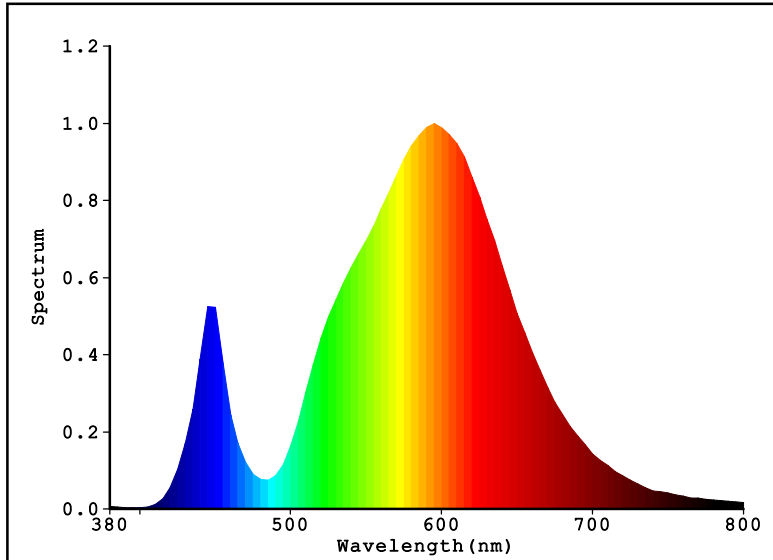

Color Parameters:

Chromaticity Coordinate: $x=0.4372$ $y=0.4107$ / $u'=0.2479$ $v'=0.5240$
Tc=3049K Dominant WL:Ld=581.7nm Purity=54.5% Centroid WL:587.0nm
Ratio:R=22.7% G=76.0% B=1.3% Peak WL:Lp=595.0nm HWL:125.8nm
Render Index:Ra=71.8
R1 =69 R2 =80 R3 =89 R4 =70 R5 =67 R6 =71 R7 =81
R8 =49 R9 =-24 R10=52 R11=64 R12=42 R13=70 R14=93 R15=62

Photo Parameters:

Flux: 1264.7 lm Fe: 3.6453 W Efficacy:65.40 lm/W
LEVEL: WHITE:ANSI_3000K

Electrical Parameters:

Luminaire: U=13.46V I=1.688A P=19.34W PF=0.8514

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]
REF=7355(R=3) %=-0.318%

Ip=41271(G=5,D=53)
PMT: 28.1 centigrade [28.0]

Product Type:15HF00419
Number:HG-P56-315S3
Temperature:25.3 deg
Test Operator:
Software:V2.00.100

Manufacturer:Heguang Lighting Co.,LTD
Test Department:Heguang Lighting Co.,LTD
Humidity:65.0%
Test Date:2015-07-24 13:35:21
Instrument:PMS-80_V1 (SN:1011025)